


Malaysian Construction Research Journal

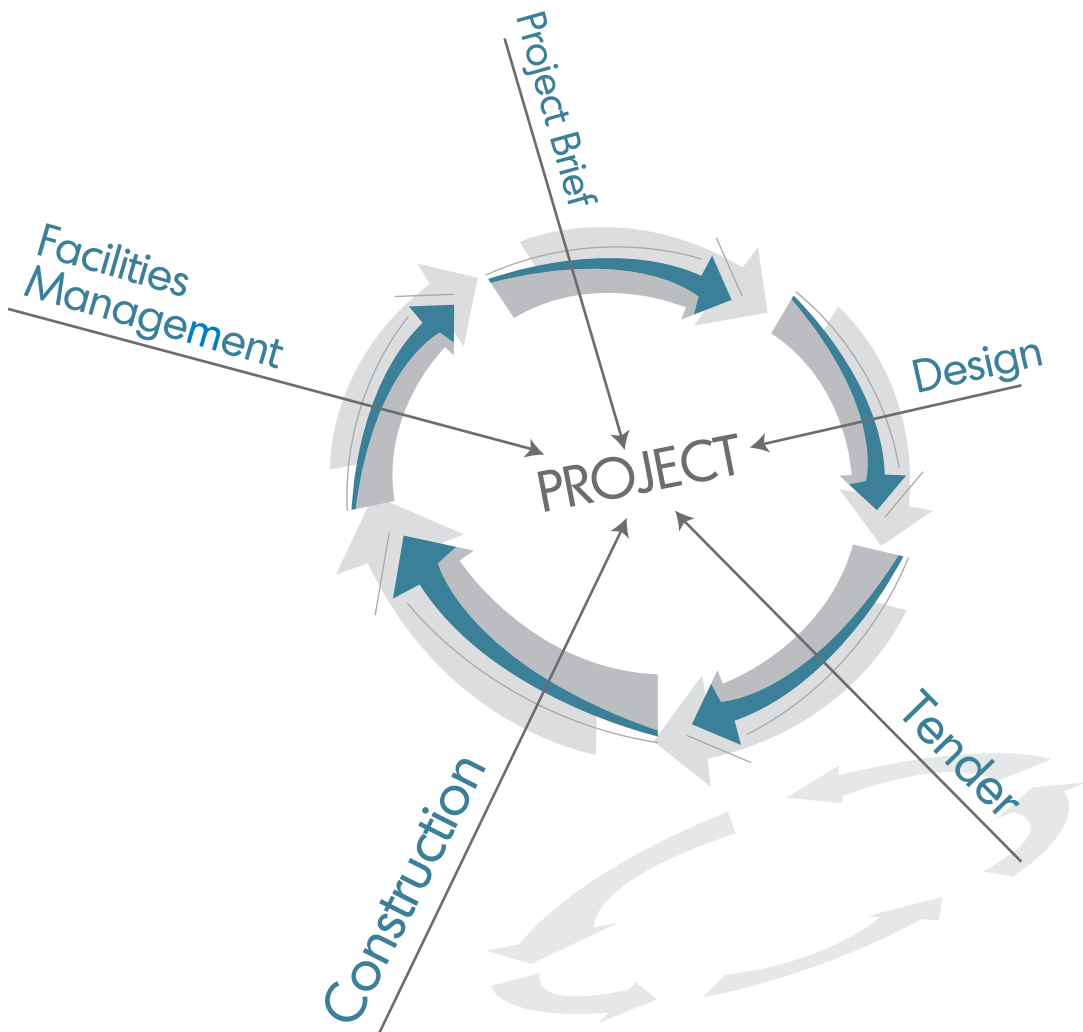

MALAYSIAN CONSTRUCTION RESEARCH JOURNAL (MCRJ)

Volume 46 | No. 2 | 2025

The Malaysian Construction Research Journal is indexed in

**Scopus Elsevier, ASEAN Citation Index
and MyJurnal**

ISSN No. : 1985 – 3807
eISSN No. : 2590 – 4140

Construction Research Institute of Malaysia (CREAM)
Level 14, CIDB 520, The MET Corporate Towers,
No. 20, Jalan Dutamas 2,
50480 Wilayah Persekutuan,
Kuala Lumpur, MALAYSIA.

This page intentionally left blank

Contents

Editorial Advisory Board	iv
Editorial	ix
SUSTAINABLE GROUND IMPROVEMENT USING BAMBOO- GEOTEXTILE REINFORCEMENT AND REAL-TIME MONITORING WITH FIBER OPTIC TECHNOLOGY Nasfiza Mokhtar, Adnan Zainorabidin, Kasbi Basri, Bun Pin Tee, Low Kaw Sai and Sher Ern Chong	1
STRATEGIC AGILITY: NAVIGATING THE PAKISTANI CONSTRUCTION INDUSTRY THROUGH AGILE SOLUTIONS Jahanzeb Asim and Muneera Esa	15
SUSTAINABLE DESIGN CRITERIA FOR GREEN OFFICE BUILDINGS Shalini Sanmargaraja, Abdullateef Olanrewaju, Muhammad Tarique Lakhiar, Chong Hooi Lim, Vignes Ponniah and Anselm Dass Mathalamuthu	33
ASSESSING ARTIFICIAL INTELLIGENCE (AI) ADOPTION LEVELS IN THE CONSTRUCTION INDUSTRIES OF ZAMBIA AND KENYA Maria Achieng Akulu, Charles Kahanji, Rahimi A. Rahman and Erastus Misheng'u Mwanaumo	47
UNLOCKING SUSTAINABLE FUTURES: A SYSTEMATIC REVIEW ON THE BENEFITS OF INDUSTRIALIZED BUILDING SYSTEM (IBS) Nadzirah Zainordin, Lou Hai Loon, Sui Lai Khoo, Mohammad Fadhil Mohammad, Ahmad Faris Omar, Salmaliza Salleh, Quoc-Bao Bui and Le To Quyen	59
EXPLORING THE SYNERGY BETWEEN DIGITALISATION AND SUSTAINABILITY: INSIGHTS FROM MALAYSIAN QUANTITY SURVEYORS Sui Lai Khoo, Nadzirah Zainordin, Norshakila Muhamad Rawai, Mohammad Reizal Mohammad Ali and Edna Bujang Safawi	71
INTEGRATED OF SAFETY PERFORMANCE VIA PROJECT MANAGERS' COMPETENCIES IN GREEN CONSTRUCTION: A REVIEW OF ASSESSMENT COMPONENTS AND CONCEPTUAL FRAMEWORK Jannatun Naemah Ismam, Ida Nianti Mohd Zin and Natasha Khalil	87
ANALYSING SUCCESS FACTORS OF FACILITIES MANAGEMENT IMPLEMENTATION INTERDEPENDENCIES IN HEALTHCARE USING INTERPRETIVE STRUCTURAL MODELLING Nur Azrin Ahmad Pakrudin, Mat Naim Abdullah @ Mohd Asmoni, Hariati Abdullah Hashim, Mohd Nadzri Jaafar, Noorizan Ahmad and Ahmad Sha'rainon Md Shaarani	101

The contents of the published articles do not represent the views of the Editorial Committee and Construction Research Institute of Malaysia

Editorial Advisory Board

Maria Zura Mohd. Zain

Chief Editor

Construction Research Institute of Malaysia
(CREAM)

Zuhairi Abd. Hamid, FASc., Ir, Dr.

Honorary Editorial Board

Consultant

Mustafa Alshawhi, Prof., Dr.

University of Salford, UK

Charles Egbu, Prof., Dr.

University of Salford, UK

C. S. Poon, Prof., Dr.

Hong Kong Polytechnic University, Hong Kong

George Ofori, Prof., Dr.

London South Bank University, UK

Vilas Nitivattananon, Dr., Prof.

Asian Institute of Technology (AIT), Thailand

Roslan Zainal Abidin, Prof., Dr.

Nilai University

Taksiah Abdul Majid, Prof., Dr.

Universiti Sains Malaysia (USM)

Joy Jacqueline Pereira, FASc., Prof., Dr.

Universiti Kebangsaan Malaysia (UKM)

Mohd. Saleh Jaafar, Prof., Dato', Ir, Dr.

Universiti Putra Malaysia (UPM)

Norwina Mohd. Nawawi, Datin, Prof., Ar., Dr.

International Islamic University Malaysia (IIUM)

Chan Toong Khuan, Ir, Dr.

University of Melbourne, Australia

Lee Yee Loon, Prof., Dr.

Ashmann Industries Sdn. Bhd.

Paridah Tahir, Prof., Dr.

Universiti Putra Malaysia (UPM)

Megat Azmi Megat Johari, Prof., Dr.

Universiti Sains Malaysia (USM)

Md. Abdul Mannan, Prof., Dr.

Universiti Malaysia Sarawak (UNIMAS)

Nasir Shafiq, Prof., Dr.

Universiti Teknologi PETRONAS (UTP)

Badorul Hisham Abu Bakar, Prof., Dr.

Universiti Sains Malaysia (USM)

Zulkifli Mohamed Udin, Assoc., Prof., Dr.

Universiti Utara Malaysia (UUM)

Abdul Rashid Abdul Aziz, Prof., Sr, Dr.

Universiti Sains Malaysia (USM)

Sobri Harun, Prof., Dr.

Universiti Teknologi Malaysia (UTM)

Hamimah Adnan, Prof., Datin, Sr, Dr.

Universiti Teknologi MARA (UiTM)

Abdul Karim Mirasa, Prof., Ir, Dr.

Universiti Malaysia Sabah (UMS)

Wan Hamidon Wan Badaruzzaman, Prof., Ir, Dr.

Universiti Kebangsaan Malaysia (UKM)

Hamidah Mohd. Saman, Prof., Dr.

Universiti Teknologi MARA (UiTM)

Mahyuddin Ramli, Prof., Dato', Ir, Dr.

Universiti Sains Malaysia (USM)

Hajah Faridah Hj. Ismail, Assoc., Prof., Sr, Dr.

Universiti Teknologi MARA (UiTM)

Mohd. Shahir Liew, Prof., Ir, Dr.

Universiti Teknologi PETRONAS (UTP)

Low Kaw Sai, Assoc., Prof., Ir, Dr.

Universiti Tunku Abdul Rahman (UTAR)

Padzil Fadzil Hassan, Prof., Dr.

Universiti Teknologi MARA (UiTM)

Low Sui Pheng, Prof., Dr.

National University of Singapore, Singapore

Sugiura, Kunitomo, Prof., Dr.

Kyoto University, Japan

Itaru Nishizaki, Dr.

Public Works Research Institute (PWRI), Japan

Zhangping You, Prof., Dr.

Michigan Technological University, USA

Norhayati Abdul Hamid, Prof., Dr.

Universiti Teknologi MARA (UiTM)

Dongping Fang, Prof., Dr.

Tsinghua University, China

Ibnu Syabri, Prof., Dr.
Institut Teknologi Bandung, Indonesia

Francis K.W. Wong, Prof., Dr.
Hong Kong Polytechnic University, Hong Kong

Kobayashi Kiyoshi, Prof., Dr.
Kyoto University, Japan

Aidah Jumahat, Assoc. Prof., Dr.
Universiti Teknologi MARA (UiTM)

Alsidqi Hasan, Assoc. Prof., Dr.
Universiti Malaysia Sarawak (UNIMAS)

Charles Bong Hin Joo, Assoc. Prof., Dr., Ir.
Universiti Malaysia Sarawak (UNIMAS)

Siti Norazniza Ahmad Sekak, Dr.
Universiti Teknologi MARA (UiTM)

Siti Suhana Judi, Dr., Sr
Universiti Teknologi MARA (UiTM)

Elsa Eka Putri, Dr.
Universitas Andalas, Indonesia

Chia Fah Choy, Assoc. Prof., Dr.
Universiti Tunku Abdul Rahman (UTAR)

Choong Kok Keong, Prof., Ir, Dr.
Universiti Sains Malaysia (USM)

Yuen Choon Wah, Ir, Dr.
University of Malaya (UM)

Osman Mohd Tahir, Assoc., Prof., LAr., Dr.
Universiti Putra Malaysia (UPM)

Ramadhansyah Putra Jaya, Assoc., Prof., Dr.
Universiti Malaysia Pahang (UMP)

Mohd Haziman Wan Ibrahim, Assoc., Prof., Dr.
Universiti Tun Hussien Onn Malaysia (UTHM)

Norwati Jamaluddin, Assoc., Prof., Dr.
Universiti Tun Hussien Onn Malaysia (UTHM)

Ahmad Hazim Abdul Rahim, Ir, Ts.
Construction Research Institute of Malaysia
(CREAM)

Rohana Hassan, Assoc., Prof., Dr.
Universiti Teknologi MARA (UiTM)

Norshariza Mohamad Bhkari, Dr.
Universiti Teknologi MARA (UiTM)

Lum Wei Chen, Dr.
Universiti Teknologi MARA (UiTM)

Amin Mojiri, Dr.
Hiroshima Universiti

Mohd Afiq Mohd Fauzi, Dr.
Universiti Teknologi MARA (UiTM)

Doh Shu Ing, Dr.
Universiti Malaysia Pahang (UMP)

Che Maznah Mat Isa, Assoc., Prof., Ir, Dr.
Universiti Teknologi MARA (UiTM)

Yeri Sutopo, Eng., Dr.
Universitas Negeri Semarang, Indonesia

Mohd Arif Marhani, Sr., Dr.
Universiti Teknologi MARA (UiTM)

Abdul Kadir Othman, Assoc., Prof., Dr.
Universiti Teknologi MARA (UiTM)

Rosaura Palma-Orozco, Dr.
Instituto Politecnico Nacional, Mexico

Abdelatif Hasinni, Dr.
University of Oran 2 Mohamed Ben Ahmed,
Algeria

Abdul Halim Abdul Ghani, Assoc., Prof., Ir, Dr.
Universiti Tun Hussien Onn Malaysia (UTHM)

Zainorizuan Mohd Jaini, Ir, Dr.
Universiti Tun Hussein Onn Malaysia (UTHM)

Norliyati Mohd Amin, Dr.
Universiti Teknologi MARA (UiTM)

Siti Akhtar Mahayuddin, Dr.
Universiti Teknologi MARA (UiTM)

Ali M. Alashwal, Dr.
Western Sydney University

Mohd Azizul Ladin, Dr.
Universiti Malaysia Sabah (UMS)

Nadia Kamaruddin, Dr.
Universiti Teknologi MARA (UiTM)

P. Suresh Kumar, Dr.
University College of Engineering Ariyalur, India

Sibilike K. Makhanu, Eng., Prof., Dr.
Oshwal College, Kenya

Maisarah Ali, Prof., Ir, Dr.
International Islamic University Malaysia (IIUM)

Siti Nurbaya Ab. Karim, Ir, Dr.
Universiti Teknologi MARA (UiTM)

Sheila Belayutham, Assoc., Prof., Dr.
Universiti Teknologi MARA (UiTM)

Kartika Negara, Dr.
Queensland University of Technology, Australia

Che Khairil Izam Che Ibrahim, Prof., Ir, Ts., Dr.
Universiti Teknologi MARA (UiTM)

Mahmud Kori Effendi, Dr.
Universitas Negeri Semarang, Indonesia

Lilawati Ab Wahab, Dr.
Universiti Teknologi MARA (UiTM)

Mohd Ezree Abdullah, Assoc., Prof., Dr.
Universiti Tun Hussein Onn Malaysia (UTHM)

Kamarudin Ambak, Assoc., Prof., Dr., Ts.
Universiti Tun Hussein Onn Malaysia (UTHM)

Ahmad Kamil Arshad, Prof., Ir, Dr.
Universiti Teknologi MARA (UiTM)

Ng Chee Khoon, Prof., Dr.
Universiti Malaysia Sarawak (UNIMAS)

Afzan Ahmad Zaini, Assoc., Prof., Dr.
Universiti Malaysia Sarawak (UNIMAS)

Nur Akmal Abdullah Goh, Prof., Ar.
Universiti Malaysia Sarawak (UNIMAS)

Sulaiman Abdul Malik, Dr.
Universiti Teknologi MARA (UiTM)

Mohd Khairolden Ghani, Ts., Ir, Dr.
Construction Research Institute of Malaysia
(CREAM)

Juang Akbardin, Dr.
Universitas Pendidikan Indonesia

Hafizah Latif, Dr.
Universiti Teknologi MARA (UiTM)

Wendi Boy Rasyid, Dr.
Diponegoro University, Indonesia

Abu Saleh Ahmed, Assoc., Prof., Dr.
Universiti Malaysia Sarawak (UNIMAS)

Nurul Sakina Mokhtar Azizi, Dr.
Universiti Sains Malaysia (USM)

Raudhah Ahmadi, Dr.
Universiti Malaysia Sarawak (UNIMAS)

Nor Suzila Lop, Sr, Dr.
Universiti Teknologi MARA (UiTM)

Zairra Mat Jusoh, Dr.
UCSI University

Zayn Al-Abideen Gregory, Dr.
Universiti Malaysia Sarawak (UNIMAS)

Mazlin Mokhtar, Prof., Dato', Dr.
Universiti Kebangsaan Malaysia (UKM)

Faridahanim Ahmad, Ts., Dr.
Universiti Teknologi Malaysia (UTM)

Fazly Amri Mohd, Dr.
Universiti Teknologi MARA (UiTM)

Natasha Dzulkalnine, Dr.
Universiti Teknologi MARA (UiTM)

Raja Rafidah Raja Muhammad Rooshdi, Dr.
Universiti Teknologi MARA (UiTM)

Mohd Zairul Mohd Noor, Assoc. Prof., Ts., Dr.
Universiti Putra Malaysia (UPM)

Mysarah Maisham, Mrs.
Universiti Teknologi MARA (UiTM)

Alamah Misni, Ts., Dr.
Universiti Teknologi MARA (UiTM)

Mohamed Zuhaili Mohamed Najib, Dr.
Universiti Teknologi Malaysia (UTM)

Anis Rosniza Nizam Akbar, Dr.
Universiti Teknologi MARA (UiTM)

Abdul Hadi Nawawi, Prof., Sr, Ts., Dr.
Universiti Teknologi MARA (UiTM)

Zarita Ahmad @ Baharum, Dr.
Universiti Teknologi MARA (UiTM)

Yuhainis Abdul Talib, Assoc., Prof., Sr, Dr.
Universiti Teknologi MARA (UiTM)

Shazwan Mohamed Shaari, Dr.
Universiti Malaysia Sarawak (UNIMAS)

Siti Hasniza Rosman, Sr, Dr.
Universiti Teknologi MARA (UiTM)

Ahmad Shazrin Mohamed Azmi, Sr, Dr.
Universiti Teknologi MARA (UiTM)

Mustaqqim Abdul Rahim, Ir, Dr.
Universiti Malaysia Perlis (UNIMAP)

Nurul Nadiah Zainol, Dr.
Universiti Teknologi MARA (UiTM)

Don Samarasinghe, Dr.
Massey University, Auckland, New Zealand

Saipol Bari Abd Karim, Assoc., Prof., Sr, Dr.
Universiti Malaya (UM)

Khariuddin Sanaullah, Assoc., Prof., Dr.
Universiti Malaysia Sarawak (UNIMAS)

Shamsulh Bandi, Dr.
Universiti Teknologi MARA (UiTM)

Tun Mohd Irfan Mohd Suria Affandi, Dr.
Universiti Teknologi MARA (UiTM)

Nor Hazirah Hasri, Ms.
Universiti Teknologi MARA (UiTM)

Mohd Ridhwan Adam, Dr.
Univesiti Sains Malaysia (USM)

Azida Hj Rashidi, Dr.
Universiti Malaysia Sarawak (UNIMAS)

Aziz Rahman, Dr.
Universiti Teknologi MARA (UiTM)

Mastura Jaafar, Prof., Sr, Dr.
Universiti Sains Malaysia (USM)

Zul Zakiyudin Ahmad Rashid, Dr.
Universiti Sains Malaysia (USM)

Nadzirah Zainordin, Ts., Sr, Dr.
UCSI University

Noor Akmal Adillah Ismail, Dr.
Universiti Teknologi MARA (UiTM)

Har Einur Azrin, Assoc., Prof., Dr.
Universiti Teknologi MARA (UiTM)

Julaihi Wahid, Prof., Ar., Dr.
Universiti Malaysia Sarawak (UNIMAS)

Marlyana Azyyati Marzukhi, TPr, Dr.
Universiti Teknologi MARA (UiTM)

Anis Rosniza Nizam Akbar, Dr.
Universiti Teknologi MARA (UiTM)

Mohd Azwarie Mat Dzahir, Dr.
Universiti Teknologi Malaysia (UTM)

Nurul Afiqah Azmi, Dr.
Universiti Teknologi MARA (UiTM)

Idawati Ismail, Dr.
Universiti Malaysia Sarawak (UNIMAS)

Nor Mayuze Mohamad, Dr.
Universiti Teknologi MARA (UiTM)

Siti Nur Aishah Mohd Noor, Dr.
Universiti Teknologi MARA (UiTM)

Darrien Mah Yau Seng, Ir, Assoc., Prof., Dr.
Universiti Malaysia Sarawak (UNIMAS)

Norfashiha Hashim, Ts., Dr.
Universiti Teknologi MARA (UiTM)

Nurazuwa Md Noor, Dr.
Universiti Tun Hussein Onn Malaysia (UTHM)

Nor Hasanah Abdul Shukor Lim, Dr.
Universiti Teknologi Malaysia (UTM)

Rahmita Sari Rafdinal, Dr.
PS. Mitsubishi Construction, Japan

Nor Akalili Ahmad, Dr.
Universiti Teknologi Malaysia (UTM)

Suliahti Hashim, Dr.
Universiti Teknologi MARA (UiTM)

Rendy Thamrin, Prof., Dr., Eng.
Universitas Andalas, Indonesia

Norsalisma Ismail, Dr.
Universiti Teknologi MARA (UiTM)

Siti Farhanah S.M Johan, Dr.
MTS Fibromat (M) Sdn. Bhd.

Kelvin Kuok King Kuok, Ir, Ts., Dr.
Swinburne University of Technology, Sarawak
Campus

Nur Aini Mohd Arish, Dr.
Universiti Tun Hussein Onn Malaysia (UTHM)

Adiza Jamadin, Ts., Dr.
Universiti Teknologi MARA (UiTM)

Hasnida Harun, Dr.
Universiti Tun Hussein Onn Malaysia (UTHM)

Amir Detho, Dr.
Quaid-e-Awam University of Engineering,
Pakistan

Nor Hazren Abdul Hamid, Dr.
Universiti Tun Hussein Onn Malaysia (UTHM)

Inawati Othman, Dr.
Universiti Malaysia Sarawak (UNIMAS)

Noor Hasyimah Rosman, Dr.
Universiti Kebangsaan Malaysia (UKM)

Nahla Naji Hilal, Asst. Prof., Dr.
University of Anbar, Iraq

Nur Farhayu Ariffin, Ts., Dr.
Universiti Malaysia Pahang (UMP)

Nor Diyana Mustapa, Dr.
Universiti Malaysia Kelantan (UMK)

Ramu Velusamy, Dr.
Politeknik Sultan Idris Shah

Mohd Reza Azmi, Dr.
Universiti Kebangsaan Malaysia (UKM)

Izwan Johari, Ts., Ir, Dr.
Univesiti Sains Malaysia (USM)

Sharifah Akmam Syed Zakaria, Assoc. Prof., Dr.
Univesiti Sains Malaysia (USM)

Mohd Nasrun Mohd Nawi, Prof., Dr. Sr
Universiti Utara Malaysia (UUM)

Nurulhuda Hashim, Mrs.
Taylor's University

Loo Seong King, Sr.
Taylor's University

Mieranie Watie, Sr.
Tunku Abdul Rahman University of Management
and Technology

Saeed Balubaid, Dr.
Hadhramout University, Yaman

Faraziera Mohd. Raslim, Dr.
Universiti Sains Malaysia (USM)

Shirley Chin Ai Ling, Sr.
Taylor's University

Chitra Weddikkara, Prof.
The Colombo School of Construction Technology

Hamizah Liyana Tajul Ariffin, Dr.
Universiti Teknologi Malaysia (UTM)

Azrina Md Yaakob, Sr.
Taylor's University

Norhazren Izatie Mohd, Dr.
Universiti Teknologi Malaysia (UTM)

Muizz Oladapo Sannianibire, Dr.
King Fahd University of Petroleum and Minerals,
Saudi Arabia

Kan Fock Kui, Dr.
University College of Technology Sarawak
(UCTS)

Shahiron Shahidan, Dr., Ts., Ir, Prof., Eur Ing.
Universiti Tun Hussein Onn Malaysia (UTHM)

Nurul Zahirah Mokhtar Azizi, Dr.
Northumbria University, UK

Julian Osman, Dr.
International Islamic University Malaysia (IIUM)

**Ahmed Mohammed Kamarudden, Dr.,
Assoc., Prof.**
Skyline University College, United Arab Emirates

Lilawati Ab Wahab, Dr.
Universiti Teknologi MARA (UiTM)

Mairizal, Dr.-Eng., Ir.
Universitas Pamulang, Indonesia

Muhammad Faez Mustaqim, Dr.
Universiti Malaysia Sarawak (UNIMAS)

Sukmawati Ismail, Mdm.
Politeknik Kota Bharu

Grace K C Ding, Assoc., Prof., Dr.
University of Technology Sydney, Australia

Jibrin Hassan Suleiman, Dr.
Federal College of Education (Technical) Gombe,
Nigeria

Leong Boon Tik, Mr.
Taylor's University

Nurmunira Muhammad, Ts., Dr.
Universiti Malaysia Pahang Al-Sultan Abdullah

Nadzirah Mohd Mokhtar, Assoc., Prof., Dr.
Universiti Malaysia Pahang Al-Sultan Abdullah

Rahimi A. Rahman, Assoc., Prof., Dr.
Universiti Malaysia Pahang Al-Sultan Abdullah

Roziah Zailan, Dr.
Universiti Malaysia Pahang Al-Sultan Abdullah

Saznizam Sazmee Sinoh, Gs., Ts., Dr.
Universiti Malaya (UM)

Faten Ahmad Albroush, Dr.
Jadara University, Jordan

Mazen M. Omer, Mr.
Universiti Malaysia Pahang Al-Sultan Abdullah

Roziah Zailan, Ts., Dr.
Universiti Malaysia Pahang Al-Sultan Abdullah

Lim Kar Sing, Dr.
Universiti Malaysia Pahang Al-Sultan Abdullah

Nur Fahriza Mohd Ali, Dr.
Universiti Malaysia Pahang Al-Sultan Abdullah

Malik Mansoor Ali Khalfan, Assoc., Prof., Dr.
Management Science and Engineering
Khalifa University, Abu Dhabi, UAE

Secretariat

Nurulhuda Mat Kilau, Mrs.
Construction Research Institute of Malaysia
(CREAM)

Tengku Mohd Hafizi Raja Ahmad, Mr.
Construction Research Institute of Malaysia
(CREAM)

Editorial

Welcome from the Editors

Welcome to the forty-sixth (46th) issue of Malaysian Construction Research Journal (MCRJ). In this issue, we are pleased to include eight papers that cover a wide range of research areas in the construction industry. The editorial team would like to express our sincere gratitude to all contributing authors and reviewers for their contributions, continuous support and comments.

In this issue:

Nasfiza Mokhtar et al. explored the application of the Bamboo-Geotextile Buoyant System (GEOBAMTILE) as an innovative ground improvement solution, specifically for road embankment reinforcement in areas with soft soil. A key aspect of this research was the integration of fibre optic sensing (FOS) technology, which played a critical role in providing real-time, continuous monitoring of strain and stress distributions within the GEOBAMTILE system. FOS technology allowed for precise tracking of changes in structural performance, revealing that the bamboo geotextile reinforcement significantly mitigated both overall and differential settlement. The results indicated that the GEOBAMTILE system effectively distributed loads, reducing stress on the underlying soft soils and minimising the risk of differential and large settlement. The FOS technology also revealed critical strain and stress areas, particularly at road shoulders, where critical readings were observed, suggesting additional improvements to the GEOBAMTILE system. By leveraging the advantages of FOS, such as immunity to electromagnetic interference, lightweight sensors, and the ability to monitor numerous points over large areas, this study not only enhanced the durability of road infrastructure but also aligned with sustainable engineering practices by utilising renewable materials. The findings highlight the potential of bamboo geotextile systems in infrastructure projects, demonstrating that the incorporation of advanced monitoring technologies, such as FOS, can pave the way for more resilient and environmentally friendly road construction methodologies.

Jahanzeb Asim and Muneera Esa analysed the adoption of Agile methods within Pakistan's construction industry and their anticipated impact on enhancing project flexibility, participation by various stakeholders, and overall efficiency. The research examines the consequences of conventional project management approaches, such as inflexible workflows, procrastination, and unaligned stakeholders, using Scrum and Kanban Agile frameworks, as well as Lean Construction, and its ability to mitigate these problems. This research identified several key barriers to Agile adoption, including resistance to change, regulatory constraints, and budget cuts, through qualitative interviews with industry professionals. The results propose solutions such as phased implementation, Agile training, and hybrid models of Agile. The study contributes to what the authors refer to as a "broader discourse on Agile in developing economies" by providing a strategic roadmap for implementing Agile in Pakistan's construction industry, aiming to enhance project success and adaptability.

Shalini Sanmargaraja et al. investigated sustainable design criteria for green office buildings. Cities serve as home to over 50% of the global population and are crucial to many of a nation's major economic endeavours. Significant rises in carbon dioxide emissions

resulting from human activity have made the discrepancy between actual emissions and the target of reducing global warming even more pronounced. Office buildings are a significant contributor to climate change; in response, there is an increasing demand for green office buildings. Therefore, this paper aims to report a study that explores the key sustainable design concepts that are incorporated into the design stage of green office building projects. One hundred forty-three construction stakeholders responded to the questionnaires, which served as the data collection method. From the data analysis, it was found that energy efficiency is the fundamental design criterion used in designing green office buildings, followed by the integration of renewable energy, the use of sustainable materials, waste conservation, improvement of indoor air quality, waste reduction, and biodiversity enhancement. All parties involved in the construction process need to work together to achieve the primary goals of green buildings, which are reducing energy use, minimising greenhouse gas emissions, and protecting biodiversity and ecosystems. Much empirical research is needed to identify the obstacles that building owners must overcome to make their buildings sustainable, to highlight the significance of lowering carbon footprints for Malaysia to become a low-carbon city by 2030.

Maria Achieng Akulu et al. conducted a study on the adoption of Artificial Intelligence (AI) in the construction industries of Zambia and Kenya. Using a quantitative research approach, they gathered survey data from industry professionals, employing statistical analysis to evaluate awareness and implementation levels of AI. The findings indicated a high awareness of AI; however, its actual adoption was limited, primarily occurring during the design and planning phases, where specific tools were utilised. More advanced AI applications were found to be underutilised, and there were no significant differences in adoption rates between Zambia and Kenya. The study concluded that targeted interventions, including policy support, capacity building, and investment incentives, are essential for enhancing the integration of AI. By increasing both awareness and accessibility to AI technologies, there is significant potential for improved efficiency, productivity, and innovation in the construction sectors of both countries.

Nadzirah Zainordin et al. exploring in the dynamic realm of construction, the Industrialized Building System (IBS) stands out as a transformative approach, promising a multitude of benefits. This study embarks on a journey to unravel the benefits through a systematic literature review. By synthesizing an extensive array of scholarly works, this research aims to shed light on the range of benefits that IBS implementation brings to the construction industry. The systematic review methodology ensures a rigorous and unbiased exploration, encompassing factors such as cost and finance, sustainability, environmental, safety, social benefit, labor reduction, and construction site. Furthermore, this study delves into the challenges and facilitators associated with IBS adoption, offering a holistic understanding of the intricacies involved. The findings not only underline the significant advantages that IBS presents but also provide invaluable insights for industry practitioners, policymakers, and researchers striving to navigate the terrain of modern construction practices. As the construction industry seeks innovative solutions for sustainable and efficient building, this study's revelations contribute to the ongoing dialogue, fostering awareness and informed decision-making around the potential perks of integrating Industrialized Building Systems.

Sui Lai Khoo et al. have aimed to integrate the digitalisation in the construction industry with a key driver of sustainability, enabling more efficient resource management, and reducing

environmental impact. Quantity Surveyors (QS) play a crucial role in ensuring that digital advancements align with sustainable construction practices, particularly in cost management and project efficiency. This study explores the synergy between digitalisation and sustainability from the perspective of Malaysian QS professionals, highlighting the impact, challenges, and opportunities of adopting digital tools in sustainable construction. The research aims to examine how digital technologies such as Building Information Modelling (BIM), Artificial Intelligence (AI), and blockchain contribute to sustainability, identify the barriers faced by QS professionals in implementing digital solutions, and provide insights into their role in promoting cost efficiency and waste reduction. Findings indicate that while digitalisation enhances sustainability by improving cost forecasting, resource optimisation, and environmental performance, challenges such as high implementation costs, skill gaps, and resistance to change hinder widespread adoption. The study concludes that industry-wide training programs, policy incentives, and collaborative initiatives are essential to support QS professionals in leveraging digitalisation for sustainability. These insights provide valuable implications for policymakers, industry stakeholders, and QS practitioners in driving Malaysia's construction industry towards a more sustainable and digitally integrated future.

Jannatun Naemah Ismam et al. aims to propose a conceptual framework of project managers' competencies toward safety performance in green construction. It highlights recent studies that link higher competency levels with improved safety outcomes and emphasizes the significance of project managers' competence in influencing safety performance within this context. The three (3) competency attributes were developed based on the existing Crawford Integrated Model of Competence, while the five (5) safety performance components were identified using the Preferred Reporting Items for Systematic Reviews and Meta-Analyses (PRISMA) approach. The findings reveal three key competency attributes that project managers should possess to achieve safe and sustainable construction practices. These attributes are known as Knowledge, Skills, and Attitudes. Furthermore, five safety performance components were identified, outlining the essential dimensions of safety performance in green construction.

Nur Azrin Ahmad Pakrudin et al. investigates the Critical Success Factors (CSFs) influencing Facilities Management (FM) implementation in the healthcare sector through Interpretive Structural Modelling (ISM) and MICMAC analysis. Fifteen CSFs, identified from prior literature, were evaluated by thirteen FM experts to determine their interrelationships and hierarchical influence. The ISM approach revealed six hierarchical levels, with Knowledge and Competencies and Top Management Commitment and Support serving as foundational drivers. Teamwork Effectiveness, Contract Management, Strategic Decision-Making, Resources and Training, and Customer Focus emerged as key enablers for successful implementation. Strategic Planning and Work Environment were identified as linkage factors connecting the drivers to dependent factors such as Risk Management, Performance Measurement, and Accreditation. The resulting ISM-based model provides a structured framework for prioritizing initiatives to enhance FM implementation effectiveness in healthcare. The study underscores the significance of leadership commitment, knowledge capability, and collaborative culture in driving FM performance, while also offering a transferable model for application across other facility sectors.

SUSTAINABLE GROUND IMPROVEMENT USING BAMBOO-GEOTEXTILE REINFORCEMENT AND REAL-TIME MONITORING WITH FIBER OPTIC TECHNOLOGY

Nasfiza Mokhtar^{1,2}, Adnan Zainorabidin^{1,2}, Kasbi Basri³, Bun Pin Tee⁴, Low Kaw Sai⁵, and Sher Ern Chong⁵

¹Faculty of Civil Engineering and Built Environment, Universiti Tun Hussein Onn Malaysia, Johor, Malaysia

²Research Centre for Soft Soil (RECESS), Institute for Integrated Engineering, Universiti Tun Hussein Onn Malaysia, Johor, Malaysia

³Department of Geotechnics and Transportation, Faculty of Civil Engineering, Universiti Teknologi Malaysia, Johor, Malaysia

⁴Non-affiliated, Selangor, Malaysia

⁵Advanced Clarity Hectares Sdn. Bhd., Kuala Lumpur, Malaysia

Abstract

Infrastructure projects such as roads, highways, and railways are vital for economic development, but constructing on soft soils, like soft clay or peat, poses significant challenges due to settlement and stability issues. This study explores the application of the Bamboo-Geotextile Buoyant System (GEOBAMTILE) as an innovative ground improvement solution, specifically for road embankment reinforcement in soft soil areas. The research was conducted on a full-scale road construction project in Tanjung Karang, Selangor, where bamboo-geotextile layers were installed beneath the embankment to distribute loads and minimise differential settlement. A comprehensive long-term monitoring program was implemented using fibre optic sensing (FOS) technology, including Fibre Bragg Grating (FBG) sensors and Brillouin Optical Time Domain Analysis (BOTDA) for real-time data acquisition. Results indicated that the GEOBAMTILE system significantly reduced both overall and differential settlement by effectively distributing the stress. The FOS technology revealed that critical strain and stress readings were observed on the road shoulders, where higher traffic loads were concentrated. Overall, the combination of bamboo reinforcement and fibre optic monitoring provides a sustainable and efficient approach to enhancing the performance of road infrastructure on soft ground.

Keywords: *Fiber Optic Sensing; BOTDA; Fiber Bragg Grating; Soft Clay; Bamboo-geotextile*

INTRODUCTION

Infrastructure such as roads, highways, and railways are essential for a country's economy, as they facilitate the smooth movement of goods, services, and people. A strong transportation network reduces travel time, lowers costs, and improves connections between cities and rural areas, thereby supporting trade, tourism, and industry. The safety and reliability of these networks are critical for economic stability, as disruptions can lead to delays and increased expenses (Nikolaeva, 2020). Road construction on very soft ground, such as soft clay or peat, is often avoided due to the challenges and limited engineering solutions available to address the problems related to soil characteristics (Basri et al., 2021; Basri et al., 2020; Zainorabidin et al., 2023). However, road alignment cannot always be adjusted to avoid passing through soft soil areas, which necessitates proper solutions or ground improvement before construction can begin. In recent years, several studies have been conducted to predict and understand soil behaviour, especially using bamboo reinforcement or systems in road construction. The investigation includes laboratory-scale studies (Basri et

al., 2018; Wahab et al., 2021), small-scale studies (Asaduzzaman & Islam, 2014; Hegde & Sitharam, 2015; Pinka et al., 2021; Saha & Mandal, 2020; Waruwu et al., 2019), modelling efforts, and even full-scale tests (Deb et al., 2021; Mamatha & Kommu, 2016; Marto et al., 2010; Rahardjo, 2005). These investigations have provided deeper insights into soil behaviour related to road construction on soft soil.

Traditionally, ground monitoring has been conducted using mechanical and electrical sensors, which measure parameters such as displacement and load, transmitting data as electrical signals. While these methods are reliable, they have limitations, including a restricted number of sensing points and susceptibility to environmental interference from nearby construction machinery (Bednarski et al., 2021; Puzrin et al., 2020). Moreover, manually-read sensors require personnel to work in potentially hazardous conditions, and these systems often lack the capability to provide real-time data (Sharon, 2020). Several challenges were encountered during the investigations, including localised readings, broken equipment that caused inaccurate readings, high costs, and a limited number of readings (Sharon, 2020). Without effective geotechnical monitoring, unexpected ground movement or failure may lead to serious issues, including structural damage, road closures, and financial losses. Excessive settlement or embankment failures can result in cracked road surfaces, posing significant safety hazards.

Thus, this study was conducted on a full-scale ground improvement project using GEOBAMTILE, which applied fibre optic technology as an alternative for continuous monitoring. In recent years, FOS has emerged as a superior alternative for ground monitoring, including applications such as GEOBAMTILE. FOS offers several advantages: immunity to electromagnetic and radio frequency interference (Chai et al., 2019), intrinsic safety due to the absence of electrical components, lightweight and compact sensors, real-time automated data acquisition (Pendão & Silva, 2022; Puzrin et al., 2020), and the ability to monitor numerous sensing points over large areas (Ip et al., 2022; Zhang et al., 2020). FOS has been successfully implemented in civil engineering applications such as tunnels, bridges, and embankments, enabling distributed measurements of strain, temperature, and deformation with high spatial resolution (Wijaya et al., 2021).

In combination with the sustainable GEOBAMTILE system, these techniques are particularly effective for enhancing soil stabilisation, drainage, and embankment reinforcement in road construction projects. Thus, incorporating fibre optic sensing along with ground improvement techniques such as GEOBAMTILE provides a sustainable, real-time, and safer approach for monitoring road construction projects, ultimately improving the durability and safety of road infrastructure. This study aims to investigate potential alternatives for continuous monitoring of the GEOBAMTILE system in terms of the structural performance of bamboo within the system, monitor horizontal and longitudinal differential settlement along the road, and observe land subsidence and the influence of depth beneath the GEOBAMTILE system. This comprehensive instrumentation and monitoring plan will enable a detailed evaluation of the system's structural performance and its impact on the surrounding environment.

MATERIALS AND METHODS

Study Location

The study was conducted at Federal Route Trunk 05 (FR05) in Tanjung Karang, Selangor, located at GPS coordinates 3°30'54.1"N, 101°05'45.8"E. Situated on the west coast of Selangor, this road improvement project encompasses parts of the existing roadway which begins at Kg Tengah, approximately 5 km north of Tanjung Karang town, and extends for about 45 km, concluding roughly 2 km before reaching Sabak Bernam town (refer to Figure 1). The project is strategically located alongside built-up areas, ensuring that the upgraded roadway effectively meets the needs of both local traffic and broader connectivity along the West Coast Expressways. A preliminary investigation revealed that the depth of soft clay reach reached up to 20 meters. Therefore, the GEOBAMTILE was installed as a means to distribute the load applied from the road embankment and traffic, thus minimising the imposed stress on the underlain soft subgrade, which results in a significant reduction of differential and total settlement. Long-term monitoring was conducted to investigate the efficiency of the GEOBAMTILE system. Instrumentations were deployed using FBG sensors and BOTDA technology. The primary focus is to monitor the structural integrity of the bamboo in the GEOBAMTILE system, measure horizontal and longitudinal differential settlement along the road, and evaluate land subsidence and influence depth below the system.

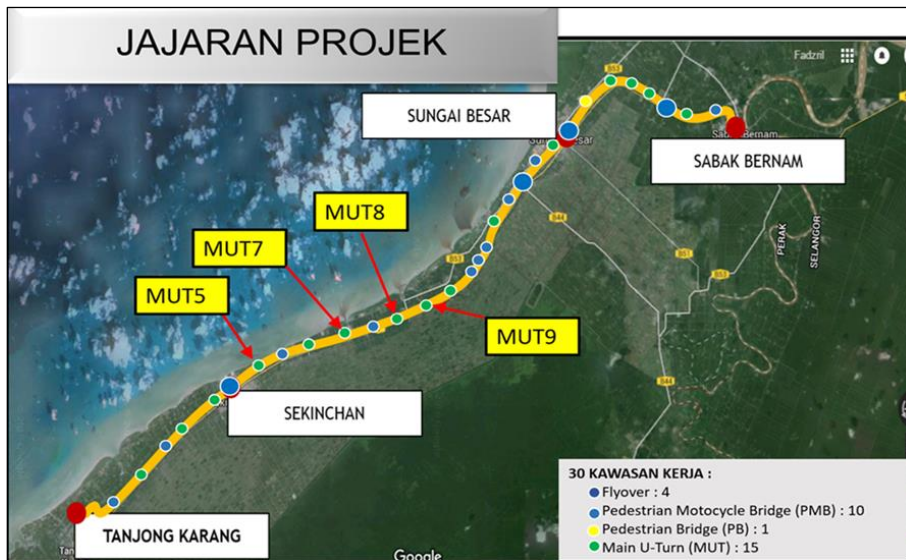


Figure 1. Sample Location of U-Turn 5 at Tanjung Karang–Sabak Bernam Upgrading Project

As-Built Instrumentation Setup

The FBG system is used to monitor the load transfer and groundwater pressure below the GEOBAMTILE system, utilising FBG Earth pressure cells and piezometers. These sensors were installed in boreholes and connected to an FBG interrogator, which is used to store and analyse dynamic and static measurements. BOTDA technology is used to monitor strain in the bamboo structure, differential settlement, and vertical land subsidence. Two types of optical cables were utilised, with fibre strain cable (FSC) cables for horizontal strain

monitoring on the bamboo and soft strain cable (SSC) cables for vertical land subsidence monitoring. Strain measurements were compared with baseline readings and subsequent data was analysed to determine the strain change and estimate the settlement behaviour. The readings were obtained at intervals of approximately three months to assess the performance and settlement behaviour of the GEOBAMTILE system over time. Figure 2 illustrates the overall methodology flowchart of the study. Figures 3, 4 and 5 show the distributed fibre optic strain sensing cable, the plan view of the top layer of GEOBAMTILE, the plan view of the bottom layer of GEOBAMTILE and the cross-section view, respectively. The figures illustrate the as-built instrumentation setup for the purpose of continuous monitoring of the GEOBAMTILE system.

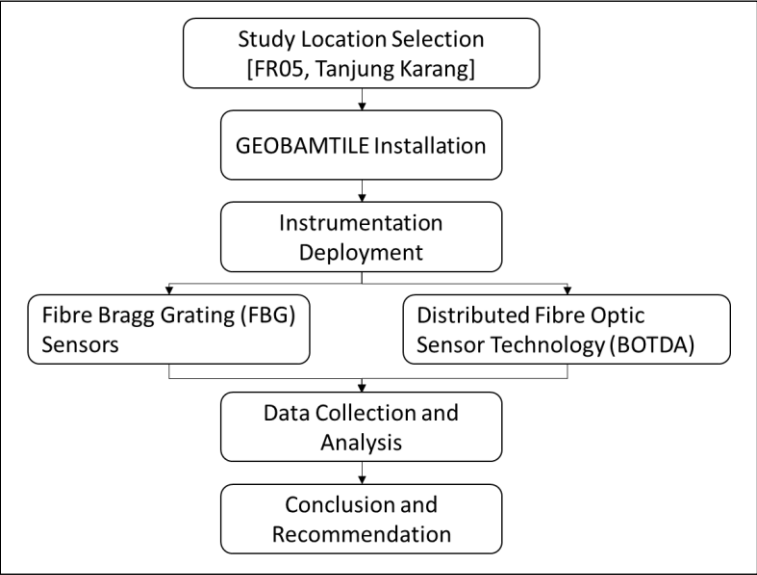


Figure 2. Methodology Flowchart for Assessing GEOBAMTILE

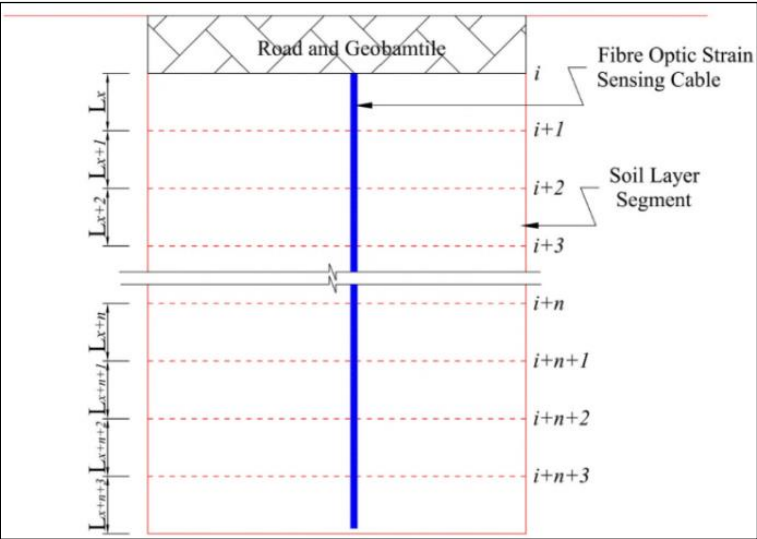


Figure 3. Distributed Fibre Optic Strain Sensing Cable in The Soil Layer Segment

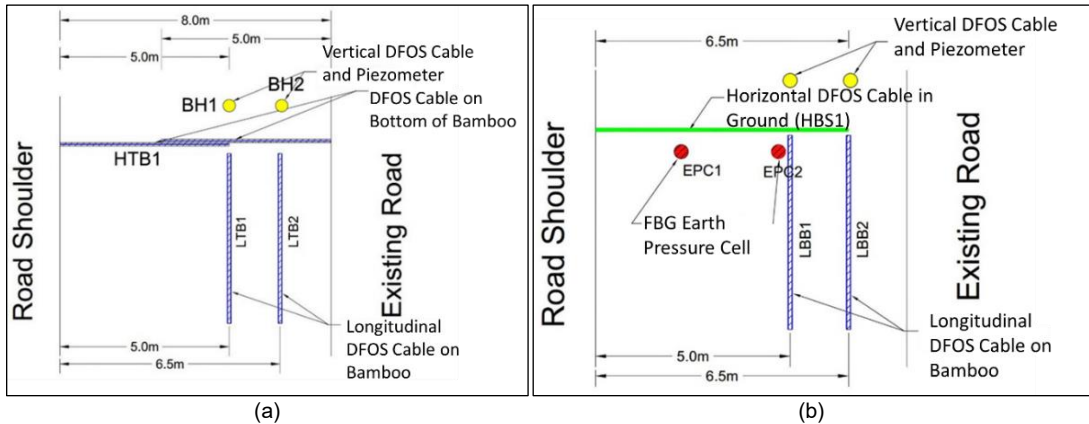


Figure 4. Plan View of Instrumentation (a) at The Top Layer of The GEOBAMTILE; (b) at The Bottom Layer of The GEOBAMTILE

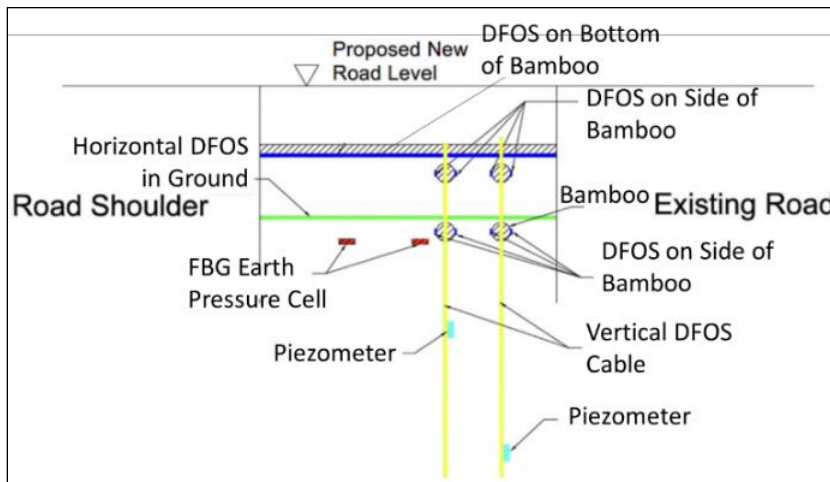


Figure 5. Cross-Section View of Instrumentation at GEOBAMTILE System Across The Road

RESULTS AND DISCUSSION

Strain Reading

Figure 6 shows that in the first meter of the longitudinal top layer 1 (LTB1) fibre optic, a slight variation in strain was observed. During the construction phase (from Day 0 to Day 119), the road exhibited elongation, which is consistent with findings by Glisic and Inaudi (Glisic & Inaudi, 2007), who highlighted that elongation is often associated with the redistribution of loads and soil compaction during construction. However, after opening to traffic (from Day 208 to Day 860), the road experienced shortening, a phenomenon that corresponds to the settlement caused by repeated traffic loads and dynamic stress (Lin, 2019). From 2 to 5 meters, strain readings fluctuated, with peaks and troughs indicating periods of significant elongation or shortening. The strain values ranged from -450 to $450 \mu\epsilon$, indicating that overall, the road predominantly experienced elongation throughout the monitoring period.

Figure 7 illustrates the strain readings for LTB2, showing a similar pattern throughout the monitoring period. The road primarily experienced elongation, with strain decreasing as the length increased. During the construction period (from Day 0 to Day 14), the strain was higher compared to after the road was opened to traffic (from Day 195 to Day 860). This behaviour is likely due to a reduction in stress distribution to the bamboo as the soil layer densified over time. As mentioned by Lin et al. (Lin, 2019), densification and soil layers significantly reduce strain amplitudes, especially in systems designed for load distribution. The strain ranged from -20 to 410 $\mu\epsilon$.

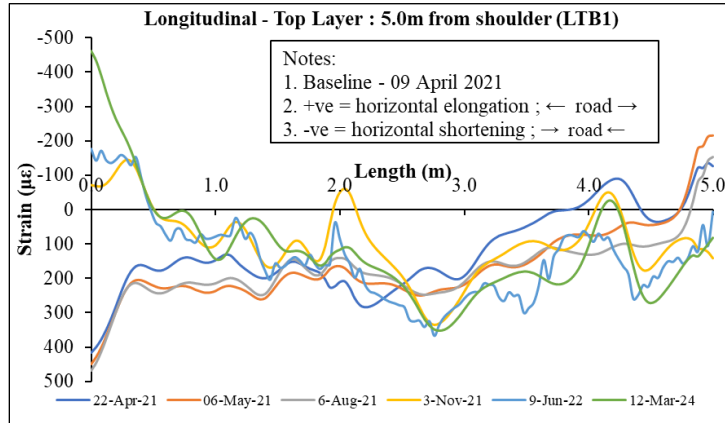


Figure 6. Strain Against Length for LTB1

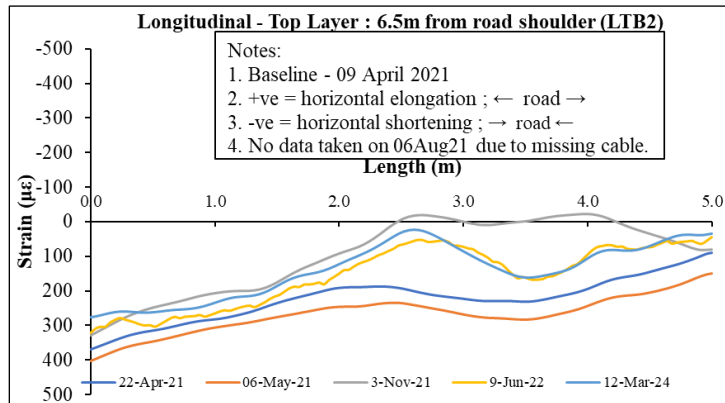


Figure 7. Strain Against Length for LTB2

A significant increase in strain was observed on the first 1 meter upon contact and stabilised throughout the remaining length, suggesting the critical strain reading was on the first 1 meter. This finding was due to the pronounced localised stress concentrations at the contact points in the reinforced systems (Glisic & Inaudi, 2007). From the strain measurement, it can also be observed that the strain decreases over length due to the dissipation of stress governed by the buoyancy effect. Comparison between LTB1 and LTB2 suggests that an area that doesn't come directly in contact with the tyres from the passing traffic shows minimum variations in strain readings, which could be attributed to the ability of the system to distribute the load. As mentioned by Wu et al. (2020), geosynthetic reinforcements can effectively minimise localised stresses and provide uniform load transfer across the system.

The strain readings for the horizontal top layer (HTB1), shown in Figure 8, ranged from -1500 to 1500 $\mu\epsilon$, displaying fluctuations throughout the monitoring period. These variations indicate significant elongation and shortening at different points along the road, mainly influenced by pressure distribution across the fibre optic's position. As load was applied to the bamboo layer, tensile forces caused elongation, while compressive forces led to shortening. This dual behaviour suggests that the bamboo layer experienced both elongation and compression, indicating potential heaving rather than just settling over time. Cyclic loading from traffic could induce alternating tensile and compressive strains in geosynthetic reinforcements, highlighting the dynamic nature of stress distribution (Wu, 2020). Moreover, local variations in load application, such as wheel paths and near the shoulder, could amplify strain fluctuations, contributing to the observed patterns of elongation and compression (Lin, 2019).

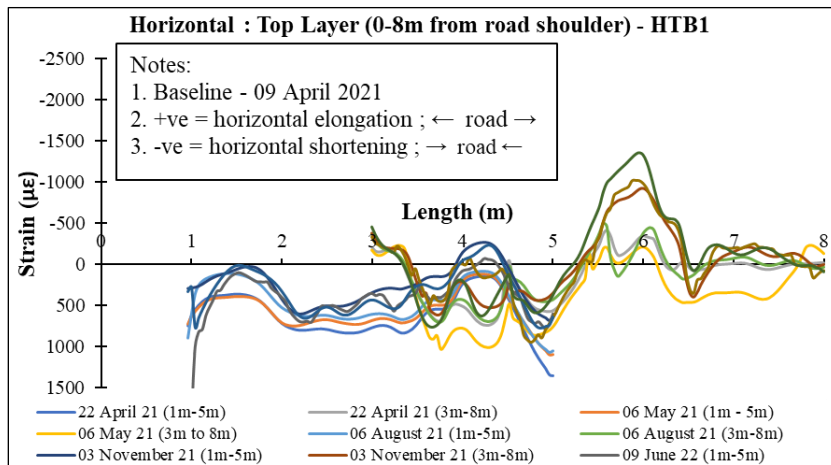


Figure 8. Strain Against Length for HTB1

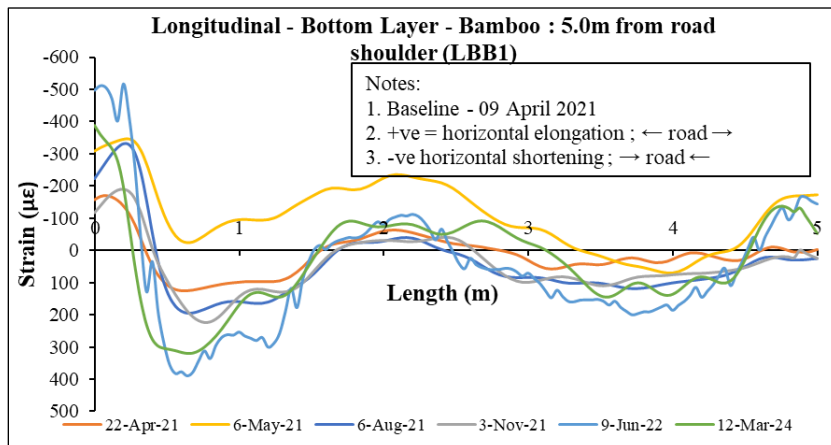


Figure 9. Strain Against Length for LBB1

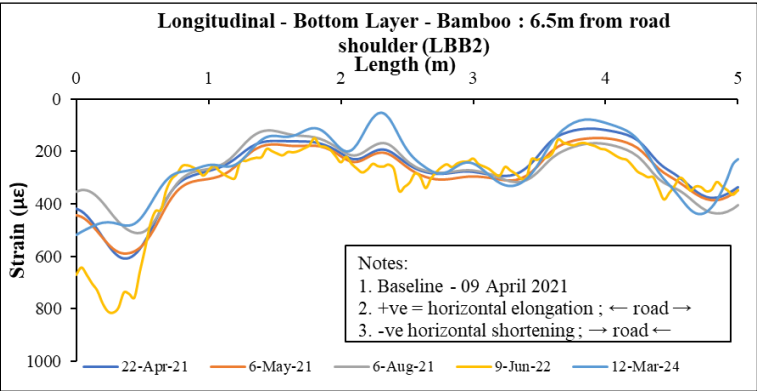


Figure 10. Strain Against Length for LBB2

The strain readings for the bottom layer, represented by longitudinal bottom layer 1 (LBB1) and LBB2, are shown in Figures 9 and 10, respectively. Similar to the top layer, LBB1 exhibited a significant increase of strain on the first 1 meter before fluctuating and stabilising throughout the monitoring period, with notable peaks and troughs indicating significant elongation and shortening at different points between 2 to 5 meters. This behaviour is consistent with findings by Wu et al. (2020), who reported that reinforcement layers often experience localised stress concentrations at their edges, leading to higher strain variability. However, LBB2 only experienced elongation during the same period compared to LBB1, which suffered both elongation and shortening. The strain measurements ranged from -500 to 400 $\mu\epsilon$ for LBB1 and from 20 to 810 $\mu\epsilon$ for LBB2.

A single fibre optic was installed to monitor soil strain beneath the bamboo layer horizontally, as shown in Figure 11 for the horizontal bottom layer (HBS1). The soil at the bottom of the bamboo layer experienced a strain of up to 3200 $\mu\epsilon$, which is 2 to 3 times higher than the strain observed in the top bamboo layer. This higher strain is attributed to the combined stresses from vehicles, the bamboo layer, and the pavement above. Moreover, the behaviour could be due to the position of the fibre, which maximises contact with the passing vehicles.


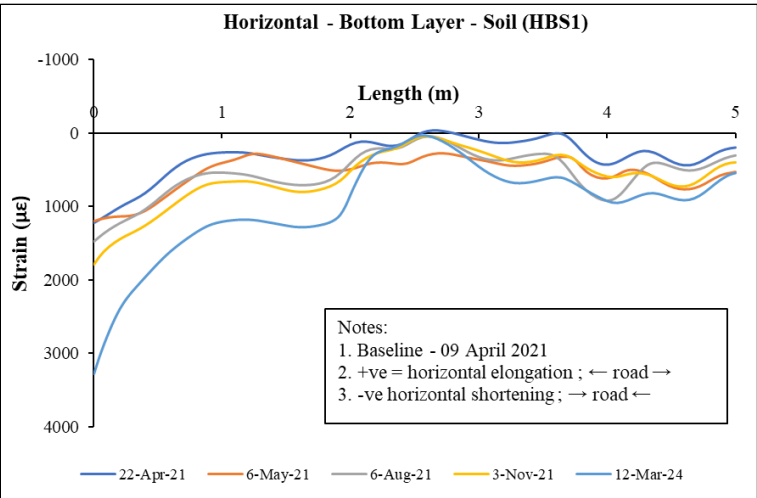


Figure 11. Strain Against Length for HBS1

The strain distribution observed also suggests that higher strain was recorded near the shoulder compared to the middle road. The behaviour could be governed by the heavier vehicles that typically use the left lane, which is near the shoulder, compared to the right lane, which is usually used by the smaller and faster vehicles. This finding suggests that extra attention should be given to the GEOBAMTILE design, especially on the left lane and parts of the road shoulder. As mentioned by Lin et al. (2019), the traffic loads generate dynamic stress up to 2 meters beyond the roadway. Overall, this observation validates the capability of fibre optic sensors to capture dynamic strain changes accurately and in superior resolution compared to conventional methods in monitoring infrastructure performance (Wu, 2020).

Settlement

Settlement measurements were taken from two boreholes, BH1 and BH2, as shown in Figure 12. In BH1, the peak settlement increased significantly from -0.45 mm to -0.97 mm during the early phase of GEOBAMTILE construction (Day 0 to Day 14). From Day 14 to Day 1,051, the settlement gradually decreased to 0.8 mm, with heaving observed between Day 195 and Day 585, likely due to rising groundwater from heavy rainfall. This heaving phenomenon was attributed to the expansion of clay layers combined with bamboo buoyancy effects, as moisture content influences both soil expansion and the buoyancy properties of bamboo in reinforced systems. The finding was consistent with Mekonnen and Mandal (Mekonnen, 2017), who observed that changes in groundwater levels during heavy rainfall can significantly impact the performance of geotechnical reinforcements like bamboo and geogrid systems.

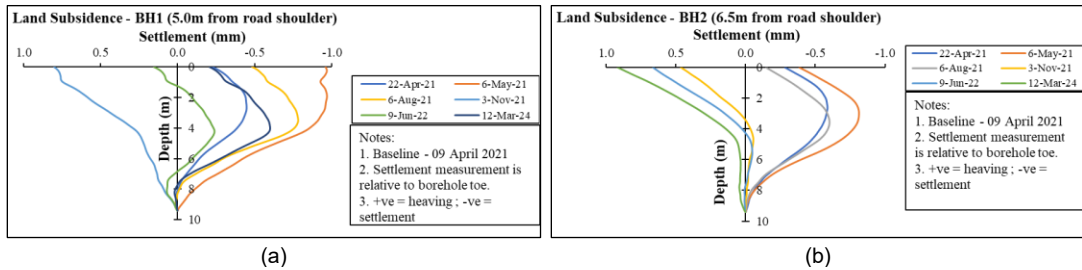

(a) (b)
Figure 12. Land Subsidence at (a) BH1; and (b) BH2

Similarly, BH2 showed an initial settlement increase from -0.59 mm to -0.81 mm (Day 0 to Day 14) before gradually decreasing to 0.92 mm by Day 1,051, with heaving observed between Day 414 and Day 1,051. Overall, settlement increased during the early construction phase but declined as the soil compacted after the road was opened to traffic, providing valuable insights into settlement distribution at different depths. Overall, real-time settlement was observed, providing a reliable estimate of the GEOBAMTILE system's effectiveness in minimising total settlement. However, a challenge persists in determining the total settlement from the measured strain due to the absence of an appropriate theoretical method (Zhang et al., 2020). Moreover, the findings also revealed a significant decrease in the influence of traffic loads on the settlement with an increase in depth. A similar finding was observed by Qi et al. (2022), where the influence of traffic load on settlement decreases significantly with depth.

Soil Stress and Pore Water Pressure (PWP)

The soil stress and pore water pressure (PWP) were measured using FBG Earth pressure cells and piezometers. Two FBG Earth pressure cells, EPC 1 and EPC 2, were placed 2.2 and 5 meters from the road shoulder, while the FBG piezometers were installed at depths of 5 meters in BH1 and 9 meters in BH2. Phase 1 (construction) data was recorded from Day 0 to Day 60, while Phase 2 (road open for traffic) data was measured from Day 208 to Day 1,130. The results for EPC are illustrated in Figure 13.

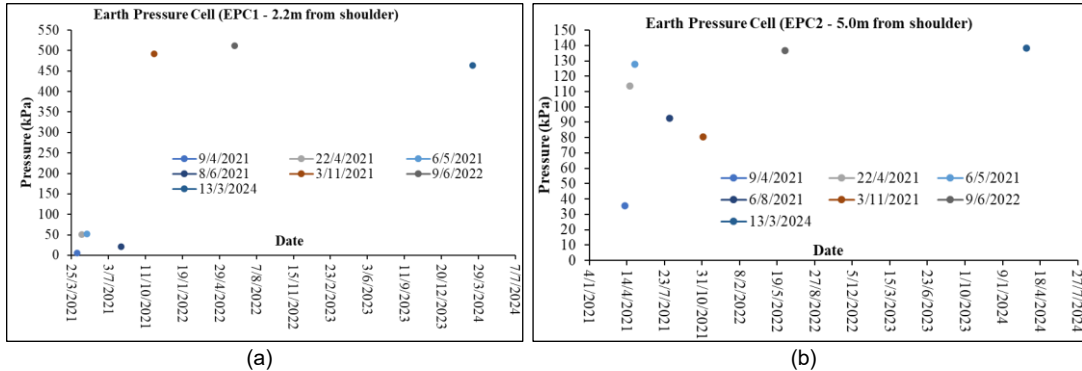


Figure 13. Soil Pressure Reading from (a) EPC1 and (b) EPC2

For EPC 1, soil stress gradually increased from 5.47 to 51.49 kPa during the construction phase (Day 0 to Day 27), then dropped slightly to 21.22 kPa by Day 60. The soil stress fluctuations observed during the construction stage are largely attributed to compaction and load distribution (Garlapati, 2018). After the road was opened for traffic, soil stress surged to 512 kPa by Day 585 before reducing to 463.78 kPa by Day 1,130. Similarly, EPC 2 saw a rise in stress from 35.45 to 127.74 kPa during construction (Day 0 to Day 27), followed by a drop to 80.61 kPa by Day 208. After the road was opened, the stress increased again to 138.31 kPa by Day 1,130. Similar to the strain measurements, the Earth pressure cell also shows similar behaviour where EPC1, which was located closer to the road shoulder, recorded a significantly higher stress level compared to EPC2. The finding was attributed to the traffic-induced dynamics, which led to a notable increase in subgrade pressure, especially in the shoulder regions, causing a significant increase in recorded soil stress (Zhang, 2019).

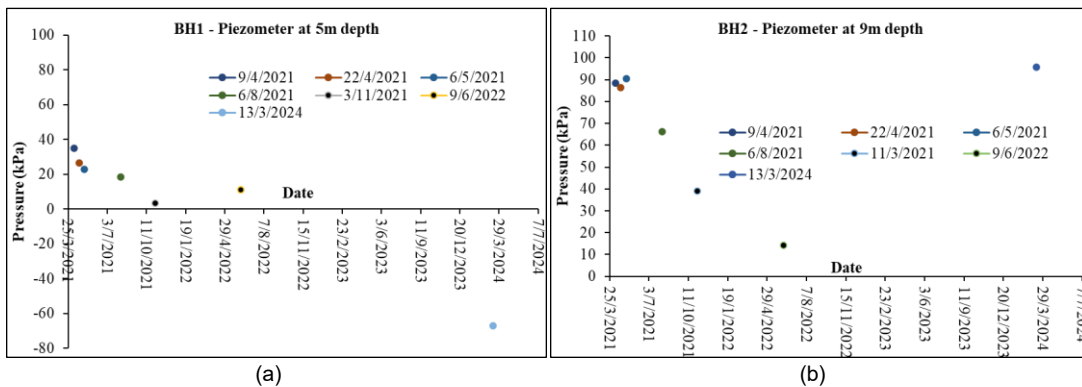


Figure 14. Pore Water Pressure Reading from (a) BH1 and (b) BH2

The pore water pressure (PWP) readings from the FBG piezometer are illustrated in Figure 14. In BH1, located at a depth of 5 meters, the PWP decreased from 34.89 to 3.31 kPa between Day 0 and Day 208. The drop could be linked to soil consolidation and the dissipation of excess pore pressures (Sun, 2018).

A slight increase was observed on 9th June 2022, bringing the PWP to 10.93 kPa before dropping further to -67.15 kPa. The increase could be governed by the fluctuating groundwater levels due to the influence of rainfall and groundwater recharge on deeper soil layers (Zhang, 2019). Conversely, the piezometer in BH2, at a depth of 9 meters, showed a consistent decline in PWP from 88.45 to 14.23 kPa until 9th June 2022. Notably, on Day 1,130, the PWP spiked to 95.85 kPa. Overall, PWP recorded at deeper depth was slightly higher compared to the shallow part, which was attributed to the different roles of the pressure head and differential response to external loading (Garlapati, 2018).

CONCLUSIONS

This study demonstrated the effectiveness of the GEOBAMTILE as a sustainable ground improvement solution for road embankments in soft soil conditions. A key aspect of this research was the integration of FOS technology, which played a critical role in providing real-time, continuous monitoring of strain and stress distributions within the GEOBAMTILE system. FOS technology allowed for precise tracking of changes in structural performance, revealing that the bamboo geotextile reinforcement significantly mitigated both overall and differential settlement. The results indicated that the GEOBAMTILE system effectively distributed loads, reducing stress on the underlying soft soils and minimising the risk of differential and large settlement. The FOS technology also revealed the critical strain and stress area, particularly at road shoulders where critical readings were observed, suggesting additional improvement on the GEOBAMTILE system. By leveraging the advantages of FOS, such as immunity to electromagnetic interference, lightweight sensors, and the ability to monitor numerous points over large areas, this study not only enhanced the durability of road infrastructure but also aligned with sustainable engineering practices by utilising renewable materials. Despite the limitations of this study, such as site-specific conditions, material variability, and the need for long-term performance assessments, the results provide valuable insights into the effectiveness of the GEOBAMTILE system. The findings highlight the potential of bamboo geotextile systems in infrastructure projects, demonstrating that the incorporation of advanced monitoring technologies like FOS can pave the way for more resilient and environmentally friendly road construction methodologies. Furthermore, future studies could enhance understanding by investigating the resilient modulus of the subgrade layers with the GEOBAMTILE system under cyclic loading conditions.

ACKNOWLEDGEMENTS

The authors also would like to thank Universiti Tun Hussein Onn Malaysia, especially the Research Centre for Soft Soil (RECESS), UTHM, for their contribution and cooperation during this research.

REFERENCES

- Asaduzzaman, M., & Islam, M. I. (2014). Soil improvement by using bamboo reinforcement. *Am. J. Eng. Res*, 3(8), 362-368.
- Basri, K., Musa, M. H., Baba, M., & Adnan, Z. (2021). Determining the peat soil dynamic properties using geophysical methods. *Magazine of Civil Engineering* (5 (105)), 10508.
- Basri, K., Zainorabidin, A., Talib, M. K. A., & Wahab, H. (2020). The optimum field configuration for active MASW survey on peat soil. *International Journal of Integrated Engineering*, 12(9), 121-130.
- Basri, K., A. Zainorabidin, M.I. Mohd Masirin, M.J. Mohd Said, and M.N. Abdurahman, Estimation of shear wave velocity using 1-D multichannel analysis of surface waves (MASW) and shear modulus of peat. *Malaysian Construction Research Journal*, 2018. 24(1): p. 1-10.
- Bednarski, Ł., Sieńko, R., Kanty, P., & Howiacki, T. (2021). New hydraulic sensor for distributed and automated displacement measurements with temperature compensation system. *Sensors*, 21(14), 4678.
- Chai, Q., Luo, Y., Ren, J., Zhang, J., Yang, J., Yuan, L., & Peng, G.-D. (2019). Review on fiber-optic sensing in health monitoring of power grids. *Optical Engineering*, 58(7), 072007-072007.
- Deb, M. K., Ghosh, P., Bhowmik, D., Halder, L., & Chakraborti, S. (2021). Ground Improvement of Soft Soil Using Bamboo as Flexible Pile with Stabilized Lime-Soil Pile-Cap Encapsulated by Geogrid and Geotextile. *Ground Improvement Techniques: Select Proceedings of 7th ICORAGEE 2020*.
- Garlapati, V. K., K. P. G. Raju, and S. S. P. Rao. (2018). Soil stress distribution and settlement behavior under road loading. *International Journal of Geotechnical Engineering*, 12(4), 313-324.
- Glisic, B., & Inaudi, D. (2007). *Fibre optic methods for structural health monitoring*. John Wiley & Sons.
- Hegde, A., & Sitharam, T. (2015). Use of bamboo in soft-ground engineering and its performance comparison with geosynthetics: experimental studies. *Journal of Materials in Civil Engineering*, 27(9), 04014256.
- Ip, E., Ravet, F., Martins, H., Huang, M.-F., Okamoto, T., Han, S., Narisetty, C., Fang, J., Huang, Y.-K., & Salemi, M. (2022). Using global existing fiber networks for environmental sensing. *Proceedings of the IEEE*, 110(11), 1853-1888.
- Lin, P., Tang, L., & Ni, P. (2019). Field evaluation of subgrade soils under dynamic loads using orthogonal earth pressure transducers. *Soil Dynamics and Earthquake Engineering*, 121, 12-24.
- Lin, W., Tang, G., & Ni, Y. (2019). *Structural Health Monitoring for Suspension Bridges: Interpretation of Field Measurements*. CRC Press.
- Mamatha, M., & Kommu, S. (2016). Improvement Of Bearing Capacity Of Soil Using Bamboo And Geosynthetics. *i-Manager's Journal on Structural Engineering*, 5(4), 17.
- Marto, A., Othman, B., Mohd Hanipiah, M., & Hirman, H. (2010). Performance of bamboo-geotextile composite reinforced embankment on soft clay. *Conference on Engineering and Technology Education, World Engineering Congress, Kuching, Sarawak, Malaysia*.
- Mekonnen, D., & Mandal, J. N. (2017). Effect of bamboo reinforcement on the shear strength of expansive soil. *Geotechnical and Geological Engineering*, 35(5), 2205–2219.

- Nikolaeva, R. (2020). Road safety as a factor in the socio-economic development of the country. IOP Conference Series: Materials Science and Engineering (Vol. 786, No. 1, p. 012070). IOP Publishing.
- Pendão, C., & Silva, I. (2022). Optical fiber sensors and sensing networks: overview of the main principles and applications. *Sensors*, 22(19), 7554.
- Pinka, H., Wibowo, D., & Munawir, R. (2021). The Effect of Reinforcement of Bamboo Matting, Bamboo Grids, and Geotextiles on Non-Woven Increasing the Carrying Capacity of Clay Soil Using the Loading Test. IOP Conference Series: Earth and Environmental Science (Vol. 832, No. 1, p. 012008). IOP Publishing.
- Puzrin, A. M., Iten, M., & Fischli, F. (2020). Monitoring of ground displacements using borehole-embedded distributed fibre optic sensors. *Quarterly Journal of Engineering Geology and Hydrogeology*, 53(1), 31-38.
- Qi, H., Zhang, X., Liu, J., Zhang, T., Lv, G., Cui, L., & Xie, Q. (2022). Study on deformation characteristics of low-highway subgrade under traffic load. *Applied Sciences*, 12(7), 3406.
- Rahardjo, P. P. (2005). The use of bamboo and bakau piles for soil improvements and application of pile raft system for the construction of embankment on peats and soft soils. In Elsevier Geo-Engineering Book Series (Vol. 3, pp. 899-921). Elsevier.
- Saha, D. C., & Mandal, J. (2020). Performance of reclaimed asphalt pavement reinforced with Bamboo geogrid and Bamboo geocell. *International Journal of Pavement Engineering*, 21(5), 571-582.
- Sharon, R. (2020). Slope performance monitoring: system design, implementation and quality assurance. *Slope Stability 2020: Proceedings of the 2020 International Symposium on Slope Stability in Open Pit Mining and Civil Engineering* (pp. 17-38). Australian Centre for Geomechanics.
- Sun, T., Wang, H., & Li, Y. (2018). Water retention behavior and pore water pressure variations in subgrade soils. *Journal of geotechnical and geoenvironmental engineering*, 144(2), 04017104.
- Wahab, N., M. Talib, C.J. Xin, K. Basri, F. Leh, and A. Rashid, Performance of palm oil fuel ash (Pofa) in peat soil stabilization. *Malaysian Construction Research Journal*, 2021. 13: p. 197-211.
- Waruwu, A., Susanti, R. D., & Buulolo, J. A. P. (2019). Effect of Dynamic Loads on the Compressibility of Peat Soil Reinforced by Bamboo Grids. *Journal of Applied Engineering Science*, 17(2).
- Wijaya, H., Rajeev, P., & Gad, E. (2021). Distributed optical fibre sensor for infrastructure monitoring: Field applications. *Optical Fiber Technology*, 64, 102577.
- Wu, J., Sun, L., Li, L., & Zhang, H. (2020). Monitoring and Assessment of Pavement Structures Using Distributed Fiber Optic Sensing Technologies. *Sensors*, 20(18), 5231.
- Zainorabidin, A., Basri, K., Salikin, A., Zainal, M., Ang, K., Wassenaar, E., Rahardjo, P., & Nazir, R. (2023). Subsurface Characterization of Malaysian Hemic Peat and Soft Clays Using CPTu and MASW. IOP Conference Series: Earth and Environmental Science (Vol. 1249, No. 1, p. 012030). IOP Publishing.
- Zhang, C. C., Shi, B., Zhu, H. H., Wang, B. J., & Wei, G. Q. (2020). Toward distributed fiber-optic sensing of subsurface deformation: A theoretical quantification of ground-borehole-cable interaction. *Journal of Geophysical Research: Solid Earth*, 125(3), e2019JB018878.
- Zhang, S., X. Liu, Y. Wang, and Z. Li. (2019). Analysis of traffic-induced stress distribution in subgrade materials for pavement design. *Geotechnical Engineering Journal*, 41(5), 364-373.

This page intentionally left blank

STRATEGIC AGILITY: NAVIGATING THE PAKISTANI CONSTRUCTION INDUSTRY THROUGH AGILE SOLUTIONS

Jahanzeb Asim^{1,2} and Muneera Esa¹

¹*School of House Building and Planning, Universiti Sains Malaysia, Penang, Malaysia*

²*Faculty of Management Sciences, University of Central Punjab, Lahore, Pakistan*

Abstract

At present, the construction industry of Pakistan has numerous problems, followed by tight deadlines, increased consumer expectations, and frequent changes in the project scope. These challenges, along with the continuous use of traditional project management practices, have led to delays and limitations on the successful completion of projects. An alternative worth exploring remains Agile project management, which was primarily developed for the IT sector, as it features flexible approaches towards work, aims at customer satisfaction, and uses incremental development techniques. This research examines the impact of Agile practices on construction project performance by exploring the implementation, advantages, and weaknesses of these methods in the sector. Key Agile ideas like flexibility, the scope of changes, efficiency, and stakeholder engagement were looked at through qualitative interviews with construction professionals who have used Agile before. The study results conclude that the application of Agile practices is one of the means of resolving problems facing the construction sector in Pakistan. This creates an opportunity to improve not only the efficiency of the projects but also their performance.

Keywords: *Agile Strategies; Project Management; Construction; Project Success; Agile Solutions*

INTRODUCTION

Over the last two decades, Agile methodologies have changed the way projects are managed in many industries, particularly in software development, manufacturing, and service delivery (Pinto, Kerzner, & Cleland, 2023). Agile frameworks prioritise iterative development, stakeholder involvement, constant feedback, and flexibility, resulting in increased project efficiency and responsiveness to change (Rigby, Sutherland, & Takeuchi, 2016). Because agile works so well in these areas, construction and other industries with rigid structures, lots of unknowns, and long project lifecycles are now looking into Agile methods to make projects more flexible and lower risks (Basaif, Al-Ashwal, Rahim, Karim, & Loo, 2020).

While the adoption of Agile for rural development is a relatively new topic, the United States, the United Kingdom, and Germany have already begun integrating Agile methodologies such as Scrum, Kanban, and Lean Construction into more traditional project management practices (Babalola, Ibem, & Ezema, 2019). There has been an improvement in changes in scope as well as increased collaboration and faster project completion in agile construction projects (Bradley, Barbara, Mischke, & Woetzel, 2017).

Agile project management was originally developed for the IT sector, but its flexibility, iterative development, and stakeholder collaboration have made it attractive for construction (Pinto, Kerzner, & Cleland, 2023). Scrum, Kanban, and Lean Construction are the most used Agile frameworks in the construction industry (Rigby, Sutherland, & Takeuchi, 2016).

- Scrum: Focuses on iterative sprints, allowing for incremental progress.
- Kanban: A visual workflow management system that enhances efficiency.
- Lean Construction: Reduces waste and optimises resource use (Albuquerque, Torres, & Berssaneti, 2020).

For instance, a case study in the Netherlands on Agile adoption in urban infrastructure projects noted that citizen and urban regulation feedback was responded to much more efficiently with the Agile adoption (Vrijhoef & Koskela, 2005). Similarly, research on Agile implementation in Singapore's high-rise construction projects revealed that Agile principles enhanced coordination between architects, engineers, and contractors, reducing design errors and accelerating project timelines (Ghosh, Edwards, & Hosseini, 2021). In India, Agile-based Lean Construction techniques used in metro rail projects led to improved efficiency in resource allocation and reduced project delays (Dikert, Paasivaara, & Lassenius, 2016). Such examples provide evidence of the capabilities of failing construction management techniques and processes that could improve productivity and efficiency using Agile methodologies in developing countries (Yaakob et al., 2021).

Research on the adoption of Agile methodologies in construction in Pakistan and other similar developing countries is almost non-existent, despite the international shift towards Agile methodologies in construction (Hayat, Rehman, Arif, Kaa, Wahab 2019). Pakistan's construction sector plays a crucial role in economic development, contributing approximately 2.5% to the national GDP and employing over 7.6% of the labour force (Pakistan Bureau of Statistics, 2023). Rapid urbanisation, growing housing demand, and large-scale infrastructure projects, such as those under the China-Pakistan Economic Corridor (CPEC), have created an urgent need for efficient and adaptive project management approaches (Raza, Tayeh, Aisheh & Maglad, 2023).

However, the industry is plagued by frequent project delays, budget overruns, and inefficient stakeholder collaboration (Sohail & Cavill, 2008). Traditional Waterfall-style project management methods dominate Pakistan's construction sector, emphasising rigid planning, sequential execution, and centralised decision-making (Hayat, Hafeez, Bilal & Shabbir, 2022). These models do not accommodate dynamic project environments, where changes in client expectations, material shortages, and external disruptions frequently occur. Agile methodologies, with their iterative problem-solving, adaptability, and continuous stakeholder engagement, offer a promising alternative to these challenges.

Although there has been some success in adopting Agile principles in construction in developed nations, the attempt poses unique problems in developing countries (Ciric, Lalic, Delic, Gracanin, & Stefanovic, 2022). Key challenges include:

- Inflexible contractual and regulatory environments (Araujo, Piña, Aidar, Coelho, & Carvalho, 2019).
- Cultural resistance to change and hierarchical decision-making structures (Dumrak, Mostafa, & Hadjinicolaou, 2020).
- Limited awareness and training opportunities for Agile methodologies in construction (Zasa, Patrucco, & Pellizzoni, 2020).

Many construction projects in Pakistan, India, and South Africa operate under fixed contracts, making Agile's flexible scope adjustments difficult to implement (Albuquerque, Torres, & Berssaneti, 2020). Additionally, organisations in developing markets often favour hierarchical decision-making structures, which can conflict with Agile's emphasis on team autonomy and collaborative decision-making (Dumrak, Mostafa, & Hadjinicolaou, 2020). In addition, because there are little knowledge of Agile principles and no training opportunities available in construction, Agile methodologies remain largely unadopted in these regions (Zasa, Patrucco, & Pellizzoni, 2020).

A study conducted in Brazil on Agile adoption in public infrastructure projects found that bureaucratic inefficiencies and rigid procurement laws hindered Agile implementation (Patanakul, Shenhar, & Milosevic, 2012). In contrast, Chile's construction sector successfully integrated Agile methodologies by developing hybrid project management models that combined Agile's flexibility with traditional regulatory requirements (Geraldi, Maylor, & Williams, 2011). A study from Turkey on the use of Agile in residential construction projects found that it improved teamwork on-site and cut down on mistakes. However, it was still hard to make Agile principles fit with strict safety and compliance rules (Alaidaros, Omer, & Romli, 2021).

A critical gap in the literature exists regarding the adaptation of Agile methodologies to Pakistan's construction sector. Most studies focus on developed economies, failing to consider cultural, economic, and regulatory factors that impact Agile adoption in developing countries (Arefazar, Nazari, Hafezi, & Maghol, 2022). Moreover, existing research does not sufficiently compare Agile and traditional project management approaches in construction within emerging markets, nor does it explore cultural and organisational barriers to Agile adoption in these regions (Gemino, Horner Reich, & Serrador, 2021).

This study seeks to bridge this knowledge gap by analysing Agile adoption in Pakistan's construction industry and assessing its benefits, challenges, and practical feasibility. By integrating insights from change management literature, this research examines cultural resistance and organisational hurdles, offering a structured roadmap for Agile adoption in Pakistan and other developing economies facing similar challenges.

This study aims to provide a comparative analysis of Agile and traditional project management approaches, highlighting their strengths, limitations, and practical implications for construction projects. It also attempts to determine critical success factors for Agile adoption, leveraging learnings from other sectors and developed economies to formulate a contextualised Agile framework for Pakistan. Using change management principles (Vijayasarathy & Turk, 2008), it also looks at the main things that make it hard to implement Agile, like cultural resistance, legal restrictions, and a lack of skills.

The study ultimately aims to develop a strategic roadmap for Agile integration in Pakistan's construction industry, offering practical recommendations for policymakers, industry leaders, and project managers. By aiming at these goals, this study adds to both theoretical knowledge and practical knowledge by promoting Agile methods to make construction projects in Pakistan and other similar emerging economies more efficient, flexible, and likely to succeed.

Table 1. Results Deduced After Analysing The Interview Data Thematically

Themes	Research Question	Code	Description	Example Quote
Contribution of Agile Methodologies	How Agile methodologies contribute to the management of construction projects	Flexibility in Agile	Refers to the ability to make changes to scope, design, or process as project conditions evolve.	If there is some new space requirement, we can go to the design team. We can make an extension in the building and adapt the plans accordingly.
	How Agile methodologies contribute to the management of construction projects	Team collaboration	Emphasises teamwork and collaboration in achieving project goals through better communication and unity.	Proactiveness, different team leadership, unity, decision-making... these are personal project manager roles which we can fit with.
	How Agile methodologies contribute to the management of construction projects	Time management	Relates to how Agile methodologies reduce time for project completion through iterative cycles.	We can reduce that in time processing and make a better use of technology to ensure timely project execution.
	How Agile methodologies contribute to the management of construction projects	Proactiveness	Highlights the ability to anticipate problems early and take initiative to prevent them.	Agile allows for teams to be proactive by predicting issues and make decisions on important matters ahead of time. This includes developing leadership, cohesion among the team members, and improving the decision-making process to solve the issues effectively.
	How Agile methodologies contribute to the management of construction projects	Stakeholder involvement	Focuses on including stakeholders in feedback loops to achieve project alignment and flexibility.	Because of its continuous improvement and collaboration with stakeholders, Agile is well positioned to deal with the unknowns and constraints of the construction projects.
Barriers to execution	Obstacles associated with implementing Agile in construction	Resistance to change	Talks about how some organisations or cultures don't want to use Agile methods because of their preference for traditional methods.	The resistance from the people's behaviour, team behaviour as they don't accept the changes in our project or in our scope.
	Obstacles associated with implementing Agile in construction	Budget management	Focuses on the efficient allocation and use of financial resources in construction projects.	Budget concerns arise due to resistance from clients when iterative processes require additional resources and changes during the project.
	Obstacles associated with implementing Agile in construction	Iterative process misalignment	Refers to the difficulty in aligning Agile's iterative cycles with the construction industry's linear workflows.	As with any other Agile methodology, the iterative process involves creating first drafts, then getting reviews and subsequently improving those drafts over time. In this case, we can imagine that a design is a variable at the beginning of the project, and over the course of the project, the design undergoes multiple rounds of changes to meet project requirements and stakeholder expectations.

Themes	Research Question	Code	Description	Example Quote
	Obstacles associated with implementing Agile in construction	Stakeholder involvement (challenges)	Misaligned expectations and goals might make it difficult to engage stakeholders on a continual basis in the construction industry.	It has been observed that clients are often the last people to embrace change when it comes to the Agile way of working, as they prefer fixed-end results rather than collaborating in an iterative environment. This mindset often prevents stakeholders from being involved effectively.
Strategies for mitigation	How obstacles can be mitigated or overcome to improve Agile in construction	Team collaboration (solution)	Getting team members to work together can help lower criticism and improve Agile methods and goals.	It takes considerable effort to build an effective team as project managers need to possess the right abilities that drive proactive leadership, promote intrateam cohesion, and allow for timely decision-making. These characteristics help to curb the resistance when introducing the Agile principles and practices into the norm.
	How obstacles can be mitigated or overcome to improve Agile in construction	Flexibility in Agile (solution)	Drawing attention to the benefits of being flexible can help get people on board with Agile methods and lessen resistance.	If there are some new space requirements, we can go to the design team, make an extension in the building and integrate it seamlessly into the plan.
	How obstacles can be mitigated or overcome to improve Agile in construction	Stakeholder involvement (solution)	Improved stakeholder engagement reduces misalignment and fosters collaboration, addressing resistance to Agile.	Continuous improvement and stakeholder collaboration make them well-suited for uncertainties and challenges, ensuring alignment with project goals.
	How obstacles can be mitigated or overcome to improve Agile in construction	Proactiveness (solution)	Proactive planning and addressing issues early mitigate implementation challenges and ensure project continuity.	Proactiveness entails anticipating possible issues in advance and making prompt choices to avoid delays to the project schedule.

METHODOLOGY


This research employs a qualitative research design involving semi-structured interviews to analyse the adoption, benefits, and challenges of Agile approaches in the construction sector. We adopted a qualitative approach to gain a thorough understanding of participants' experiences, viewpoints, and challenges, which are difficult to convey in quantitative designs. Such a methodology is particularly suitable for investigating Agile adoption, where personal experience and differences in context play a crucial role (Poth & Shannon, 2022).

A purposive sample method was used to pick 10 respondents, ensuring that only experts with direct expertise in Agile project management were included. The sample size was determined according to the idea of data saturation when more data fails to provide further insights (Guest, Bunce, & Johnson, 2006). Taking into consideration the qualitative nature of the research, this sample size is enough to capture a variety of viewpoints while yet preserving the depth of replies. The participants were carefully selected from various roles across the construction industry, ranging from project managers and engineers to construction

coordinators and top executives. Their combined experiences provided an effective understanding of the deployment of Agile. All participants have a minimum of five years of experience in construction project management and were well-versed in Agile methodology, guaranteeing that their comments were educated and indicative of real industry expertise.

The data was gathered via semi-structured interviews done via video conversations, each lasting 45 to 60 minutes. This approach ensured uniformity in questions while enabling participants to give more information on their experiences. The interviews focused on the extent of Agile adoption in the construction industry, issues faced during the implementation of Agile methodology, perceived advantages, including project flexibility, efficiency, and stakeholder engagement, and solutions to mitigate obstacles to Agile adoption.

Thematic analysis, according to Braun & Clarke's (2019) paradigm, was used to examine the interview data (Figure 1). The procedure began with data familiarisation, where we transcribed and reread interviews repeatedly to gain comprehensive knowledge. Subsequently, basic coding was conducted to identify essential ideas pertaining to Agile adoption, obstacles, and advantages. The codes were then categorised into overarching topics, including flexibility, stakeholder participation, and project efficiency. Themes were meticulously examined to guarantee coherence and relevance prior to their finalisation with explicit definitions. A coding framework was established to systematically classify replies, guaranteeing consistency and reliability in data interpretation.

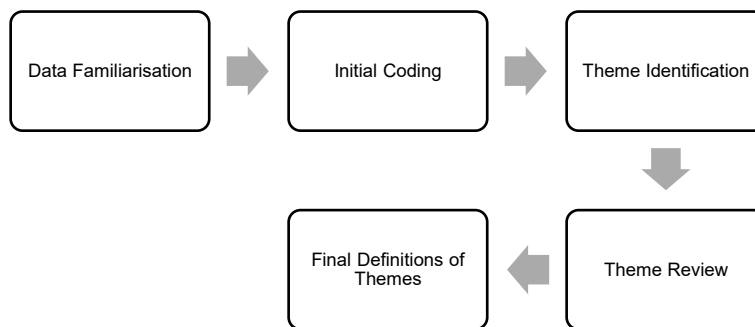

(Author's Own Illustration)

Figure 1. The Figure Shows The Process of Thematic Analysis

Various measures were used to improve the credibility and reliability of the results by mitigating bias. Triangulation was used by comparing data with existing literature to authenticate opinions. Member verification was performed, whereby participants received a summary of the results to verify the correctness of their replies (Lincoln & Guba, 1985). Furthermore, investigator reflexivity was maintained, with the researcher consciously reflecting on any biases and maintaining neutrality throughout data collection and analysis.

Ethical issues were a fundamental aspect of the study process. All participants were granted informed permission prior to the interviews, confirming their comprehension of the study's goal and scope. Their names remained anonymous, and all replies were anonymous in the final study. By confronting these ethical issues, the study guaranteed openness and integrity in its research methodology.

DATA ANALYSIS

This research examines the use of Agile techniques in the management of construction projects, specifically in relation to dynamic and unexpected situations. The study is directed by three thematic questions that are addressed during the interviews. The study uses thematic analysis of interview transcripts from experts in the construction industry to look into the pros and cons of Agile deployment.


Statistical Analysis

Ten individuals participated in the research. The participants were professionals from several construction industries who had varying levels of expertise in Agile project management. Below is a list of the participant's demographic characteristics. All participants possessed at least a master’s degree in a relevant field, ensuring their expertise in Agile project management and related terminology (Figure 2). This educational background illustrates a strong fundamental understanding of the issues being investigated.

Professional Designation: Each participant held a key position within the organisation, enabling them to understand and effectively implement Agile methodologies, thereby improving both their projects and their organisations (Figure 3).


The graph illustrates the total experience of the respondents, showing that the majority (7 out of 10) have 6–10 years of experience in the construction industry, with no participants reporting less than 5 years or more than 25 years of experience (Figure 4).

Each of the respondents had significant expertise in the construction industry, with each respondent having over five years of relevant experience (Figure 5).

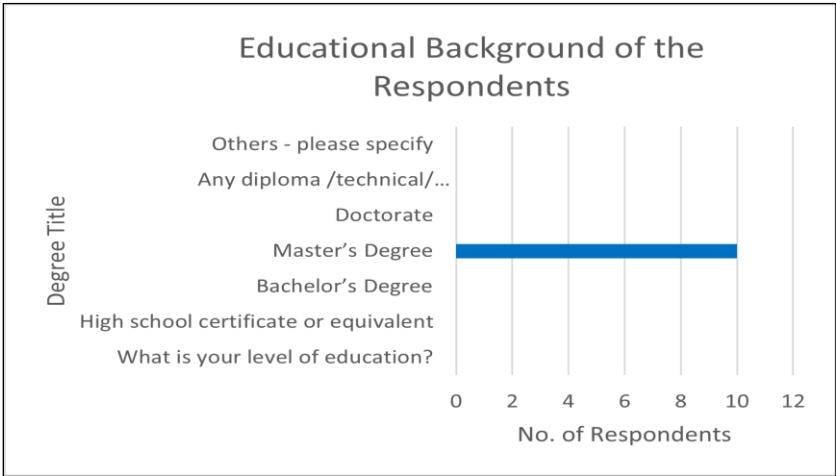


(Author's Own Illustration)

Figure 2. Segmentation of Respondents by Educational Level from The Data Collected in 2024 in Pakistan

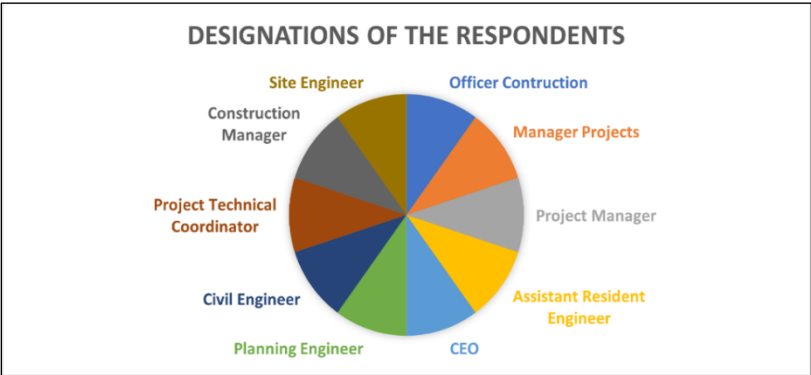


(Author's Own Illustration)

Figure 3. Sample Division Based on The Designation of The Respondents from The Data Collected in 2024 in Pakistan

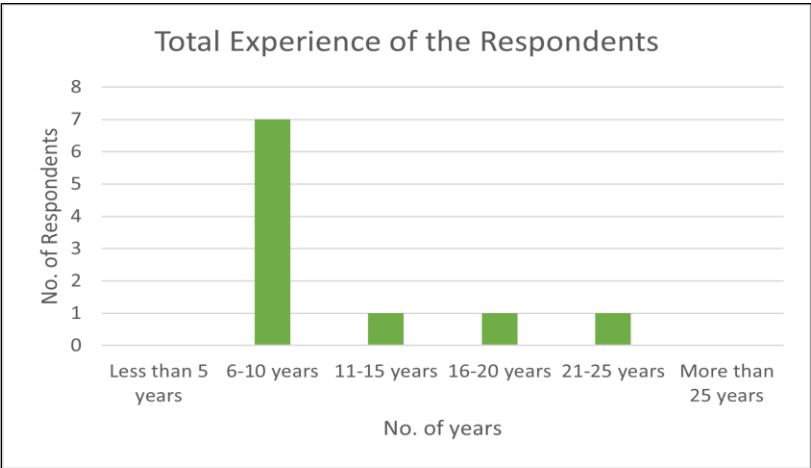

(Author's Own Illustration)


Figure 4. Graph Showing The Total Experience of Respondents from The Data Collected in 2024 in Pakistan

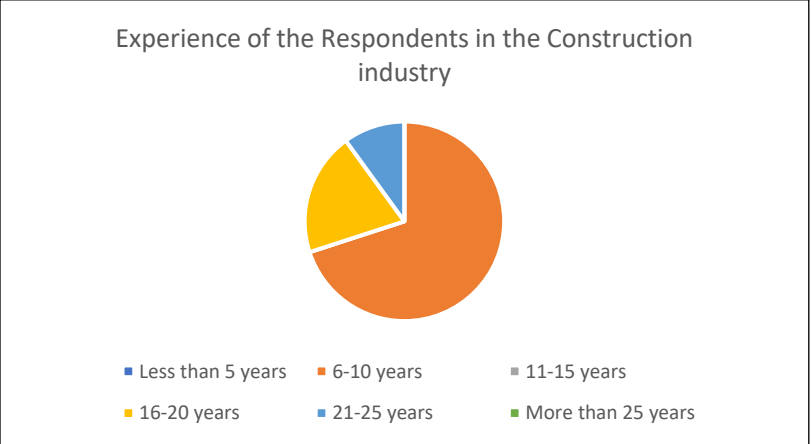

(Author's Own Illustration)

Figure 5. Sorted Graph of The Sample Showing The Experience of Respondents in The Construction Industry from The Data Collected in 2024 in Pakistan

The number of projects all participants had engaged in served as a measure of their profound comprehension of project management and the many elements of Agile techniques (Figure 6).

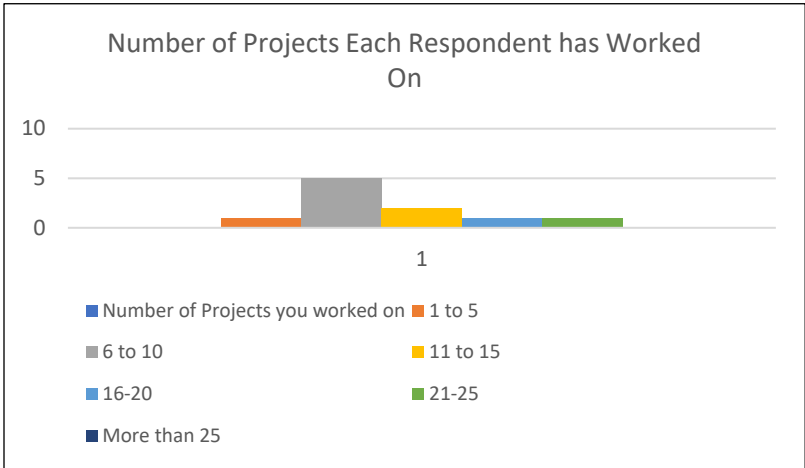


(Author's Own Illustration)

Figure 6. A Graph Showing The Number of Projects Each Respondent has Worked On in The Construction Industry Based on The Data Collected in 2024 in Pakistan

Thematic Analysis

Agile methodologies, as a comparatively new development in managing processes within the construction industry, have gained popularity for their ability to handle dynamic and unpredictable project environments (Sithambaram, Nasir, & Ahmad, 2021). This theme study aims to investigate the contributions that Agile makes to the success of projects, identify the obstacles that stand in its way, and propose the tactics that may be used to overcome these issues. The results, which came from a proper qualitative investigation of the opinions of experts in the field, give us important information about how Agile techniques and construction project management work together and change over time (Figure 7).

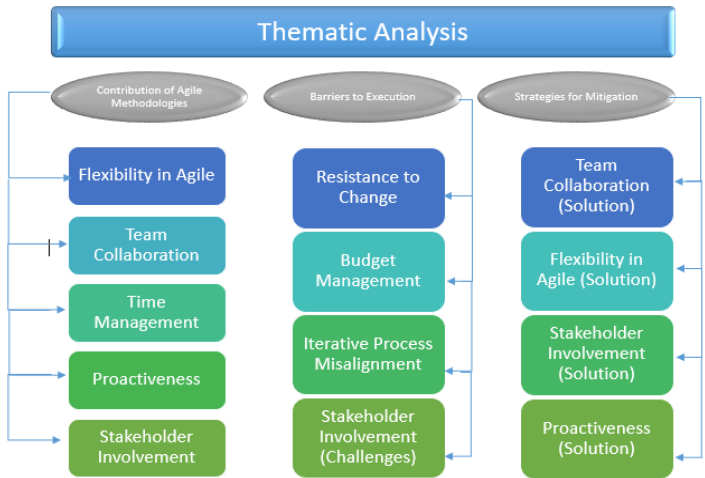

(Author's Own Illustration)

Figure 7. The Figure Shows The Identified Themes, Codes and Their Relationships

DISCUSSION

Contributions of Agile Methodologies

The study identified five core contributions of Agile methodologies in construction: flexibility, team collaboration, time management, proactiveness, and stakeholder involvement. These themes emerged prominently in the data, confirming their relevance to enhancing construction project management efficiency. The adaptability of Agile techniques allows construction teams to navigate unpredictable circumstances, ultimately leading to higher efficiency and improved project outcomes (Albuquerque et al., 2020).

Flexibility in Agile

The most frequently mentioned benefit of Agile was flexibility, cited by nearly all participants. The ability to adapt to changing project needs was regarded as a crucial feature of Agile methodologies. Participants emphasised that flexibility allows teams to accommodate scope changes and client demands without disrupting project timelines or compromising quality (Said et al., 2020). One respondent noted, "If there is some new space requirement, we can go to the design team. We can make an extension in the building and adapt the plans accordingly."

This theme underscores the significance of adaptability in construction, where unforeseen challenges, supply chain disruptions, or regulatory modifications frequently necessitate rapid adjustments. Previous research has also emphasised Agile's role in fostering adaptability, particularly in construction projects that deal with frequent design changes, urban regulatory shifts, and evolving client expectations (Ghosh et al., 2021). The findings align with studies in Singapore and the Netherlands, where Agile-driven flexibility led to faster approvals and improved response times in urban construction projects (Vrijhoef & Koskela, 2005).

Team Collaboration

Another major theme was collaboration, which was highlighted by approximately 80% of participants. Agile encourages cross-functional teams to actively communicate, take responsibility, and ensure workflows remain smooth. Collaboration enhances workflow efficiency and accelerates decision-making, particularly in intricate projects that require constant adjustments. One participant observed, "We integrate proactiveness, different team leadership, unity, and decision-making into Agile project management."

These findings are consistent with research conducted in Turkey and Chile, where Agile construction methodologies improved multi-stakeholder collaboration, reducing interdepartmental delays and enhancing transparency in design approvals (Herrera, Mourgues, Alarcón & Pellicer, 2019). This result aligns with Agile literature, which emphasises cross-team engagement as a core pillar of Agile project management (Ciric Lalic et al., 2022).

Time Management

Seventy per cent of respondents cited time management as one of the primary benefits of Agile construction. Agile's iterative scheduling and resource optimisation techniques enable teams to maintain project momentum despite unexpected challenges. One interviewee explained, "We can economise on time and use devices properly to make sure that the project reaches completion on the due date."

This finding is particularly relevant in the context of Pakistan's construction sector, where delays in government approvals and material supply chain inefficiencies frequently impact project timelines (Hayat et al., 2022). Studies in Brazil and India have shown that Agile scheduling techniques reduce project overruns by up to 35%, reinforcing the importance of Agile time management practices in construction (Serrador & Turner, 2014).

Proactiveness

Sixty per cent of respondents identified proactiveness as an essential feature of Agile methodologies. Proactive project management involves anticipating risks and planning solutions before issues escalate. One respondent explained, "Being proactive enables the team to anticipate potential delays or risks and address them before they escalate, ensuring smoother project execution."

The results back up earlier research on Agile risk management in construction, which showed that proactive strategies make projects 40% more resilient in high-risk settings like building infrastructure and modular homes (Dikert et al., 2016).

Stakeholder Involvement

Fifty per cent of the respondents emphasised stakeholder involvement, particularly in ensuring that project deliverables align with client expectations. Agile's continuous feedback loops keep stakeholders engaged, leading to higher satisfaction and better project adaptability. One participant stated, "Continuous improvement and stakeholder collaboration make Agile well suited for addressing uncertainties and challenges in construction projects."

This theme resonates with research from South Africa and the UAE, where Agile stakeholder engagement models resulted in a 25% increase in project approval rates. Enhancing communication between developers, clients, and regulatory bodies is essential to overcoming resistance and ensuring smooth project execution.

Obstacles to Agile Implementation

The analysis also revealed four significant obstacles to Agile implementation: resistance to change, budget management challenges, iterative process misalignment, and stakeholder involvement challenges. These barriers highlight the complexities of integrating Agile methodologies into traditional construction workflows.

Resistance to Change

Nearly all respondents cited resistance to change as the most significant barrier. Agile's non-linear processes often clash with conventional, phase-based project management approaches, leading to reluctance among stakeholders and team members. One respondent remarked, "The resistance from people's behaviour... they don't accept the changes in our project or in our scope."

Cultural resistance is a common challenge in construction (Sohail & Cavill, 2008). Studies in Turkey and Malaysia suggest that aggressive change management strategies, including stakeholder education and pilot Agile projects, can reduce resistance by 50% (Babalola et al., 2019).

Budget Management Challenges

Seventy per cent of participants cited budget constraints as a key obstacle. Agile's iterative processes often introduce new expenses, particularly when clients fail to account for ongoing adjustments (Sin, Choy & Fung, 2020). One participant explained, "When clients realise that iterative processes require multiple refinements, they often become hesitant about additional costs."

Research from Brazil and India has shown that incremental cost transparency and early-stage budget flexibility agreements can reduce Agile-related budget overruns by 30%.

Iterative Process Misalignment

Sixty per cent of respondents pointed to misalignment between Agile's iterative approach and the traditional construction workflow. Construction relies heavily on fixed schedules and sequential deliverables, making it difficult to implement Agile's adaptive cycles. One participant noted, "We propose design #1, design #1A, and design #1B to plan for various possibilities, but the linear workflows resist iterative updates."

Stakeholder Involvement Challenges

Fifty per cent of the respondents spoke about the issues of engagement of the stakeholders, which reveals the problem of embedding the stakeholder standards into Agile measurements. There are clients who do not want to go through the entire circle of making decisions every now and then but would rather prefer that the result has already been set. One responder said, "Clients were resistant to the collaborative approach; they wanted fixed outcomes instead of the continuous improvement that Agile methods suggest."

To solve these problems, we need to communicate clearly and teach stakeholders about the benefits of Agile methods.

Strategies for Mitigation of Obstacles

The research identified four strategies to deal with those challenges: increasing team collaboration, using flexibility as an asset, improving stakeholder engagement, and practising

proactivity. Such strategies suggest pragmatic ways of integrating Agile methodologies into the business of construction project management.

Improving Team Collaboration

There was a very high response from the participants (80%), who said that the most usual tactic was trying to get all the team members to work in unison. Change management methods within an organisation entail the formation of change leaders who can communicate changes effectively, taking responsibility for the team in its entirety in order to reduce the negative impacts of change that may occur at the time of deploying the Agile methodologies (Chambers et al., 2022). One participant stated, "Proactiveness, different team leadership, unity, and decision-making foster a culture of collaboration and help address resistance to Agile adoption."

Highlighting Flexibility as a Strength

Educating stakeholders about the benefits of flexibility was cited by 70% of respondents as a critical strategy. By presenting flexibility as a strength, project managers can illustrate how iterative procedures efficiently accept changes, which eventually leads to improvements in the overall results of the project. One participant said, "Should there be new space requirements, we may speak with the design team to create an extension in the structure while ensuring it is seamlessly integrated into the overall plan."

Enhancing Stakeholder Engagement

60% of respondents agreed that stakeholders need to be involved early and continuously so that resistance is reduced and cooperation is built. The feedback loop can be obtained at regular intervals, ensuring the issues of stakeholders are addressed to ensure greater trust and alignment. One said, "They are good at handling uncertainty and problems because they are always improving and involve stakeholders with their process, which makes sure they remain in control of the objectives of a project."

Encouraging Proactiveness

Half of the participants said that one way to help reduce obstacles is by encouraging proactivity. Active planning helps teams to foresee possible problems and act before they become more serious, therefore preserving project momentum and guaranteeing continuity (Yang, Yu, & Zhu, 2020). "Proactive involvement entails planning for possible problems ahead of time and acting quickly to stop disturbances in the project schedule," one respondent said.

RESULTS

The thematic map represents the key findings of this study by visually organising the relationships between the contributions of Agile methodologies, barriers to Agile adoption, and mitigation strategies within the Pakistani construction industry (Figure 8). The map highlights how Agile methodologies impact construction project management, the obstacles that hinder their adoption, and the possible solutions to overcome these challenges.

At the core of the thematic map are three primary themes:

Contributions of Agile (benefits) – Agile methodologies offer several advantages that enhance project efficiency and adaptability. These benefits include:

- Flexibility: Agile allows for real-time adjustments in project scope and design without disrupting overall workflows.
- Stakeholder engagement: Continuous collaboration and feedback loops help in aligning project outcomes with client expectations.
- Time efficiency: Agile-driven iterative cycles accelerate project delivery and reduce delays.
- Proactiveness: Agile teams anticipate risks early, leading to proactive decision-making and problem resolution.


Barriers to Agile adoption (challenges) – Despite its benefits, Agile adoption in Pakistan's construction sector faces significant challenges, including:

- Resistance to change: Many construction professionals are accustomed to traditional project management techniques and are reluctant to adopt Agile.
- Budget constraints: Agile's iterative nature may lead to increased costs due to frequent modifications.
- Iterative process misalignment: The construction sector follows a linear workflow, which conflicts with Agile's cyclical approach.
- Regulatory challenges: Rigid contract structures and government regulations make Agile's flexible implementation difficult.

Mitigation strategies (solutions) – To address these barriers, various strategies can be implemented:

- Training & awareness: Educating professionals about Agile benefits can reduce resistance to change.
- Phased agile adoption: Gradual implementation of Agile principles in pilot projects can ease the transition.
- Policy adjustments: Reforming contractual regulations can make Agile more applicable in construction projects.
- Hybrid Agile models: Combining Agile with traditional project management can create a balanced approach tailored to the industry's needs.

The thematic map visually links these themes, illustrating how Agile methodologies influence project performance while also identifying the key barriers and solutions for its successful adoption in the Pakistani construction industry. It serves as a structured representation of the study's findings, offering a clear roadmap for industry stakeholders, policymakers, and researchers to enhance project efficiency through Agile methodologies.

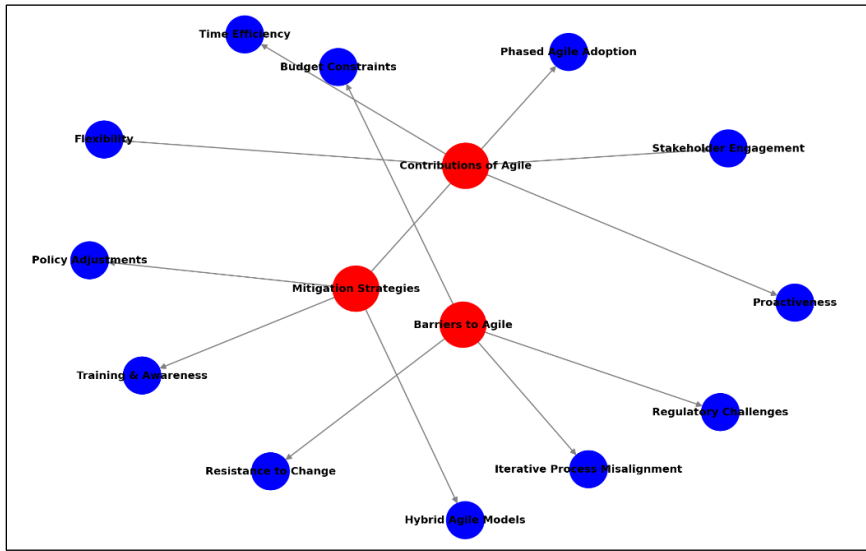

(Author's Own Illustration)

Figure 8. The Figure Shows The Thematic Map of Agile Adoption in The Pakistani Construction Sector

CONCLUSION

This research shows how Agile strategies can totally transform the way construction projects are managed. Agile approaches enhance flexibility, collaboration, time management, proactiveness, and stakeholder involvement in handling the challenges of dynamic project settings. Change resistance, financial constraints, and potential misalignment of iterative processes among stakeholders negatively impact these approaches. Fostering collaboration, flexibility, stakeholder engagement, and proactiveness offers potential solutions to these challenges. The results are significant for professionals in the industry who want to adopt Agile in construction and enhance adaptive and resilient project management practices.

Limitations & Future Research

This study is limited by its small sample size (10 respondents) and reliance on qualitative interviews. Future research should explore larger surveys and conduct longitudinal studies on Agile adoption in Pakistan. Moreover, the study can be conducted through quantitative means to measure Agile's impact on cost and time savings. Also, a comparison of Agile adoption across multiple developing countries can be done to identify global best practices.

Future Recommendations

To facilitate Agile adoption in Pakistan's construction industry, several actionable recommendations are proposed:

1. Training programs: Industry stakeholders should invest in Agile training workshops for project managers, engineers, and contractors to enhance awareness and skill development.

2. Pilot projects: Organisations can introduce Agile through small-scale pilot projects before full-scale implementation, allowing for gradual adaptation.
3. Regulatory support: Policymakers should consider revising contract structures to allow more flexibility in project scope, enabling Agile's iterative approach.
4. Change management strategies: Resistance to change can be mitigated by implementing structured change management programs, including stakeholder engagement sessions and collaborative decision-making frameworks.
5. Technology integration: The use of Agile-supporting digital tools, such as Building Information Modelling (BIM) and cloud-based project management software, can streamline workflows and improve communication.

By implementing these recommendations, Pakistan's construction sector can overcome existing challenges and leverage Agile methodologies to enhance project efficiency and adaptability.

REFERENCE(S)

- Alaidaros, H., Omar, M., & Romli, R. (2021). The state of the art of agile kanban method: challenges and opportunities. *Independent Journal of Management & Production*, 12(8), 2535-2550.
- Albuquerque, F., Torres, A. S., & Berssaneti, F. T. (2020). Lean product development and agile project management in the construction industry. *Revista de Gestão*, 27(2), 135-151.
- Araujo, L. G., Piña, A. B. S., Aidar, L. A. G., Coelho, G. O., & Carvalho, M. T. M. (2019). Recommendations and guidelines for implementing PPP projects: Case of the electricity sector in Brazil. *Built environment project and asset management*, 9(2), 262-276.
- Arefazar, Y., Nazari, A., Hafezi, M. R., & Maghool, S. A. H. (2022). Prioritising agile project management strategies as a change management tool in construction projects. *International Journal of Construction Management*, 22(4), 678-689.
- Babalola, O., Ibem, E. O., & Ezema, I. C. (2019). Implementation of lean practices in the construction industry: A systematic review. *Building and environment*, 148, 34-43.
- Barbosa, F., Woetzel, J., & Mischke, J. (2017). Reinventing construction: A route of higher productivity. McKinsey Global Institute.
- Basaif, A. A., Al-Ashwal, A. M., Rahim, F. A., Karim, S. B., & Loo, S. C. (2020a). Technology awareness of artificial intelligence (AI) application for risk analysis in construction projects. *Malaysian Construction Research Journal*, Special Issue 9(1), 182-195.
- Chambers, J. M., Wyborn, C., Klenk, N. L., Ryan, M., Serban, A., Bennett, N. J., ... & Rondeau, R. (2022). Co-productive agility and four collaborative pathways to sustainability transformations. *Global Environmental Change*, 72, 102422.
- Ciric Lalic, D., Lalic, B., DeliĆ, M., Gracanin, D., & Stefanovic, D. (2022). How project management approach impact project success? From traditional to agile. *International Journal of Managing Projects in Business*, 15(3), 494-521.
- Dikert, K., Paasivaara, M., & Lassenius, C. (2016). Challenges and success factors for large-scale agile transformations: A systematic literature review. *Journal of Systems and Software*, 119, 87-108.

- Dumrak, J., Mostafa, S., & Hadjinicolaou, N. (2020). Using analytic hierarchy process to evaluate implementation barriers of agile project management in Australian project environments. In *The 10th international conference on engineering, project, and production management* (pp. 277-286). Springer Singapore.
- Gemino, A., Horner Reich, B., & Serrador, P. M. (2021). Agile, traditional, and hybrid approaches to project success: is hybrid a poor second choice?. *Project management journal*, 52(2), 161-175.
- Geraldi, J., Maylor, H., & Williams, T. (2011). Now, let's make it really complex (complicated): A systematic review of the complexities of projects. *International journal of operations & production management*, 31(9), 966-990.
- Ghosh, A., Edwards, D. J., & Hosseini, M. R. (2021). Patterns and trends in Internet of Things (IoT) research: future applications in the construction industry. *Engineering, construction and architectural management*, 28(2), 457-481.
- Guest, G., Bunce, A., & Johnson, L. (2006). How many interviews are enough? An experiment with data saturation and variability. *Field methods*, 18(1), 59-82.
- Hayat, F., Rehman, A. U., Arif, K. S., Wahab, K., & Abbas, M. (2019, July). The influence of agile methodology (Scrum) on software project management. In *2019 20th IEEE/ACIS International Conference on Software Engineering, Artificial Intelligence, Networking and Parallel/Distributed Computing (SNPD)* (pp. 145-149). IEEE.
- Hayat, K., Hafeez, M., Bilal, K., & Shabbir, M. S. (2022). Interactive effects of organisational structure and team work quality on project success in project based non profit organisations. *iRASD Journal of Management*, 4(1), 84-103.
- Herrera, R. F., Mourgues, C., Alarcón, L. F., & Pellicer, E. (2019). An assessment of lean design management practices in construction projects. *Sustainability*, 12(1), 19.
- Lincoln, Y. S., & Guba, E. G. (1985). *Naturalistic inquiry*. sage.
- Patanakul, P., Shenhar, A. J., & Milosevic, D. Z. (2012). How project strategy is used in project management: Cases of new product development and software development projects. *Journal of Engineering and Technology Management*, 29(3), 391-414.
- Pinto, H. W., Kerzner, R. R., & Cleland, J. D. (2023). Exploring the implementation of agile project management in the United States construction industry: benefits, challenges, and success factors. *Journal of Entrepreneurship & Project Management*, 7(7), 11-23.
- Poth, C. N., & Shannon-Baker, P. (2022). State of the methods: Leveraging design possibilities of qualitatively oriented mixed methods research. *International Journal of Qualitative Methods*, 21, 16094069221115302.
- Raza, M. S., Tayeh, B. A., Aisheh, Y. I. A., & Maglad, A. M. (2023). Potential features of building information modelling (BIM) for application of project management knowledge areas in the construction industry. *Heliyon*, 9(9).
- Rigby, D. K., Sutherland, J., & Takeuchi, H. (2016). Embracing agile. *Harvard business review*, 94(5), 40-50.
- Said, A. A. M., Abd Karim, S. B., Yahya, I. A., Mohd, M. S., Danuri, F. A. M. R., Berawi, M. A., & Ismail, M. A. N. (2020). A review of integrated risk management infrastructure megaprojects in Malaysia. *MALAYSIAN CONSTRUCTION RESEARCH JOURNAL (MCRJ)*, 35.
- Serrador, P., & Turner, J. R. (2014). The relationship between project success and project efficiency. *Procedia-Social and Behavioural Sciences*, 119, 75-84.
- Sin, L. P., Choy, C. F., & Fung, W. P. (2020). Exploring the potential application of big data in the construction industry. *MALAYSIAN CONSTRUCTION RESEARCH JOURNAL (MCRJ)*, 228.

- Sithambaram, J., Nasir, M. H. N. B. M., & Ahmad, R. (2021). Issues and challenges impacting the successful management of agile-hybrid projects: A grounded theory approach. *International journal of project management*, 39(5), 474-495.
- Sohail, M., & Cavill, S. (2008). Accountability to prevent corruption in construction projects. *Journal of Construction Engineering and management*, 134(9), 729-738.
- Vijayasathy, L. E. O. R., & Turk, D. (2008). Agile software development: A survey of early adopters. *Journal of Information Technology Management*, 19(2), 1-8.
- Vrijhoef, R., & Koskela, L. (2005). Revisiting the three peculiarities of production in construction.
- Yaakob, A. M., Firzana, M. N., Kamarazaly, M. A., Hashim, N., & Seong, L. (2021). The concept of telecommuting lifestyle in the construction industry: Quantity surveyor's perspectives. *MALAYSIAN CONSTRUCTION RESEARCH JOURNAL (MCRJ)*, 12(1), 53.
- Yang, X., Yu, M., & Zhu, F. (2020). Impact of project planning on knowledge integration in construction projects. *Journal of construction engineering and management*, 146(7), 04020066.
- Zasa, F. P., Patrucco, A., & Pellizzoni, E. (2020). Managing the hybrid organisation: How can agile and traditional project management coexist?. *Research-Technology Management*, 64(1), 54-63.

SUSTAINABLE DESIGN CRITERIA FOR GREEN OFFICE BUILDINGS

Shalini Sanmargaraja¹, AbdulLateef Olanrewaju¹, Muhammad Tarique Lakhia¹, Chong Hooi Lim², Vignes Ponniah³ and Anselm Dass Mathalamuthu⁴

¹*Department of Construction Management, Faculty of Engineering and Green Technology, Universiti Tunku Abdul Rahman, Kampar, Malaysia*

²*School of Engineering, Vitrox College, Penang, Malaysia*

³*Department of Engineering, The Manchester College, United Kingdom*

⁴*School of Architecture, Faculty of Built Environment, Tunku Abdul Rahman University of Management and Technology, Kuala Lumpur, Malaysia*

Abstract

Cities serve as home to over 50% of the global population and are crucial to many of a nation's major economic endeavours. Significant rises in carbon dioxide emissions brought about by human activity have made the discrepancy between actual emissions and the target of reducing global warming even more pronounced. Office buildings are a major contributor to climate change; in response to this, there is an increase in demand for green office buildings. Therefore, this paper aims to report a study that explores the key sustainable design concepts that are incorporated into the designing stage of green office building projects. 143 construction stakeholders responded to the questionnaires, which were used as the data collection method. From the data analysis, it was found that energy efficiency is the fundamental design criterion used in designing green office buildings, followed by renewable energy integration, usage of sustainable materials, waste conversation, indoor air quality improvement, waste reduction, and biodiversity enhancement. All the parties involved in the construction process need to work together to accomplish the primary goals of green buildings, which are reducing energy use, avoiding or minimising greenhouse gas emissions, and protecting biodiversity and ecosystems. Much empirical research is needed to identify the obstacles that building owners must overcome to make their buildings sustainable to highlight the significance of lowering carbon footprints for Malaysia to become a low-carbon city by 2030.

Keywords: *Carbon Footprint; Energy Efficiency; Green Office; Well-Being; Workplace*

INTRODUCTION

Sustainable architecture is a key objective in modern design, emphasising a transition toward greener practices. Green design benefits the environment by reducing pollution, conserving resources, and minimising environmental harm. It also enhances occupant productivity while lowering energy and water costs (Asman, Kissi, Agyekum, Baiden, & Badu, 2019). Buildings impact both health and the environment, leading to the rise of "green building," which integrates resource efficiency, building performance, and occupant well-being throughout a structure's lifecycle (Ashmawy, Ragheb, Ragheb, & Marouf, 2024; Ayarkwa, Opoku, Antwi-Afari, & Li, 2022).

Liu et al. (2022) reported a more than 20-fold increase in global temperature, with projections indicating a rise of over 4°C by 2100, following an increase of over 1°C between 1880 and 2000. This raises concerns about ecosystems' ability to adapt. A major contributor to global warming is the greenhouse effect caused by industrial pollution, which increases atmospheric gas concentrations (Zhuan, Abidin, Mohd, & Darus, 2023). Reducing greenhouse gas (GHG) emissions is essential to mitigating climate change. Building design professionals are adopting sustainable strategies to conserve resources, prevent land contamination, and reduce energy consumption. Green building practices have become a key

approach to minimising construction's environmental impact (Kamath et al., 2019; Lakhia et al., 2024a).

Lakhia et al. (2024b) and Sanmargaraja et al. (2023) highlighted that "green building" aims to reduce environmental impacts throughout a building's life cycle. These buildings offer lower carbon emissions, energy savings, and greater economic benefits, making them more commercially valuable than conventional structures. As a result, green building may become essential in future urban architecture. Climate-resilient buildings use locally available recyclable materials and energy-efficient technologies to reduce costs and environmental effects. Green refurbishments also provide significant energy and carbon dioxide savings (Ayarkwa et al., 2022; Lakhia et al., 2023).

Green construction principles benefit both new and refurbished buildings, but tenants in multi-tenant office buildings may face challenges in implementing major retrofits (Gou, 2016). Additionally, research on green office building design criteria remains limited (Liu et al., 2022). In Malaysia, sustainable development has been promoted since the Ninth Malaysia Plan (2006–2010) and continued through the 11th Malaysia Plan (2016–2020). However, construction stakeholders have been less willing to adopt green practices, necessitating further research in this area (Saharuddin et al., 2023; Zainordin, Ismail, Toh, & Omar, 2023). This study investigates key design criteria to provide insights for developers, policymakers, and stakeholders in advancing green office buildings in Malaysia.

The World Green Building Council (2022) defines Green Building Rating Tools (GBRTs) as assessment systems that evaluate buildings' compliance with environmental sustainability standards. Various countries have developed their rating systems, such as LEED (U.S.), GBCC (Korea), BREEAM (U.K.), and Green Mark (Singapore). In Malaysia, available GBRTs include the Green Building Index (GBI), Green Real Estate (GreenRE), Green Mark, Green Star, MyCREST, and the Low Carbon City Framework (LCCF). These tools assist architects, engineers, and developers in designing energy-efficient buildings that reduce greenhouse gas emissions and protect biodiversity. However, Malaysia's green building movement is still in its early stages, requiring more incentives and awareness to promote sustainable practices (Lam, Wong, Tan, & Yap, 2024).

LITERATURE REVIEW

Olanrewaju, Sanmargaraja, Tan, and Chu (2024) outline seven key design principles for green office buildings: energy efficiency, sustainable materials, water conservation, waste reduction, indoor air quality improvement, renewable energy integration, and biodiversity enhancement. Achieving sustainability in the building industry requires a multi-disciplinary approach, focusing on energy efficiency, material optimisation, waste reduction, and pollution control (Akadiri, Chinyio, & Olomolaiye, 2012; Ardiani & Shateri, 2018). Enhancing current building practices can reduce environmental harm while maintaining functionality. A sustainable building design framework is shaped by three main objectives: resource conservation through efficient material and energy use, cost efficiency by balancing initial investments with long-term savings, and human-centred design that ensures comfort, resilience, and alignment with social, environmental, and economic sustainability principles.

Energy Efficiency

As the global population grows, so does energy demand, with buildings being a major contributor to energy consumption. Many existing structures worldwide, including in Malaysia, are not energy efficient. Additionally, Malaysia's reliance on fossil fuels for energy production contributes to greenhouse gas emissions and global warming (Goh, Zainordin, & Khoo, 2024). Energy efficiency is crucial in green building, as it helps minimise environmental, economic, and social impacts. Key strategies for sustainable buildings include building-integrated photovoltaic (BIPV) façades, PV installations, efficient lighting, resource-conscious building envelopes, wind turbine integration, energy-saving techniques, multi-objective search approaches, energy modelling, overall thermal transfer value calculations, innovative energy concepts (Hafez et al., 2023).

Improving energy performance in office spaces can begin with energy-efficient lighting. Indirect ambient lighting can replace direct lighting for better comfort, while sensors and control systems can automatically switch off electrical lights when sufficient daylight is available. Additionally, HVAC systems with automatic speed and pump controls can enhance efficiency, potentially reducing overall energy consumption by up to 40% (Pauzi, Yeow, Go, & Hadibarata, 2021). Energy efficiency also includes low-energy fixtures and renewable energy sources such as geothermal, hydropower, wind, and biomass, all of which contribute to sustainable building practices (Bashir, Ahmad, Sale, Abdullahi, & Aminu, 2016).

Use of Sustainable Materials

Natural architecture is inherently sustainable as it minimises reliance on modern energy-dependent technologies. Achieving optimal architectural performance in terms of cost, efficiency, and environmental impact requires thoughtful design, appropriate building materials, and viable construction techniques. Green building materials play a crucial role in sustainable architecture, especially given the construction sector's high consumption of natural resources. In the U.S., 60% of raw materials used in construction come from surplus and non-hazardous solid waste (Alhalabi, 2018; Neyastani, 2017). Utilising green materials such as reusable, recyclable, and energy-efficient ones helps to reduce energy waste in buildings. Additionally, recycling and reclaiming construction materials lower carbon dioxide emissions and energy consumption by minimising the need for raw material extraction, processing, and long-distance transportation (Altuhaf, Mahmoud, & Alaane, 2023).

Efficient engineering design and the use of waste materials should replace non-renewable building materials. Preference should be given to materials with minimal environmental impact, such as recycled content materials and engineered composite materials. These modern materials, including insulated concrete and composites, offer superior strength and durability compared to conventional materials. Additionally, high-recycled-content materials like recycled concrete aggregate, fly ash, and slag can be incorporated into construction. Reconditioned office furniture and chairs made from recycled materials also contribute to sustainability (Sitanggang & Susanto, 2017).

Water Conservation

Global water consumption is exceeding sustainable limits at an increasing rate, necessitating conservation efforts in workplaces through green office policies. Water can be collected, saved, filtered, and reused, making it a vital resource in green building design. Implementing dual plumbing systems to recycle water for toilet flushing or car washing can help conserve water throughout a building's lifespan. Additionally, emphasising the recycling and reuse of stormwater, greywater, and rainwater reduces unnecessary potable water consumption. Efficient stormwater management systems should align with natural hydrological processes, preserving stormwater retention, recharge systems, and water infiltration (Aroonsrimorakot, Laiphrakpam, & Korattana, 2019). A thorough analysis is required to identify cost-effective, time-efficient, and environmentally beneficial designs. Furthermore, preserving mature vegetation is crucial, as plants contribute to evapotranspiration, absorbing and redistributing up to 30% of precipitation on-site (Pauzi, Yeow, Go, & Hadibarata, 2021).

Waste Reduction

Reducing wastewater production in the workplace helps conserve natural resources and mitigate environmental pollution. Efforts to minimise office waste should include visible recycling centres, such as those in Singapore, and promoting reuse and recycling among employees. Educational materials like graphics, posters, and photographs on office walls or notice boards can help staff identify and sort waste correctly. Additionally, emails can be used to inform employees about recycling procedures. Contractors responsible for recycling should determine which plastic types are suitable for reprocessing (Aroonsrimorakot et al., 2019; Yuan & Tang, 2021).

Designers play a crucial role in minimising construction waste by implementing material standardisation, component prefabrication, and emerging BIM technology. Effective waste management begins with designing to minimise waste, while builders should consider material life cycles to optimise usage, longevity, demand, and cost. Reusing and recycling materials are cost-effective and sustainable strategies applicable to all economies and communities (Amaral et al., 2020). Plastics pose a significant challenge to sustainability, yet their affordability, versatility, and durability make them essential for industries like packaging. Despite being produced for over 60 years, plastic production has surged, reaching 8.3 billion metric tonnes, most of which are disposable and end up as waste (Nandy, Fortunato, & Martins, 2022).

Indoor Air Quality Improvement

Indoor environmental quality (IEQ) is essential for occupant health and productivity. Green buildings improve indoor air quality (IAQ), reducing sick building syndrome (SBS) caused by poor ventilation, high temperatures, and pollution. Good IEQ enhances decision-making and workplace comfort, ensuring no harmful pollutants are present (Felgueiras et al., 2023). However, balancing energy efficiency and maintaining optimal indoor conditions remains a challenge in green building design (Altomonte et al., 2019).

Buildings should incorporate ample windows and natural ventilation to enhance airflow. Thoughtfully placed ventilation systems ensure efficient heating, cooling, and pollutant filtration, providing clean air for occupants. Since air conditioning and ventilation account for over half of a building's energy use, an integrated control system is essential (Pauzi et al., 2021). Sustainable materials like low-VOC paints, recycled materials, and responsibly sourced timber further reduce environmental impact and improve indoor air quality (Khan et al., 2023).

Renewable Energy Integration

The ASEAN region receives 2000–2600 hours of sunlight annually, making solar energy a widely available renewable resource (Pauzi et al., 2021). Solar air conditioning, water heaters, and cells are common in green buildings, though low energy conversion rates remain a challenge. Further research is needed to enhance efficiency and expand integration with other green technologies (Pauzi et al., 2021). Additionally, renewable energy sources like wind, hydro, biomass, and geothermal are gaining attention for their environmental benefits and cost-saving potential in electricity generation (Ang et al., 2022).

Biodiversity Enhancement

Enhancing biodiversity through green building design is vital for sustainable urban development. Green roofs and walls provide habitats for urban wildlife, promoting ecological connectivity (Mayrand & Clergeau, 2018). Integrating nature-based solutions, such as urban green spaces, rain gardens, and vegetated facades, enhances urban resilience while supporting biodiversity (Francesco, 2024). Using native plants in green buildings benefits local ecosystems, strengthening the relationship between human settlements and nature for long-term sustainability (Francesco, 2024).

METHODOLOGY

This study gathered data from the International Architecture, Interior Design, and Building Exhibition (ARCHIDEX) 2024, held at the Kuala Lumpur Convention Centre (KLCC) from July 2–5. As Malaysia's largest architectural exhibition, ARCHIDEX 2024 spanned 26,000 square meters, hosting 700 local and international exhibitors across 1,500 booths. The event attracted approximately 40,000 visitors from over 100 countries, serving as a platform for industry professionals to explore emerging trends and innovations in architecture and design.

The study employed a purposive sampling technique to distribute the questionnaire, as described by Olanrewaju, Idrus, and Khamidi (2011), which is effective when researchers aim to select participants with specific characteristics. The questionnaire focused on key sustainable design aspects, including energy efficiency, biodiversity enhancement, indoor air quality, water conservation, sustainable materials, waste reduction, and site sustainability. The survey targeted ARCHIDEX participants from various sectors, including architecture, engineering, quantity surveying, contracting, material supply, government agencies, private

companies, and property development. A total of 143 participants responded, and Kuder-Richardson reliability analysis was conducted to ensure data consistency.

FINDINGS AND DISCUSSION

The findings and discussion session are divided into two sections which are the respondents' demography and sustainable design principles for green office buildings.

Respondents' Demography

Figure 1 indicates that most survey participants are from Malaysia, Pakistan, the United Arab Emirates, Taiwan, Singapore, Hong Kong, Australia, Indonesia, and the United States of America, following in order of participation. In addition, the results also show that 74.1% of respondents are from Southeast Asia, with 12.6% coming from South Asia, 7% from the Middle East, 4.9% from Eastern Asia, and roughly 1.4% from the Western Region.

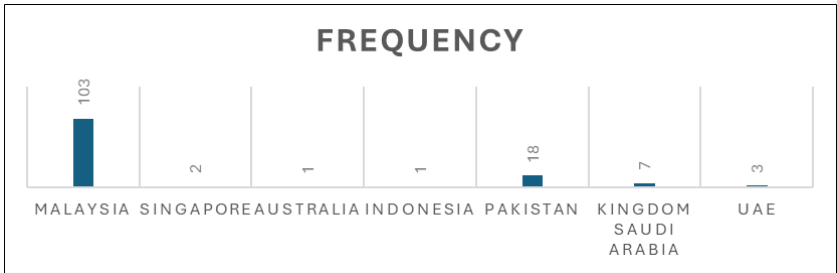


Figure 1. Respondent's Nationality

Table 1 shows that almost 49.7% of the overall respondent population has an engineering background, followed by 16.8% with an architecture background, 32.9% with a construction background, and roughly 0.7% with a background in another discipline.

Table 1. Respondent's Academic Background

Background	Frequency
Quantity surveying	9
Construction management	10
Architecture	24
Engineering	69
Facility management	5
Building surveying	13
Building technology	9
Fresh graduate in civil engineering	1
Bachelor of arts	1
Environmental engineer	1
Others	1

More than 34% of the respondents have 5 to 10 years of work experience, followed by 24.5% who have less than 5 years, 24.5% who have 11 to 15 years, 11.2% who have 16 to 20 years, and 5.6% who have more than 20 years (Figure 2).

Most (45.5%) of the respondents are from consulting firms, 9.1% are contractors, 13.3% are suppliers of materials, and 32.1% are from other organisations (Table 2).

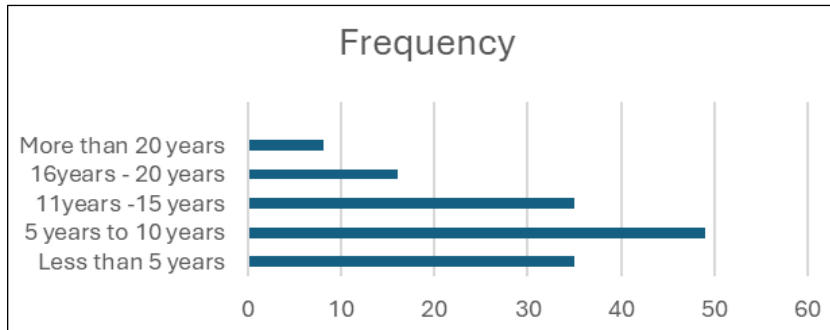


Figure 2. Respondent's Work Experience (Years) in The Construction Industry

Table 2. Respondent's Type of Organisation

Organisation	Frequency
Consulting architecture firm	39
Consulting engineering firm	22
Consulting quantity surveying firm	3
Contractors	13
Material suppliers	19
Public- government	3
Private company	31
Property developer	2
Teaching and research	1
Software developer	1
Sustainability consulting	1
Others	8

Sustainable Design Principles for Green Office Buildings

The results demonstrate a strong level of internal consistency among the seven items in Table 3 and Table 4, with a Cronbach's Alpha of 0.7 or higher, which is considered acceptable for measuring the design criteria for green buildings. Water Conservation and Waste Reduction contribute significantly to scale reliability, whereas Energy Efficiency and Renewable Energy Integration have lower contributions but remain within acceptable limits. Notably, removing Waste Reduction would decrease Cronbach's Alpha to 0.688, highlighting its critical role in maintaining scale reliability.

Removing items such as Energy Efficiency or Renewable Energy Integration would only slightly improve reliability, justifying their inclusion for comprehensive content coverage. The Intraclass Correlation Coefficient (ICC) indicates moderate reliability for individual items, suggesting some variability in single-item ratings, which is expected in multi-item scales.

The average ICC measure of 0.760 indicates good reliability, aligning with Cronbach's Alpha and confirming the consistency of the green building design criteria. The significant F-test validates that the observed ICC is not random but reflects true consistency. Overall, the scale reliably assesses the perceived importance of design criteria, with Waste Reduction and Water Conservation emerging as the strongest indicators.

Table 3. Item-Total Statistics

	Scale Mean If Item Deleted	Scale Variance If Item Deleted	Corrected Item-Total Correlation	Cronbach's Alpha If Item Deleted
Energy efficiency	3.504	3.717	0.367	0.752
Water conservation	3.636	3.275	0.557	0.714
Use of sustainable materials	3.6084	3.451	0.459	0.735
Waste reduction	3.769	3.052	0.662	0.688
Indoor air quality improvement	3.734	3.380	0.456	0.736
Renewable energy integration	3.587	3.582	0.388	0.749
Biodiversity enhancement	3.923	3.410	0.457	0.736

Table 4. Intraclass Correlation Coefficient

	Intraclass Correlation	95% Confidence Interval		F Test with True Value 0			
		Lower Bound	Upper Bound	Value	df1	df2	Sig
Single measures	0.312a	0.246	0.388	4.173	142	852	0.000
Average measures	0.760c	0.695	0.816	4.173	142	852	0.000

Two-way mixed effects model where people effects are random and measures effects are fixed.

a. The estimator is the same, whether the interaction effect is present or not.

b. Type C intraclass correlation coefficients using a consistency definition. The between-measure variance is excluded from the denominator variance.

c. This estimate is computed assuming the interaction effect is absent because it is not estimable otherwise.

Table 5 indicates that 18.4% of respondents consider energy efficiency the most critical sustainable design criterion for green office buildings. Energy efficiency reduces energy demand for services like lighting and HVAC, reinforcing sustainability efforts. Chen and Abu al-Rejal (2015) highlight energy efficiency as a key strategy for lowering greenhouse gas emissions. Historical examples include U.S. energy-saving measures introduced during the 1970s energy crises and Nigeria's initiatives to promote efficiency in housing, transportation, and industrial sectors through collaboration with research institutions (Chen & Abu al-Rejal, 2015).

Table 5. Sustainable Design Principles for Green Office Building Projects During The Design Phase

Principle	Frequency
Energy efficiency	113
Renewable energy integration	101
Use of sustainable materials	98
Water conservation	94
Waste reduction	75
Biodiversity enhancement	53

The International Energy Agency (IEA) projects that global building energy consumption will rise from 33% in 2017 to 55% by 2050. Implementing simple design, construction, and operational strategies can enhance energy performance. However, in many emerging nations, sustainability goals are often overlooked, leading to increased energy consumption. Reducing electricity use can also lower CO₂ emissions from power generation. Stakeholders in the building sector increasingly acknowledge that monitoring sustainability criteria can significantly mitigate climate change impacts (Nkini, Nuyts, Kassenga, Swai, & Verbeeck, 2023).

The data indicate that 16.5% of respondents consider renewable energy integration the second most important sustainable design feature for green office buildings. Incorporating renewable sources like solar, wind, geothermal, and biomass into a building's lifecycle can reduce reliance on fossil fuels and enhance environmental sustainability (Chen et al., 2024). Historically, passive solar design influenced building orientation by optimising natural ventilation and sunlight.

Smart buildings utilise advanced sensors, controls, and systems to dynamically adapt to their environment and occupants' needs, enhancing energy efficiency (Orikpete, Ikemba, & Ewim, 2023). This integration of technology, architecture, and energy management reduces waste and allows excess energy to be returned to the grid. Energy efficiency is not just about consuming less energy but using it optimally to minimise waste and maximise utility.

Survey results indicate that respondents ranked the use of sustainable materials as the third most important factor in green office building design. Sustainable materials enhance building performance, improve occupant comfort, and support better health outcomes (Sheth, 2016). Green buildings can reduce indoor temperatures by 5°C in summer and remain 2°C warmer in winter, leading to a 30% reduction in energy consumption compared to conventional buildings (Patel & Patel, 2021).

Survey respondents ranked water conservation as the fourth most important factor in green office building design. With the rising global population, freshwater demand is increasing, and the United Nations projects that by 2050, up to 5 billion people could face water shortages. To address this, it is crucial to protect water resources and prevent pollution (Das, Bera & Moulick, 2015; Basil, Agu & Agbo, 2022). Water conservation strategies include using water-efficient fixtures such as ultra-low flushing toilets, bidets, and low-flow showerheads, as well as dual plumbing systems that recycle water. Other methods include rainwater harvesting and greywater recycling (Das, Bera & Moulick, 2015; Basil, Agu & Agbo, 2022).

Indoor air quality (IAQ) improvement was ranked as the next important design principle by 13.0% of respondents. Senitkova (2017) highlighted the growing recognition of IAQ as a key factor affecting occupants' health and well-being. Proper ventilation is essential, as poorly ventilated buildings are more prone to indoor air quality issues. Ensuring sufficient outdoor air supply can help reduce indoor pollutant exposure. Wu et al. (2021) noted that thermal environment and air quality significantly influence human responses, yet post-assessments of IAQ in office buildings, particularly green office buildings, remain limited.

Waste reduction was identified as an important design principle by 12.2% of respondents. Akdağ and Beldek (2017) emphasised that managing construction waste alone is insufficient; material design should also be considered during the design phase to optimise energy savings. Green building design can lead to significant reductions, including 30% energy savings, 35% carbon savings, 30–50% water savings, and 50–90% cost savings. Omeje and Okanya (2024) highlighted the need to replace the traditional cradle-to-grave approach with a cradle-to-cradle system, allowing materials to be repurposed rather than discarded after a single use.

Biodiversity enhancement was the least prioritised design principle, selected by 8.6% of respondents. Incorporating green building elements, such as vegetation, improves indoor air quality, reduces carbon emissions, and enhances occupant satisfaction. Green building assessment tools help developers and consultants create sustainable buildings that conserve energy, mitigate greenhouse gas emissions, and protect biodiversity (Lam et al., 2024). Additionally, other important design principles include natural lighting, ventilation, green roofs, smart building technologies, and transportation alternatives (Ashmawy et al., 2024).

CONCLUSIONS

This study explored key sustainable design concepts in green office building projects, highlighting energy efficiency as the top priority due to high electricity consumption during operations. Renewable energy integration and sustainable materials ranked next, while waste reduction and biodiversity enhancement received less emphasis. Achieving green building goals by reducing energy use, lowering greenhouse gas emissions, and preserving ecosystems requires collaboration among designers, contractors, developers, policymakers, and government authorities.

Designers should implement holistic strategies, integrating passive and active design techniques, renewable energy, and climate-responsive solutions to reduce energy consumption, particularly in air conditioning. Policymakers must enforce energy efficiency regulations and offer incentives, such as tax waivers, to encourage sustainable practices. Despite challenges like stakeholder reluctance during data collection, further research is needed to overcome barriers and support Malaysia's goal of achieving low-carbon city status by 2030. Future studies should focus on interviews with Green Building Certified building owners to understand certification challenges.

ACKNOWLEDGEMENTS

The research was supported by the Ministry of Higher Education (MoHE), through the Fundamental Research Grant Scheme (FRGS/1/2021/TK0/UTAR/02/34).

REFERENCES

- Akadiri, P.O., Chinyio, E.A. and Olomolaiye, P.O. (2012). Design of a Sustainable Building: A Conceptual Framework for Implementing Sustainability in the Building Sector. *Buildings*. 2:126-152.

- Akdağ H.C. and Beldek T. (2017). Waste Management in Green Building Operations Using GSCM. *International Journal of Supply Chain Management*. 6(3):174-80.
- Alhalabi Z.S. The Study of the Principles of Green Office Building Design. *Интернаука*. 2018 (12):71-72.
- Altomonte S., Schiavon S., Kent M.G. and Brager G. (2019). Indoor Environmental Quality and Occupant Satisfaction in Green-Certified Buildings. *Building Research & Information*. 47(3):255-274.
- Altuhaf A.A., Mahmoud K.F. and Alaane T.I. (2023). Strategies of Employing the Principles of Sustainable Architecture in Modern Buildings. *International Journal of Sustainable Development & Planning*. 18(4):1007-1015.
- Amaral R.E., Brito J., Buckman M., Drake E., Ilatova E., Rice P., Sabbagh C., Voronkin S. and Abraham Y.S. (2020). Waste Management and Operational Energy for Sustainable Buildings: A Review. *Sustainability*. 12(13):5337:1-21.
- Ang, T.Z., Salem, M., Kamarol, M., Das, H.S., Nazari, M.A. and Prabakaran, N. A (2022). Comprehensive Study of Renewable Energy Sources: Classifications, Challenges and Suggestions. *Energy Strategy Reviews*. 43 (100939):1-27.
- Ardiani, M. and Shateri, M. (2018). Conceptual Framework for Sustainable Design. *Specialty Journal of Architecture and Construction*. 4(2):15-24.
- Aroonsrimorakot S., Laiphrakpam M. and Korattana C. (2019). Green Office, Its Features and Importance for Sustainable Environmental Management: A Comparative Review in Search for Similarities and Differences. *Interdisciplinary Research Review*. 14(5): p. 31-38.
- Ashmawy R.A., Ragheb A.A., Ragheb G. and Marouf O. (2024). Sustainable Design Principles for Green Office Buildings: A Comprehensive Review. *International Journal of Sustainable Development & Planning*. 19(6):2069-2077.
- Asman G.E., Kissi E., Agyekum K., Baiden B.K. and Badu E. (2019). Critical Components of Environmentally Sustainable Buildings Design Practices of Office Buildings in Ghana. *Journal of Building Engineering*, 26 (100925):1-11.
- Ayarkwa J., Opoku D.G., Antwi-Afari P. and Li R.Y. (2022). Sustainable Building Processes' Challenges and Strategies: The Relative Important Index Approach. *Cleaner Engineering and Technology*. 7(100455):1-9.
- Bashir F.M., Ahmad M.H, Sale A.U., Abdullahi A. and Aminu A.S. (2016). Fundamental Elements for Sustainable Design. *Indian Journal of Science and Technology*. 9(46):1-10.
- Basil A.A., Agu A.O. and Agbo C.E. (2022). Water Use Efficiency and Conservation in Green Buildings. *Journal of Environmental Management and Safety*. 13(1):67-78.
- Chen L., Hu Y., Wang R., Li X., Chen Z., Hua J., Osman A.I., Farghali M., Huang L., Li J. and Dong L. (2024). Green Building Practices to Integrate Renewable Energy in the Construction Sector: A Review. *Environmental Chemistry Letters*. 22(2):751-784.
- Chen M.A. and Abu al-Rejal H.M. (2015). Energy Efficiency in Green Building to Achieve Company Sustainability. *Proceedings of Symposium on Technology Management and Logistics (STMLGoGreen)*, Malaysia, 501-510.
- Das O., Bera P. and Moulick S. (2015). Water Conservation Aspects of Green Buildings. *International Journal Research Engineering and Technology*. 4(25):75-79.
- Felgueiras F., Mourão Z., Moreira A. and Gabriel M.F. (2023). Indoor Environmental Quality in Offices and Risk of Health and Productivity Complaints at Work: A Literature Review. *Journal of Hazardous Materials Advances*. 10(100314):1-11.

- Francesco, S. (2024). Nature-Based Solutions to Enhance Urban Resilience in the Climate Change and Post-Pandemic Era: A Taxonomy for the Built Environment. *Buildings*. 14(7):1-20.
- Goh, K.C., Zainordin, N. and Khoo, S.L. (2024). Retrofitting in Existing Buildings in Malacca, Malaysia. *Malaysian Construction Research Journal (MCRJ)*. 21(1): 179-193.
- Gou Z. (2016). Green building for office interiors: Challenges and opportunities. *Facilities*. 34(11/12):614-29.
- Hafez F.S., Sa'di B., Safa-Gamal M., Taufiq-Yap Y.H., Alrifay M., Seyedmahmoudian M., Stojcevski A., Horan B. and Mekhilef S. (2023). Energy Efficiency in Sustainable Buildings: A Systematic Review with Taxonomy, Challenges, Motivations, Methodological Aspects, Recommendations, and Pathways for Future Research. *Energy Strategy Reviews*. 45(101013):1-30.
- Kamath S., Kamath R., D., Souza B., Soman B., Raj A. and Kamath L. (2019). Green Buildings: Sustainable Construction Principles. *International Journal of Civil Engineering and Technology*. 10(1):1882-1892.
- Khan M.M, Bashir M.T., Sikandar M.A., Alrowais R., Syed S., Zahid N., Abbas I.M., Khan W.M. and Zawar A. (2023). Green Buildings and Indoor Air Quality: A Health and Technological Review. 1-18.
- Lakhiar M.T., Sanmargaraja S., Olanrewaju A., Lim C.H., Ponniah V. and Mathalamuthu A.D. (2024a). Evaluating and Comparing Objective and Subjective Thermal Comfort in a Malaysian Green Office Building: A Case Study. *Case Studies in Thermal Engineering*. 60(104614):1-20.
- Lakhiar M.T., Sanmargaraja S., Olanrewaju A., Lim C.H., Ponniah V. and Mathalamuthu A.D. (2024b). Energy Retrofitting Strategies for Existing Buildings in Malaysia: A Systematic Review and Bibliometric Analysis. *Environmental Science and Pollution Research*. 31(9):12780-12814.
- Lakhiar M.T., Sanmargaraja S., Olanrewaju A., Lim C.H., Ponniah V. and Mathalamuthu A.D. (2023). Passive Design Approach to Improve Energy Efficiency for Office Building. in 13th Annual International Conference on Industrial Engineering and Operations Management. Philippines, 1-13.
- Lam W.H., Wong C.F., Tan O.K. and Yap B.H. (2024). Study on the Benefits of the Implementation of Green Building Rating in Malaysia. *The Journal of The Institution of Engineers Malaysia*. 85(1):17-24.
- Liu T., Chen L., Yang M., Sandanayake M., Miao P., Shi Y. and Yap P.S. (2022). Sustainability Considerations of Green Buildings: A Detailed Overview on Current Advancements and Future Considerations. *Sustainability*. 14(21), 14393:1-23.
- Mayrand, F. and Clergeau, P. (2018). Green Roofs and Green Walls for Biodiversity Conservation: A Contribution to Urban Connectivity? *Sustainability*. 10(4):1-13.
- Nandy S, Fortunato E. and Martins R. (2022). Green Economy and Waste Management: An Inevitable Plan for Materials Science. *Progress in Natural Science: Materials International*. 32(1):1-9.
- Neyestani B. (2017). A Review on Sustainable Building (Green Building). Available at SSRN 2968885.
- Nkini S., Nuyts E., Kassenga G., Swai O. and Verbeeck G. (2023). Comparative Analysis of the Energy Performance in Green and Non-Green Office Buildings in Dar Es Salaam, Tanzania. *Energy and Buildings*. 293(113202):1-25.

- Omeje H.O. and Okanya V.A. (2024). Waste Management for Sustainability in the Built Environment. Noguchi, M. (eds) In Prefabricated Construction for Sustainability and Mass Customization.
- Orikpete O.F, Ikemba S. and Ewim D.R. (2023). Integration of Renewable Energy Technologies in Smart Building Design for Enhanced Energy Efficiency and Self-Sufficiency. *The Journal of Engineering and Exact Sciences*. 9(9):1-13.
- Olanrewaju, A., Sanmargaraja, S., Tan, S.Y. and Chu, H.C., 2024. Evaluation of the Benefits of The Implementation of Digital Twins in Sustainable Construction Projects. *Proceedings of the 12th World Construction Symposium, Sri Lanka*, 446-457.
- Olanrewaju A., Idrus A. and Khamidi F.M. (2011). Investigating Building Maintenance Practices in Malaysia: A Case Study. *Structural Survey*. 29(5):397-410.
- Patel P. and Patel A. (2021). Use of Sustainable Green Materials in Construction of Green Buildings for Sustainable Development. In *IOP Conference Series: Earth and Environmental Science*, IOP Publishing. India, 1-10.
- Pauzi N.N., Yeow P.K., Go Z.H. and Hadibarata T. (2021). Overview on the Implementation of Green Building Design in Malaysia, Singapore, Vietnam and Thailand. *International Journal of Advanced Research in Technology and Innovation*. 3(3):35-48.
- Sanmargaraja S., Olanrewaju A., Lakhier M.T., Lim C.H., Ponniah V. and Mathalamuthu A.D. (2023). A Review of How Occupant Behaviour Determines the Energy Efficiency of Green Buildings: A Case of Office Buildings. in *13th Annual International Conference on Industrial Engineering and Operations Management*. Philippines, 1-11.
- Saharuddin, S., Hassan, N.F., Noor, S.N.A.M., Yusof, N.F.M. and Dollah, N.A.A. (2023). Critical Challenges Towards Effectuating Sustainable Construction: A Systematic Review. *Malaysian Construction Research Journal (MCRJ)*. 19(2): 159-169.
- Sheth, K. N. (2016). Sustainable building materials are used in green buildings. In *9th International Conference on Engineering and Business Education (ICEBE) & 6th International Conference on Innovation and Entrepreneurship (ICIE)*. China, 135-143.
- Sitanggang Y. and Susanto D. (2017). The Impact of Green Building Approach to Office Property Value. In *IOP Conference Series: Earth and Environmental Science*. IOP Publishing. Indonesia, 1-6.
- Šenitková I.J. (2017). Indoor Air Quality–Buildings Design. *MATEC Web of Conferences*. Europe, 1-6.
- Wu P., Fang Z., Luo H., Zheng Z., Zhu K., Yang Y. and Zhou X. (2021). Comparative Analysis of Indoor Air Quality in Green Office Buildings of Varying Star Levels Based on the Grey Method. *Building and Environment*. 195(107690):1-10.
- Yuan, Q.H, and L. Y. Tang. (2021). The Principles in Green Design. In *E3S Web of Conferences*. China. 1-6.
- Zainordin, N., Ismail, S., Toh, T.C. and Omar, A.F. (2023). Sustainable Development from the Perspective of Educational Goals. *Malaysian Construction Research Journal (MCRJ)*. 18(1): 235-251.
- Zhuan, T.X., Abidin, N.I., Mohd, S. and Darus, N. (2023). Sustainable Practices of Contractors for Enhancing Competitiveness in Construction. *Malaysian Construction Research Journal (MCRJ)*. 20(3): 13-26.

This page intentionally left blank

ASSESSING ARTIFICIAL INTELLIGENCE (AI) ADOPTION LEVELS IN THE CONSTRUCTION INDUSTRIES OF ZAMBIA AND KENYA

Maria Achieng Akulu¹, Charles Kahanji¹, Rahimi A. Rahman^{2,3} and Erastus Misheng'u Mwanaumo^{4,5}

¹Department of Civil and Environmental Engineering, University of Zambia, Lusaka, Zambia

²Faculty of Civil Engineering Technology, Universiti Malaysia Pahang Al-Sultan Abdullah, Kuantan, Malaysia

³Faculty of Graduate Studies, Daffodil International University, Dhaka, Bangladesh

⁴Directorate of Research and Development, University of Zambia, Lusaka, Zambia

⁵Faculty of Engineering, Built Environment and Information Technology, Walter Sisulu University, Eastern Cape, South Africa

Abstract

The construction industry plays a crucial role in economic growth, significantly contributing to revenue generation, capital formation, and job creation. These elements are vital for enhancing a nation's Gross Domestic Product (GDP) and overall development. The integration of Artificial Intelligence (AI) tools in construction presents a promising opportunity to optimise project management and address existing challenges. However, in Zambia and Kenya, the adoption of AI in the construction sector remains largely underdeveloped compared to other industries such as transportation, healthcare, banking, and logistics. A questionnaire survey was conducted with 162 respondents who were among the key players in the construction industry. The data was analysed using both descriptive and inferential statistical methods. The standard deviation values for the responses ranged between 0.52 and 1.44, and the mean values fell within the range of 2.67 to 4.76, indicating varying degrees of response consistency. AI tools have been widely adopted through BIM applications, with average mean ranks between 3.51 and 3.44. In contrast, tools such as neural networks have been the least popular AI tools, achieving a mean rank of 1.85. These findings revealed that, despite rapid urbanisation and increasing demand for infrastructure, AI adoption in construction remains limited, with most applications restricted to the design and planning stages. Additionally, no significant differences were found in AI adoption levels between Zambia and Kenya.

Keywords: *Artificial Intelligence (AI); AI Adoption; Gross Domestic Product (GDP); Construction Industry; Design and Planning*

INTRODUCTION

The construction sector is essential, especially in developing regions, and plays a crucial role in promoting and enhancing sustainability (Lima, Trindade, Alencar, Alencar, & Silva, 2021). The construction sector is characterised by complex operations, resource-intensive processes, and a substantial impact on both the built environment and the broader economy (Abioye et al., 2021). The construction industry in Africa has been steadily expanding, propelled by growing urbanisation, increased infrastructure demands, and economic development (Ramachandran, 2021). In Zambia and Kenya, construction activities have become central to their respective national agendas, driving substantial investments (Mitlin, 2021). The construction industry in most nation-states globally has not fully harnessed the potential of Artificial Intelligence (AI), trailing behind other sectors such as business services, manufacturing, finance, transport, and utilities (Adedeji Olawale et al., 2023). The delayed adoption and integration of AI technologies in construction highlight numerous potential challenges, including the economic costs of implementation, acceptance of new technologies, heightened requirements for construction equipment and processes, a knowledge deficit, and

individual reluctance (Gurgun, Koc, & Kunkcu, 2024). Basaif et al. (2020) conducted a study on AI awareness in the Malaysian construction industry and found that awareness was generally low. Most practitioners lacked AI knowledge, had no formal training, and did not use AI for risk analysis. Additionally, companies provided limited AI training, hindering its adoption in project management.

AI tools are advanced information technology geared towards enhancing the effectiveness of construction management by supporting sustainable practices (Wamba-Taguimdje, Fosso Wamba, Kala Kamdjoug, & Tchatchouang Wanko, 2020), resource efficiency, and minimising waste in construction and infrastructure development (Ihsanullah, Alam, Jamal, & Shaik, 2022; Huang & Koroteev, 2021). The increasing adoption of various technologies has facilitated the digitisation, automation, and seamless integration of construction processes across all stages of the construction value chain. Both countries are emphasising the importance of regulatory frameworks and quality standards to ensure the durability and sustainability of infrastructure. The integration of these technologies not only supports the economic growth of Zambia and Kenya but also aligns with global trends toward smarter, more resilient urban development (Tanui & Tembo, 2023).

The incorporation of Artificial Intelligence (AI) into the construction industry has garnered substantial attention in recent years due to its potential to transform various aspects of construction project management (Zhu, Hwang, Ngo, & Tan, 2022). AI technologies such as machine learning, predictive analytics, and robotics offer significant advantages in automating routine tasks, optimising resource allocation, and enhancing decision-making processes (Zhang, Shi, & Yang, 2020). Big data analytics is another area that has employed AI tools, which have been used in the construction industry to enhance project efficiency by analysing vast data from design, finance, materials, and workforce management (Sin, Choy, & Fung, 2020). This growing interest stems from the need to address common challenges in the construction sector, including project delays, cost overruns, and quality deficiencies, which are prevalent in many developing countries, including Zambia and Kenya (Kumar & Kumari, 2025).

Post-COVID-19 pandemic, the construction industry has strived to adopt technologies to enhance productivity, improve site safety, and streamline project management (Kamarazaly, Chin, Ling, Au, & Hoong, 2024). However, these efforts have faced significant challenges, including inflated costs, limited skilled labour, and resistance to change, slowing the pace of digital transformation. Kong and Jie (2024) highlighted that while digital transformation increases productivity, cost savings, and safety at construction sites in Malaysia, progress is hindered by high technology costs, concerns about low return on investment, and a shortage of skilled labour and digital awareness. Similarly, Raslim, Ern, Liyana and Ariffin (2024) found that although smart wearables have the potential to enhance safety on construction sites, their adoption in Malaysia remains low, primarily due to inflated costs, a lack of skilled workers, and limited awareness. The success of such technologies depends on leadership support, adequate financial resources, and a culture of innovation. Additionally, Basaif et al. (2020) identified a research gap in examining the impact of organisational culture on the adoption of artificial intelligence for risk analysis within the Malaysian construction industry, specifically focusing on certain categories of practitioners.

According to the Government AI Readiness Index, Kenya ranks 101st and Zambia 143rd globally, indicating a moderate level of readiness for AI adoption (Oxford Insights, 2023). Despite this, AI integration is notably absent in the construction industries of these countries. Despite the growing recognition of AI's potential, the actual integration of these technologies within the construction sectors of Zambia and Kenya remains limited. Therefore, this study aims to assess the level of AI adoption in the construction industry of Zambia and Kenya, exploring the underlying factors influencing this adoption. By employing a qualitative, multiple case study approach, the research sought to uncover insights into the current state of AI integration, the challenges faced, and the opportunities available for enhancing technological adoption in the sector.

MATERIALS AND METHODS

The research design adopted for this study was a mixed-methods approach, incorporating both quantitative and qualitative data collection methodologies.

Study Area

The study was conducted in the Zambian and Kenyan construction industries, the investigation delved into construction projects across various regions, urban and rural settings, and different types of developments, including residential, commercial, and infrastructure projects.

Study Population

The study population is defined as a set of cases, determined, limited, and accessible, that will constitute the subjects for the selection of the sample and must fulfil several characteristics and distinct criteria (Hossan, Dato' Mansor, & Jaharuddin, 2023). The study population encompassed a broad spectrum of professionals and stakeholders involved in the construction sector of Zambia and Kenya.

Study Sample

As highlighted by Hossan et al. (2023), a representative sample ensures that the results of a study can be extrapolated to the entire population. Additionally, Mulisa (2022) emphasises the importance of sampling in providing accurate estimations and predictions about population characteristics. The choice of sampling method significantly impacts the quality and reliability of the research outcomes, making it a fundamental aspect of research design and methodology (Zickar & Keith, 2023). The study sample for the study entailed all the construction players in Kenya and Zambia, who are in diverse construction landscapes, to ensure a comprehensive representation of these countries. Yamane Sample Size Formula (Aliu, Oke, & Oni, 2024) for sample size determination was employed to ensure that the sample accurately represents the population.

$$n = \frac{N}{1 + [N(e^2)]}$$

where $e = \pm 8\%$ sampling error = 0.08

N= 143,860

$$n = \frac{143860}{1+[143860(0.08^2)]} = 156.08 = 157 \text{ construction players}$$

Sampling Techniques

Sampling entails choosing a subset from the study population to estimate or predict information about the entire population (Mulisa, 2022).The sampling method applied was convenience sampling, a non-probabilistic technique that collects data from accessible members of the population who are willing to participate. This method was appropriate for studies with time limitations and where other resources may not be available. Additionally, the snowball sampling method was also utilised to target accessible construction projects. This approach involved identifying initial participants who then referred other relevant stakeholders, thereby expanding the sample size (Ojo, Ajayi, Owolabi, Oyedele, & Akanbi, 2022).

Data Collection, Analysis Instruments and Procedure

A questionnaire survey technique was used to collect preliminary data from a targeted group of respondents, focusing on managers at higher and middle levels possessing substantial organisational knowledge and experience. This method was chosen for its appropriateness in allowing respondents sufficient time to consider and respond to questions, thereby facilitating convenient data analysis through statistical methods. The collected data was analysed using several statistical techniques to understand the relationships between variables and achieve the study's objectives.

RESULTS AND DISCUSSION

Questionnaire Survey

A total of 162 responses were gathered through a questionnaire administered using Google Forms. The data was downloaded in Excel format to a password-protected personal computer for analysis. The study focused on construction sector professionals in Zambia and Kenya. Table 1 and Figure 1a show the distribution of the participants per country under study. Table 2 and Figure 1b show the sectors where the respondents work.

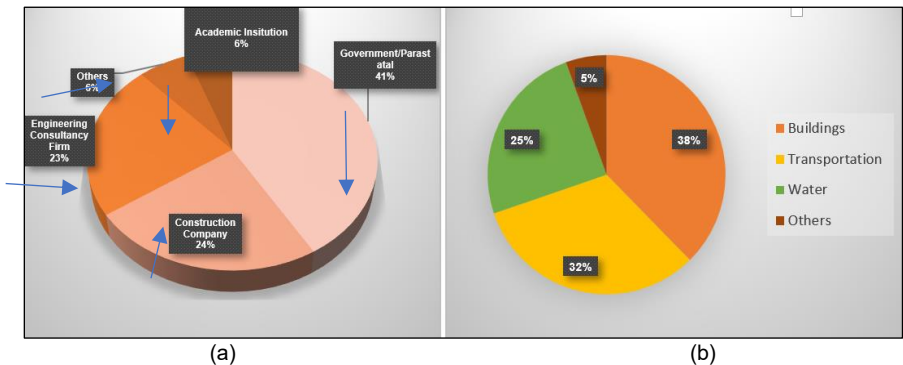


Figure 1. (a) Type of Establishment of Respondents (b) The Industry Sub-Sectors of Respondents

Table 1. Demographics of Respondents

Background Information		Frequency	Percentage of Frequency
Nationality	Zambian	44	27.2
	Kenyan	118	72.8
Gender	Male	132	81.5
	Female	30	18.5
Age	18 to 30	80	49.4
	31 to 40	72	44.4
	41 to 50	7	4.3
	51 to 60	2	1.3
	Above 60	1	0.6
Education Level	Diploma	9	5.6
	Bachelor's	110	67.9
	Master's	41	25.3
	Doctorate's	2	1.2
Title	Architect	5	3.1
	Engineer	118	72.8
	Contractor	9	5.6
	Quantity surveyor	5	3.1
	Project/construction manager	18	11.1
	Operations officer	6	3.7
	Other	1	0.6
Experience	Less than 2 years	21	13
	2 to 5 years	66	40.7
	5 to 10 years	51	31.5
	10 to 20 years	19	11.7
	Above 20 years	5	3.1

Table 2. Construction Sub-Sectors and Establishments

Background Information		Frequency	Percentage of Frequency
Type of Establishment	Government agency/ parastatal	67	41.4
	Engineering consultancy firm	37	22.8
	Construction company	39	24.1
	Academic institution	9	5.5
	Other	10	6.2
Construction Sub-Sector	Water sector	40	24.7
	Transportation sector	52	32.1
	Buildings	61	37.6
	Other	9	5.6

Level of Adoption of AI in The Construction Sector

Participants were asked to respond using a 5-point Likert scale, with mean score values interpreted as follows: $4.3 < \text{mean score} \leq 5$ indicated strongly agree, $3.5 < \text{mean score} \leq 4.3$ indicated agree, $2.6 < \text{mean score} \leq 3.5$ indicated undecided, $1.8 < \text{mean score} \leq 2.6$ indicated disagree, and $0 < \text{mean score} \leq 1.8$ indicating strongly disagree. The findings from the study, as detailed in Table 3 and Figure 2, revealed a mixed response among participants regarding the awareness and adoption of Artificial Intelligence (AI) in the construction industry. The standard deviation values were between 0.52 and 1.44. The mean of the variables varied between 2.67 and 4.76, indicating that the average response was between undecided and strongly agree on a five-point Likert scale.

AI awareness within the construction industry is notably high, evidenced by a coefficient of variation (COV) of just 11%, as shown in Table 3, signalling a strong consensus among industry professionals about the potential of AI technologies. However, the actual adoption of AI across various operations and project stages reflects a troubling inconsistency, with COV values ranging from 47% to 52%. This stark contrast highlights a critical gap: while the industry recognises AI's transformative potential, the execution of these technologies varies significantly from one organisation to another. Moreover, the overall readiness for AI integration—reflected in a COV of 35%—indicates only moderate agreement regarding the industry's capacity to embrace these innovations. This inconsistency emphasises a pressing challenge: Despite widespread awareness, the implementation of AI is alarmingly uneven. The construction sector stands at a pivotal moment where leveraging AI effectively could revolutionise operations and enhance project outcomes. Addressing these discrepancies is essential for fully harnessing the benefits of AI and driving the industry towards a more efficient and resilient future.

Table 3. Level of Adoption of AI

Variable Code	Variable	Min	Max	Mean	Std. Dev	COV
LA1	I have heard about Artificial Intelligence (AI)	2	5	4.76	0.520	11%
LA2	Establishment I work in uses Artificial Intelligence applications in its day-to-day operations	1	5	2.99	1.412	47%
LA3	We apply Artificial Intelligence during the design and planning stage of the project	1	5	2.89	1.440	50%
LA4	We apply Artificial Intelligence during the construction stage of the project	1	5	2.67	1.396	52%
LA5	We apply Artificial Intelligence during the post-construction /monitoring stage of the project	1	5	2.83	1.407	50%
LA6	The construction industry is ready to fully and aggressively implement Artificial Intelligence in its operations.	1	5	3.40	1.203	35%

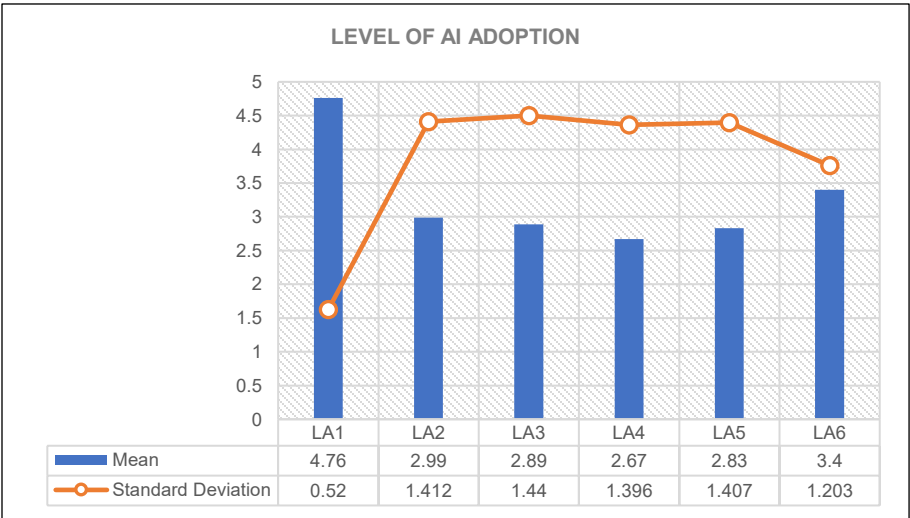


Figure 2. Chart Showing The Level of AI Adoption

These findings revealed that while there is widespread awareness of AI among construction professionals in Zambia and Kenya, its actual adoption and integration into daily operations and across different project stages remain limited. The general indecision about AI

usage reflected a cautious approach within the industry, possibly due to uncertainties around cost, implementation challenges, and perceived benefits (Abioye et al., 2021).

Regional Variation in The Adoption of AI

The results in Table 4 show that in all the statements provided, the p-values were above the significance level of 0.05, indicating there is a 5% risk of incorrectly rejecting the null hypothesis. Since the p-values exceeded this threshold, it suggested that there were no statistically significant differences in AI adoption across Zambia and Kenya. Therefore, the null hypothesis was retained for each of the statements, indicating that the distribution of the responses was similar across the two countries for each of the aspects of AI adoption evaluated.

Table 4. Regional Variation in Adoption of AI

Level of Adoption/Regional	Sig.	Decision
The distribution of 'I have heard about Artificial Intelligence (AI) is the same across the categories of Country.'	.863	Retain the null hypothesis
The distribution of 'Establishment I work in uses Artificial Intelligence applications on its day-to-day operations is the same across categories of Country.'	.968	Retain the null hypothesis
The distribution of 'We apply Artificial Intelligence during the design and planning stage of the project is the same across categories of Country.'	.353	Retain the null hypothesis
The distribution of 'We apply Artificial Intelligence during the construction stage of the project is the same across categories of Country.'	.571	Retain the null hypothesis
The distribution of 'We apply Artificial Intelligence during post-construction /monitoring stage of the project is the same across categories of Country.'	.471	Retain the null hypothesis
The distribution of 'The construction industry is ready to fully and aggressively implement Artificial Intelligence in its operations is the same across categories of Country.'	.239	Retain the null hypothesis

The absence of statistically significant differences in AI adoption between Zambia and Kenya suggested that the construction industries in both countries exhibited similar patterns in integrating AI technologies. This uniformity reflected shared challenges and opportunities within the construction sectors of these two nations (Bang & Olsson, 2022). Both Zambia and Kenya appeared to experience comparable levels of technological advancement, workforce readiness, and industry awareness regarding AI, leading to similar responses observed in the study. Therefore, initiatives to enhance AI adoption in the construction sectors of Zambia and Kenya could be implemented uniformly across both countries. Since no significant differences were found, strategies for promoting AI could be developed with a broad regional focus, reducing the need for country-specific adjustments (Inusah, Kazaz, & Ulubeyli, 2025).

Level of Usage of Artificial Intelligence

Table 5 and Figure 3 present a detailed analysis of AI tool usage within the construction industry of Zambia and Kenya, focusing on various AI and software tools and their frequency of use. ArchiCAD Graphisoft was very frequently used, with a mean score of 3.51. Notably, 38.9 per cent of participants reported using it always, while 16.0 per cent used it very frequently. The popularity of ArchiCAD Graphisoft reflected its robust capabilities in architectural design and project management. This tool's frequent use highlighted its importance in ensuring design accuracy and project coordination, which are critical for

monitoring construction quality (Ali, Mehdipoor, Samsina Johari, Hasanuzzaman, & Rahim, 2022). Autodesk Revit also demonstrated significant adoption, with a mean score of 3.44. Notably, 37.0 per cent of participants reported using it always, and 19.1 per cent used it very frequently. These high usage rates underscored Autodesk Revit's pivotal role in Building Information Modelling (BIM), facilitating detailed architectural designs, documentation, and construction management (Rane, 2023).

Table 5. Level of Usage of AI Tools

	Always		Very Frequently		Frequently		Rarely		Never		Mean
	Freq.	%	Freq.	%	Freq.	%	Freq.	%	Freq.	%	
Robotics	13	8.0	14	8.6	13	8.0	30	18.5	92	56.8	1.93
Machine learning	16	9.9	21	13.0	22	13.6	42	25.9	61	37.7	2.31
Deep learning	10	6.2	15	9.3	23	14.2	35	21.6	79	48.8	2.02
Neuro-networks	3	1.9	19	11.7	15	9.3	38	23.5	87	53.7	1.85
Computer vision	30	18.5	27	16.7	20	12.3	33	20.4	52	32.1	2.69
Automated planning and scheduling	29	17.9	37	22.8	29	17.9	24	14.8	43	26.5	2.91
Optimisation	23	14.2	35	21.6	40	24.7	27	16.7	37	22.8	2.88
Knowledge-based systems	32	19.8	29	17.9	33	20.4	23	14.2	45	27.8	2.88
Natural language processing	14	8.6	24	14.8	33	20.4	19	11.7	72	44.4	2.31
Autodesk Revit	60	37.0	31	19.1	26	16.0	10	6.2	35	21.6	3.44
Autodesk Fusion 360	38	23.5	19	11.7	32	19.8	17	10.5	56	34.6	2.79
Autodesk Naviswork	31	19.1	24	14.8	26	16.0	25	15.4	56	34.6	2.69
Autodesk Robot	29	17.9	23	14.2	24	14.8	31	19.1	55	34.0	2.63
ArchiCAD Graphisoft	63	38.9	26	16.0	27	16.7	22	13.6	24	14.8	3.51
Trimble Tekla Structures	40	24.7	19	11.7	21	13.0	27	16.7	55	34.0	2.77
ProtaStructures	39	24.1	30	18.5	23	14.2	26	16.0	44	27.2	2.96
Prokon	48	29.6	31	19.1	29	17.9	18	11.1	36	22.2	3.23
Procore	15	9.3	19	11.7	28	17.3	26	16.0	74	45.7	2.23
Fieldwire	10	6.2	15	9.3	26	16.0	25	15.4	86	53.1	2.00
Autodesk PlanGrid	20	12.3	19	11.7	25	15.4	25	15.4	73	45.1	2.31
Autodesk BIM 360	25	15.4	33	20.4	32	19.8	26	16.0	46	28.4	2.78
Trimble e-Builder	17	10.5	19	11.7	16	9.9	30	18.5	80	49.4	2.15
Buildertrend	6	3.7	17	10.5	17	10.5	30	18.5	92	56.8	1.86
ESTEEM	12	7.4	13	8.0	16	9.9	33	20.4	88	54.3	1.94

Prokon and ProtaStructures were also frequently used, with mean scores of 3.23 and 2.96, respectively. Prokon was always utilised by 29.6 per cent of participants, while ProtaStructures was reported as always used by 24.1 per cent of participants. Both tools contribute to efficiency and quality control by providing detailed structural insights and optimisation. Conversely, tools such as Buildertrend and ESTEEM were rarely used, with means of 1.86 and 1.94, respectively. Buildertrend was always used by only 3.7 per cent of the participants, and ESTEEM by 7.4 per cent. These low usage rates suggested that these tools may not have been as integral to most construction workflows compared to other AI tools.

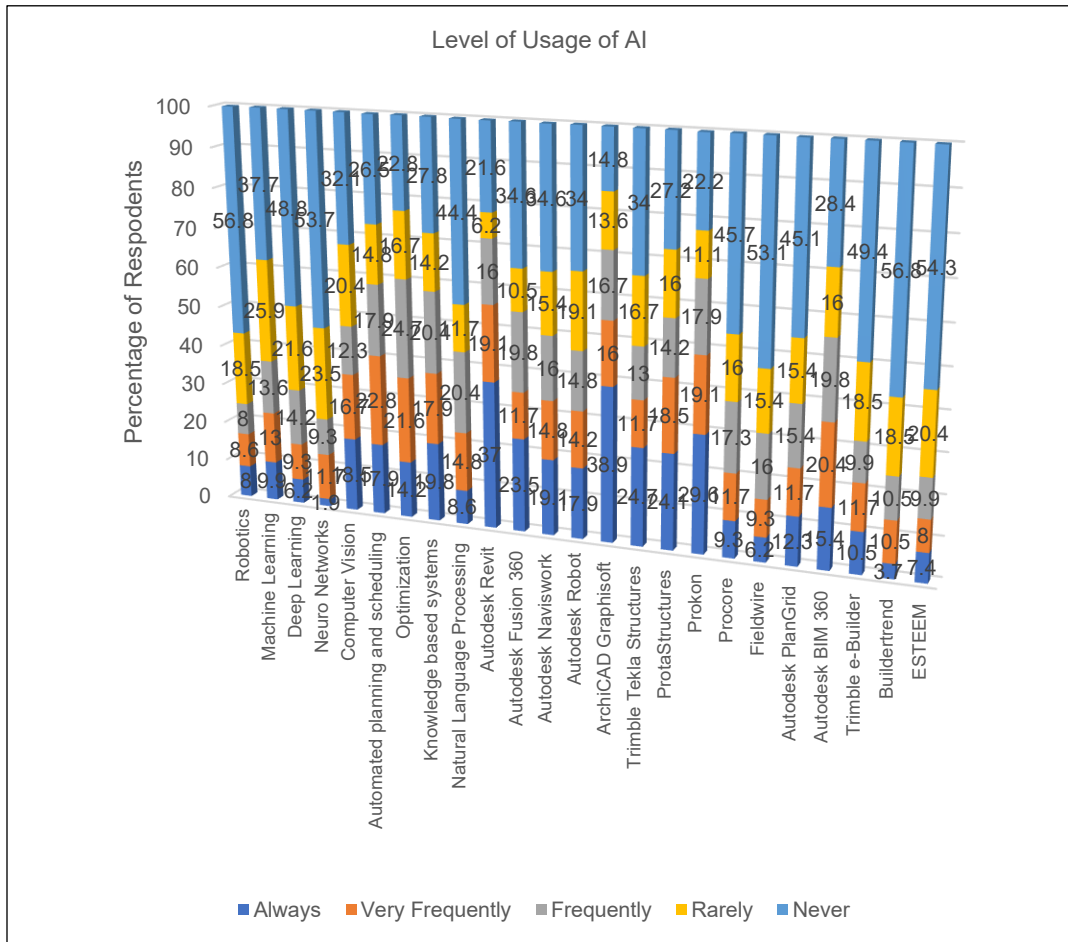


Figure 3. Chart Showing The Level of AI Usage of Respondents

Computer Vision, with a mean of 2.69, and Automated Planning and Scheduling, with a mean of 2.91, were frequently used. Computer Vision was always employed by 18.5 per cent of participants, indicating its role in tasks such as site surveillance, progress tracking, and quality inspection. Automated Planning and Scheduling were always used by 17.9 per cent of participants, reflecting their importance in managing project timelines and resource allocation, which are crucial for maintaining project efficiency and quality. Optimisation, with a mean of 2.88, and Knowledge-Based Systems, with a mean of 2.88, also show frequent usage. Both tools are valuable for improving decision-making processes through data analysis and system management. Optimisation was always used by 14.2 per cent of participants and Knowledge-Based Systems by 19.8 per cent, highlighting their roles in enhancing operational efficiency and problem-solving.

Machine Learning, with a mean of 2.31, and Deep Learning, with a mean of 2.02, had lower mean scores compared to other tools, reflecting their less frequent application in the construction industry. Machine Learning was always used by 9.9 per cent of participants, while Deep Learning was always used by 6.2 per cent. These lower adoption rates suggested that these advanced AI methodologies might have been emerging technologies in construction, with applications that were still evolving. Neuro-networks, with a mean of 1.85,

and Robotics, with a mean of 1.93, were among the least used tools, with Neuro-networks being always used by only 1.9 per cent and Robotics by 8.0 per cent. This limited usage could have been attributed to the specialised nature of these tools or the developing stage of their application in construction practices.

The findings revealed a diverse and evolving landscape of AI tool usage within the construction industry of Zambia and Kenya, reflecting the industry's varied needs and different stages of technology adoption. The moderate adoption rates of these AI tools suggested that these technologies were gaining traction. The rising use of these tools reflected an industry trend toward embracing more advanced technologies to optimise operations and ensure successful project outcomes.

CONCLUSIONS

The construction sectors in Zambia and Kenya are poised for rapid growth, fuelled by increasing urbanisation and escalating infrastructure demands. Yet, despite the evident potential of Artificial Intelligence (AI) to enhance efficiency and productivity, adoption rates remain notably low. This study illuminated the complex landscape of opportunity and challenges surrounding AI integration in these industries. While construction professionals demonstrated a strong awareness of AI technologies, their actual implementation was hindered by concerns over costs, implementation complexities, and uncertainty regarding the tangible benefits of AI. The findings revealed that both Zambia and Kenya shared similar challenges and opportunities in AI adoption, with no significant differences between the two countries. Despite a reliance on established tools like ArchiCAD Graphisoft and Autodesk Revit for design and project management, the limited utilisation of advanced AI applications—such as machine learning and robotics—indicated a need for a more comprehensive approach to technology integration within the sector.

To bridge this gap, it is essential to emphasise educational initiatives, pilot programs, and collaborative efforts that promote a culture of innovation. A focused strategy to educate stakeholders and encourage collaboration could pave the way for more effective AI adoption, ultimately improving project efficiency, decision-making, and overall productivity. As the construction industry evolves, embracing AI will be crucial to overcoming persistent challenges like cost overruns and schedule delays. By fostering an environment that champions innovation and technological advancement, Zambia and Kenya could leverage AI to drive sustainable growth and elevate the quality of construction practices, establishing a robust foundation for future success.

ACKNOWLEDGEMENTS

This research was supported by the SPREE program, funded by the European Union and the African Union under Project No. [614586-MOBAF 2019-1-1]. We also extend our gratitude to the University of Zambia for providing access to resources throughout the study.

REFERENCES

- Abioye, S. O., Oyedele, L. O., Akanbi, L., Ajayi, A., Davila Delgado, J. M., Bilal, M., ... Ahmed, A. (2021). Artificial intelligence in the construction industry: A review of present status, opportunities and future challenges. *Journal of Building Engineering*, 44, 103299. Retrieved from <https://doi.org/10.1016/j.jobe.2021.103299>
- Adedeji Olawale, M., Ayeh, A. A., Adekola, F. O., Precious, A. S., Joshua, A. O., & Oladosu, O. T. (2023). A Review on the Intersection of Artificial Intelligence on Building Resilient Infrastructure, Promoting Inclusive and Sustainable Industrialization and Fostering Innovation. *International Journal of Engineering and Modern Technology*, 9(3), 44–74. Retrieved from <https://doi.org/10.56201/ijemt.v9.no3.2023.pg44.74>
- Ali, S. B. M., Mehdipoor, A., Samsina Johari, N., Hasanuzzaman, M., & Rahim, N. A. (2022). Modeling and Performance Analysis for High-Rise Building Using ArchiCAD: Initiatives towards Energy-Efficient Building. *Sustainability (Switzerland)*, 14(15). Retrieved from <https://doi.org/10.3390/su14159780>
- Aliu, J., Oke, A. E., & Oni, S. B. (2024). Evaluating strategies to promote mechatronics deployment in AECO projects: a Nigerian construction practitioners' perspectives. *International Journal of Construction Management*, 24(14), 1540–1549. Retrieved from <https://doi.org/10.1080/15623599.2023.2266630>
- Bang, S., & Olsson, N. (2022). Artificial Intelligence in Construction Projects: A Systematic Scoping Review. 224-238. Retrieved from <https://doi.org/10.32738/JEPPM-2022-0021>
- Basaif, A. A., Alashwal, A. M., Azli Mohd-Rahim, F., Bari, S., Karim1, A., & Loo, S.-C. (2020). TECHNOLOGY AWARENESS OF ARTIFICIAL INTELLIGENCE (AI) APPLICATION FOR RISK ANALYSIS IN CONSTRUCTION PROJECTS. *MCRJ Special Issue (Vol. 9)*.
- Gurgun, A. P., Koc, K., & Kunkcu, H. (2024). Exploring the adoption of technology against delays in construction projects. *Engineering, Construction and Architectural Management*, 31(3), 1222–1253. Retrieved from <https://doi.org/10.1108/ECAM-06-2022-0566>
- Hossan, D., Dato' Mansor, Z., & Jaharuddin, N. S. (2023). Research Population and Sampling in Quantitative Study. *International Journal of Business and Technopreneurship (IJBT)*, 13(3), 209–222. Retrieved from <https://doi.org/10.58915/ijbt.v13i3.263>
- Huang, J., & Koroteev, D. D. (2021). Artificial intelligence for planning of energy and waste management. *Sustainable Energy Technologies and Assessments*, 47, 101426. Retrieved from <https://doi.org/10.1016/j.seta.2021.101426>
- Ihsanullah, I., Alam, G., Jamal, A., & Shaik, F. (2022). Recent advances in applications of artificial intelligence in solid waste management: A review. *Chemosphere*, 309, 136631. Retrieved from <https://doi.org/10.1016/j.chemosphere.2022.136631>
- Inusah, Y., Kazaz, A., & Ulubeyli, S. (2025, January 16). Barriers to E-Tendering Implementation in the Construction Industry: A Decade and Beyond Comprehensive Review and Analysis. Retrieved from <https://doi.org/10.20944/preprints202501.1255.v1>
- Kamarazaly, M. A., Chin, S., Ling, A., Au, J., & Hoong, M. (2024). SMART B2B ONLINE PROCUREMENT CLOUD PLATFORM IN MALAYSIAN CONSTRUCTION INDUSTRY. *MCRJ Special Issue (Vol. 21)*.
- Kong, H. S., & Jie, C. W. (2024). PROSPECTS AND CHALLENGES OF DIGITAL TRANSFORMATION IN THE MALAYSIAN CONSTRUCTION INDUSTRY. *MCRJ Special Issue (Vol. 21)*.

- Kumar, M., & Kumari, S. (2025). Causes of delays in road construction projects: a systematic review. *Journal of Financial Management of Property and Construction*. Retrieved from <https://doi.org/10.1108/JFMPC-01-2023-0004>
- Lima, L., Trindade, E., Alencar, L., Alencar, M., & Silva, L. (2021). Sustainability in the construction industry: A systematic review of the literature. *Journal of Cleaner Production*, 289, 125730. Retrieved from <https://doi.org/10.1016/j.jclepro.2020.125730>
- Mitlin, D. (2021). Urban development in Africa: Challenges and opportunities - ACRC. Available at: [Accessed 17 November].
- Mulisa, F. (2022). Sampling techniques involving human subjects: Applications, pitfalls, and suggestions for further studies. *International Journal of Academic Research in Education*, 8(1), 74–83. Retrieved from <https://doi.org/10.17985/ijare.1225214>
- Ojo, R. O., Ajayi, A. O., Owolabi, H. A., Oyedele, L. O., & Akanbi, L. A. (2022). Internet of Things and Machine Learning techniques in poultry health and welfare management: A systematic literature review. *Computers and Electronics in Agriculture*, 200, 107266. Retrieved from <https://doi.org/10.1016/j.compag.2022.107266>
- Oxford Insights. (2023). Gov AI Readiness Index. Oxford Insights.
- Ramachandran, V. (2021). Convergence, Development, and Energy-Intensive Infrastructure in Africa: A Review of the Evidence. *Sustainability*, 13(19), 10572. Retrieved from <https://doi.org/10.3390/su131910572>
- Rane, N. (2023). Integrating Building Information Modelling (BIM) and Artificial Intelligence (AI) for Smart Construction Schedule, Cost, Quality. and Safety Management: Challenges and Opportunities. Retrieved from <https://doi.org/10.2139/ssrn.4616055>
- Raslim, F. M., Ern, K. J., Liyana, H., & Ariffin, T. (2024). THE POTENTIAL OF SMART WEARABLE TECHNOLOGY IN MALAYSIAN CONSTRUCTION HEALTH & SAFETY. *MCRJ Special Issue (Vol. 21)*.
- Sin, L. P., Choy, C. F., & Fung, W. P. (2020). EXPLORING THE POTENTIAL APPLICATION OF BIG DATA IN THE CONSTRUCTION INDUSTRY. *MCRJ Special Issue (Vol. 9)*.
- Tanui, S. J., & Tembo, M. (2023). An Exploration of the Extent of Monitoring and Evaluation of Sustainable Construction in Kenya: A Landscape Architecture Perspective. *Sustainability*, 15(19), 14415. Retrieved from <https://doi.org/10.3390/su151914415>
- Wamba-Taguimdje, S.-L., Fosso Wamba, S., Kala Kamdjoug, J. R., & Tchatchouang Wanko, C. E. (2020). Influence of artificial intelligence (AI) on firm performance: the business value of AI-based transformation projects. *Business Process Management Journal*, 26(7), 1893–1924. Retrieved from <https://doi.org/10.1108/BPMJ-10-2019-0411>
- Zhang, M., Shi, R., & Yang, Z. (2020). A critical review of vision-based occupational health and safety monitoring of construction site workers. *Safety Science*, 126, 104658. Retrieved from <https://doi.org/10.1016/j.ssci.2020.104658>
- Zhu, H., Hwang, B.-G., Ngo, J., & Tan, J. P. S. (2022). Applications of Smart Technologies in Construction Project Management. *Journal of Construction Engineering and Management*, 148(4), 4022010. Retrieved from [https://doi.org/10.1061/\(ASCE\)CO.1943-7862.0002260](https://doi.org/10.1061/(ASCE)CO.1943-7862.0002260)
- Zickar, M. J., & Keith, M. G. (2023). Innovations in Sampling: Improving the Appropriateness and Quality of Samples in Organizational Research. *Annual Review of Organizational Psychology and Organizational Behavior*, 10(1), 315–337. Retrieved from <https://doi.org/10.1146/annurev-orgpsych-120920-052946>

UNLOCKING SUSTAINABLE FUTURES: A SYSTEMATIC REVIEW ON THE BENEFITS OF INDUSTRIALIZED BUILDING SYSTEM (IBS)

Nadzirah Zainordin¹, Lou Hai Loon¹, Sui Lai Khoo¹, Mohammad Fadhil Mohammad², Ahmad Faris Omar³, Salmaliza Salleh⁴, Quoc-Bao Bui⁵ and Le To Quyen⁵

¹School of Architecture & Built Environment, Faculty of Engineering, Technology & Built Environment, UCSI University, Kuala Lumpur Campus, Malaysia.

²School of Construction and Quantity Surveying, College of Built Environment, Universiti Teknologi MARA (UiTM), Shah Alam, Selangor, Malaysia.

³Center of Building & Resilient Development, Faculty of Engineering and the Built Environment, SEGi University, Kota Damansara, Selangor, Malaysia.

⁴Department of Civil and Environmental Engineering, Faculty of Engineering, Universiti Teknologi PETRONAS, Seri Iskandar, Perak Darul Ridzuan, Malaysia.

⁵Faculty of Civil Engineering, Ton Duc Than University, Nguyen Huu Tho Street, Tan Phong ward, District 7, Ho Chi Minh City, Vietnam.

Abstract

In the dynamic realm of construction, the Industrialized Building System (IBS) stands out as a transformative approach, promising a multitude of benefits. This study embarks on a journey to unravel the benefits through a systematic literature review. By synthesizing an extensive array of scholarly works, this research aims to shed light on the range of benefits that IBS implementation brings to the construction industry. The systematic review methodology ensures a rigorous and unbiased exploration, encompassing factors such as cost and finance, sustainability, environmental, safety, social benefit, labour reduction, and construction site. Furthermore, this study delves into the challenges and facilitators associated with IBS adoption, offering a holistic understanding of the intricacies involved. The findings not only underline the significant advantages that IBS presents but also provide invaluable insights for industry practitioners, policymakers, and researchers striving to navigate the terrain of modern construction practices. As the construction industry seeks innovative solutions for sustainable and efficient building, this study's revelations contribute to the ongoing dialogue, fostering awareness and informed decision-making around the potential perks of integrating Industrialized Building Systems.

Keywords: *Industrialised building system; systematic literature review; benefits.*

INTRODUCTION

The construction industry is identified as one of the most important pillars for a country's economic growth and it is widely acknowledged for its vital economic role for a country (Kamaruddin et al., 2018; Zainordin N. et al., 2023). Hence, it is undeniable that the construction industry had boost the economic for the country and had contributed significantly to the Gross Domestic Product (GDP) of a country. According to a study by Myers (2016) as supported by Lui (2020), Gross Domestic Product (GDP) refers to the formal measure used by government worldwide for measuring the development of economic annually within the country in figures. Thus, it shows that the construction industry is a significant pillar in enabling a country to achieve competitiveness internationally.

According to the Construction Industry Development Board (CIDB), the Industrialized Building System (IBS) is a construction method whereby the components are manufactured in a controlled and monitored environment such as factory, and the components are then transported to construction site and installed with minimum workforce (CIDB Malaysia - IBS

Portal, 2022). With the implementation of Industrialized Building System (IBS), this provides a rapid solution for construction works as it involves pre-fabrication of components off-site. This method of construction was widely adopted in the construction industry in other countries. As mentioned by Zabihi et al. (2013) and Ashrafi (2017), the Industrialized Building System (IBS) had been adopted by countries such as Germany, the United Kingdom and Japan, after the Second (2nd) World War that boost the demands on buildings.

However, the adoption rate of the system in Malaysian construction industry is still considered unsatisfactory. Based on a statistic from the Construction Industry Development Board (CIDB), the adoption rate of Industrialized Building System for private sector only contribute to 35% at the year of 2020 which does not fulfil the target of 50% adoption rate. This is due to the fact that the construction professionals are still lacking on the awareness of benefits brought by the Industrialized Building System (IBS). Jabar et al. (2018) and Gan et al. (2017) mentioned in their study that the construction stakeholders tend to have negative perceptions on Industrialized Building System (IBS) and are unaware of the advantages. This issue would then escalate into the barrier for the implementation of Industrialized Building System (IBS) in Malaysian construction industry. Therefore, one of the main objectives for this research is to determine the benefits of implementing Industrialized Building System (IBS) in construction industry Malaysia.

LITERATURE REVIEW

According to Leong & Zainal (2021), Industrialized Building System can be defined as mass production in a factory or at the site factory depend on standardize shapes and dimensions. Further emphasis by Kwang et al. (2021), Industrialised Building System (IBS) is the term coined by the industry and government to describe the adoption of industrial construction and the use of prefabrication of components in building construction.

The perks or benefits of implementing Industrialized Building System (IBS) in construction industry are tabulated and shown in Table 1. In this study, there are total of 21 scholars being referred. In general, the benefits of Industrialized Building System (IBS) can be categorized into seven (7) groups after referring to the journals, including cost and finance, sustainability, environmental, safety, social benefit, labour reduction, and construction site as shown in Table 1, by accumulating ticks via referring journals.

METHODOLOGY

In this study employ a rigorous systematic literature review process to comprehensively and objectively analyse the existing body of knowledge related to benefits of implementing Industrialised building system (IBS). By following a well-defined methodology, the aim to identify the benefits of implementing Industrialised building system (IBS) by relevant studies from diverse sources. This systematic approach enables to minimize bias, ensure transparency, and establish a robust foundation for the research findings. Through the systematic review, it is intended to provide a comprehensive overview of the current state of research, identify gaps in knowledge, highlight trends, and draw meaningful insights that contribute to a deeper understanding of benefits of implementing Industrialised building system (IBS).

Table 1. Perks of Implementing Industrialized Building System (IBS)

No. Authors (Year)		Perks of Implementing IBS						
		Cost and Finance	Sustainability	Environmental	Safety	Social Benefit	Labour Reduction	Construction Site
1.	Tarang et al., 2022	*		*			*	*
2.	Al-Aidrous et al., 2021				*		*	
3.	Alawag et al., 2021	*		*	*		*	*
4.	Lee et al., 2021	*	*	*	*		*	*
5.	Leong & Zainal, 2021	*		*			*	*
6.	Kwang et al., 2021	*	*	*	*		*	
7.	Samad et al., 2020	*		*	*	*	*	*
8.	Shafie, 2020	*		*	*		*	*
9.	Kasim et al., 2019	*	*	*	*		*	*
10.	Ismail et al., 2019	*		*	*		*	*
11.	Adnan et al., 2019	*		*	*		*	*
12.	Lim & Sam, 2018	*		*	*		*	*
13.	Jabar & Ismail, 2018	*	*	*	*		*	*
14.	Nawi et al., 2018	*		*	*		*	*
15.	Rahim & Qureshi, 2018	*		*	*		*	*
16.	Gan et al., 2017	*		*	*		*	*
17.	Ashrafi, 2017	*		*		*	*	*
18.	Santoso et al., 2017	*	*	*	*	*	*	*
19.	Nawi et al., 2013	*	*	*	*		*	*
20.	Abedi et al., 2011	*	*	*	*		*	
21.	Nawi et al., 2011		*	*	*		*	
Total Times Referred		19	8	20	18	3	21	17

The research methodology adopted for the present of research work is presented in Figure 1. In the initial phase, an exhaustive literature review is carried out to extract the Industrialised building system (IBS) attributes. Further with the systematic literature review process where there (3) filters have been set. There are:

- Filter 1 – Database selection for collection the journal. Where in this research, the Scopus journal has been chosen.
- Filter 2 – Selection of keyword. The keywords used are: ‘benefits’ and ‘industrialised building system’
- Filter 3 – Time period inclusion between year 2011 to 2022.

A systematic review was conducted using a combination of the keyword highlighted above. The perks or benefits of Industrialised building system (IBS) has been tabulated according to scholars and number of times referred to the attributes has been tabulated accordingly. Last stage, presenting the findings on attributes of Industrialised building system (IBS) in the form of infographic presentation- sunburst. By referring to Figure 2, shown the numbers of journal has been used for this research. There are 21 journals in the construction industry that focus on the implementation of Industrialized Building System (IBS).

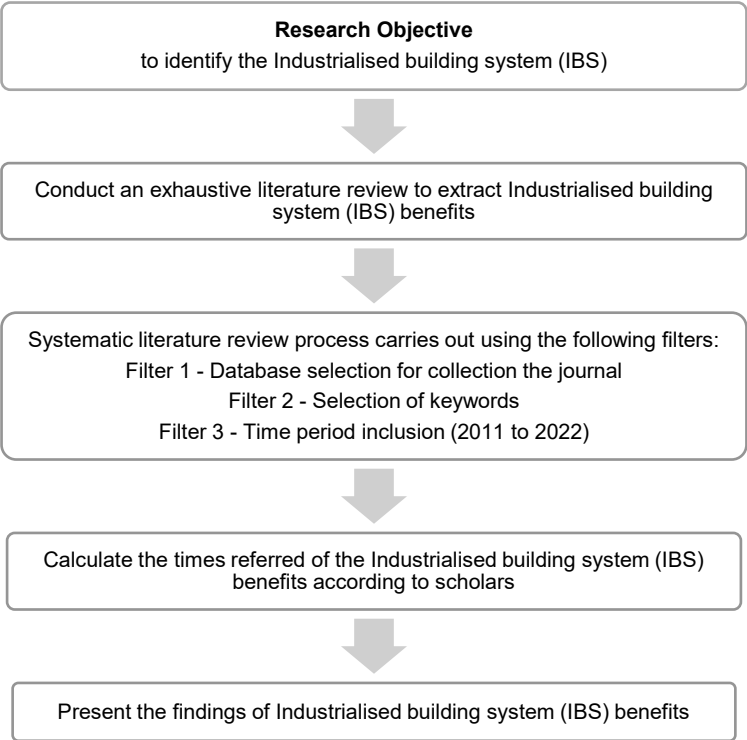


Figure 1. Research Methodology

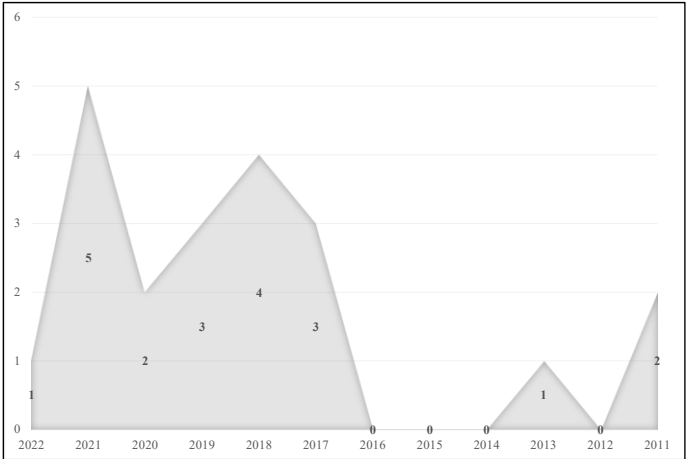


Figure 2. Number of Journals Referred According to Year

RESULTS AND DISCUSSION

Results

Based on Table 1, the ranking on times referred for benefits of Industrialized Building System (IBS) rank based on the Table 2 below and further reflected on Figure 3 Spider-web tabulation numbers of times referred benefits of Industrialized Building System (IBS).

Table 2. The Ranking Based on Total Times Referred for Perks of Implementing Industrialized Building System (IBS)

No.	Perks of Implementing IBS	Total Times Referred	Ranking
1.	Cost and finance	19	3
2.	Sustainability	8	6
3.	Environmental	20	2
4.	Safety	18	4
5.	Social benefit	3	7
6.	Labor reduction	21	1
7.	Construction site	17	5

The ranking on seven (7) perks of implementing IBS has been rank based on numbers of times referred and highlighted by the twenty (21) scholars. The first rank is labor reduction and follow by environmental, cost and finance, safety, construction site, sustainability and social benefits are the lowest rank among all seven (7) perks.



Figure 3. Spider-Web Tabulation Numbers of Times Referred Benefits of Industrialized Building System (IBS)

Discussion

Labor Reduction

In fact, one of the major sub-benefit included under the labor reduction benefit group is the reduction of labor demand on site. According to Table 2, there are a total of 21 scholars mentioned that this is identified as sub-benefit for Industrialized Building System (IBS) in their studies. Based on a study conducted by Rahim and Qureshi (2018), Industrialized Building System (IBS) provides the benefit of reducing labor demand on site due to the higher mechanization as the process for the system are repeatable. In fact, Ismail et al. (2019) pointed out in the study that the labor demand on site is greatly reduced with the introduction of Industrialized Building System, including the tradesmen such as the carpenters and the bar-benders. Moreover, Nawi et al. (2011) and Kasim et al. (2019) mentioned that due to the higher degree of mechanization involved in Industrialized Building System (IBS) projects, it allows prefabrication at centralized factories, thus provides a significant decrease to the labor

requirements on site. According to Lee et al. (2021), Industrialized Building System (IBS) only require minimal installation works on the construction site as compared to conventional construction such as setting up formwork on construction site.

Environmental

As according to Table 2, wastage reduction during construction process was also classified as a sub-benefit for the benefit group of environmental. Based on a questionnaire survey conducted by Kasim et al. (2019) to Grade 7 contractors that registered with the Construction Industry Development Board (CIDB), majority of the respondents strongly agree that there is minimal wastage generation with the implementation of Industrialized Building System (IBS). Aside from that, Rahim and Qureshi (2018) also claimed that due to the off-site prefabrication of materials at factories, hence lesser wastage was generated on site and thus contribute to cleaner site environment. As according to Lee et al. (2021), minimization of site wastage had brought about the benefit for providing more environmental-friendly impact as compared to conventional method. Furthermore, under the group of environmental benefit, Industrialized Building System (IBS) is identified to generate lesser negative impacts on the environment. This sub-benefit was being mentioned by 7 scholars ranging from year 2011 to 2021 as tabulated in Table 1. The adoption of Industrialized Building System (IBS) is considerably environmental-friendly and thus reducing the negative impacts on environmental aspect (Ashrafi, 2017 & Gan et al., 2017 & Leong & Zainal, 2021). According to Nawi et al. (2011), with better usage of available building materials, the implementation of Industrialized Building System (IBS) had significantly contributed to the decrease of negative impacts on the environment. Besides, Leong & Zainal (2021) mentioned in their study that the harmful impacts on environment was greatly reduced with the utilization of Industrialized Building System (IBS) as compared to conventional construction that generates various pollutions. In addition, Ashrafi (2017) also mentioned that due to the decrease of environmental impacts by Industrialized Building System (IBS), conflicts with authorities and surrounding facilities can also be avoided.

Cost and Finance

For the group of cost and finance, the lower overall construction costs due to time-saving construction process is one of the major benefits for Industrialized Building System (IBS). According to Jabar and Ismail (2018), earlier completion time of construction project had resulted to a benefit of cost savings and hence lower overall construction costs incurred. Likewise, Adnan et al. (2019) also mentioned that the savings in the construction time can compensate the construction costs, hence allowing overall construction costs to be reduced. Based on another study by Ismail et al. (2019), the implementation of Industrialized Building System (IBS) increases the speed of construction completion and contribute to cost savings in over construction costs. Besides, savings in labor costs is also identified as a sub-benefit under the benefit group of cost and finance. This sub-benefit had been mentioned by 4 scholars including Nawi et al. (2013), Nawi et al. (2018), Kwang et al. (2021) and Lee et al. (2021). According to Kwang et al. (2021), with the implementation of Industrialized Building System, it provides a cost saving in labor costs as compared to conventional construction method. This is due to the fact that Industrialized Building System (IBS) is prefabricated off-site, hence it reduces the demand of labors on-site and it significantly reduce the costs for labors (Nawi et al., 2013 & Nawi et al., 2018 & Lee et al., 2021).

Safety

Moreover, minimization of hazards and risks to workers is also included as one of the sub-benefits for implementation of Industrialized Building System (IBS). The adoption of Industrialized Building System (IBS) is said to be efficient in providing the sub-benefit of minimizing the risks related to site safety and meanwhile improving health and safety of workers on site (Nawi et al., 2011 & Jabar & Ismail, 2018 & Lim & Sam, 2018 & Shafie, 2020 & Al-Aidrous et al., 2021). Besides that, Santoso et al. (2017) identified that off-site construction is one of the reasons that Industrialized Building System (IBS) can minimized the hazards and risks to workers on site. Likewise, Samad et al. (2020) also mentioned that conventional construction method often results in unhealthy work environment, while on the other hand the usage of Industrialized Building System (IBS) allows reduced construction works on site and hence minimize the safety risks for workers. Apart from that, another sub-benefit that is categorized under the benefit group of safety is the reduction on construction accidents. This statement had been cited from 3 scholars including Santoso et al. (2017), Samad et al. (2020) as well as Al-Aidrous et al. (2021). According to Samad et al. (2020), safety aspects play an important role in determining the successfulness for delivering construction projects. Hence, it was identified that with the usage of Industrialized Building System (IBS), better and safer working environment can be obtained and meanwhile accidents on site can be reduced Al-Aidrous et al. (2021). Based on a study by Santoso et al. (2017), construction accidents on site including falling of materials from high level are significantly reduced with the implementation of Industrialized Building System (IBS) as the construction works are more controllable and done off-site.

Construction Site

The scholars mentioned this fact in their study including Abedi et al. (2011), Gan et al. (2017) as well as Shafie (2020). In fact, Abedi et al. (2011) and Shafie (2020) mentioned in their study that the implementation of Industrialized Building System (IBS) allows for proper coordination and construction site management as the activities carry out on site is relatively lesser and easier to be managed with. Construction site management includes the management of resources, quality and time, as well as the coordination of works, with better construction site management it improves productivity of works. Not only that, the implementation of Industrialized Building System (IBS) is also identified to have the advantages of promoting cleanliness and tidiness of construction site. This is considered as one of the sub-benefits under the group of construction site and it had been mentioned by 14 scholars as identified in Table 2.3. According to Samad et al. (2020), hygiene is identified as an essential aspect that helps determining the successfulness of construction projects. Hence, Santoso et al. (2017), Ashrafi (2017), Jabar & Ismail (2018), Adnan et al. (2019) and Lee et al. (2021) mentioned in their study that with the utilization of Industrialized Building System (IBS) for projects, a cleaner and neater construction site can be obtained. Moreover, this statement is also supported by Ismail et al. (2019), as the cast-in-situ wet and dirty conventional construction methods can be substituted with the implementation of Industrialized Building System (IBS). According to Rahim & Qureshi (2018), due to the benefits of providing cleaner and tidier construction site, the construction industry for countries including Malaysia and Singapore had slowly shifted from conventional construction to Industrialized Building System (IBS).

Sustainability

As for the benefit group of sustainability, the sub-benefit identified under this group is the optimum usage of materials. The scholars including Nawi et al. (2011), Abedi et al. (2011), Santoso et al. (2017) and Lee et al. (2021). Nawi et al. (2011) and Lee et al. (2021) mentioned that optimum usage of materials is also identified as a benefit for the implementation of Industrialized Building System (IBS). According to Abedi et al. (2011), the optimum usage of materials such as control and careful selection of materials such as steel and sand, will significantly contribute to sustainability aspect. Besides that, the implementation of Industrialized Building System (IBS) allows optimization on usage of materials and material conservation as compared to conventional construction method (Santoso et al., 2017). Moreover, allow repetitive usage of mould and system formwork is also identified the benefit group of sustainability as mentioned by 5 scholars including Nawi et al. (2011), Jabar & Ismail (2018), Ismail et al. (2019), Kasim et al. (2019) and Kwang et al. (2021). Based on a study by Jabar & Ismail (2018), the system formwork for Industrialized Building System (IBS) that is made of steel, aluminium as well as scaffolding, can be used repetitively can it improves sustainability. Likewise, Kasim et al. (2019) and Kwang et al. (2021) stated in their study that the repetitive usage of system formwork made of steel and the scaffolding are able to provide substantial cost saving and improve sustainability.

Social Benefits

As for the benefit group of social benefit, reduction on dust and noise pollution had been determined as a sub-benefit according to the journals referred. In overall, there are 3 scholars mentioning this fact as benefit of Industrialized Building System (IBS) in their study. Among the scholars, includes Santoso et al. (2017), Ashrafi (2017) and Samad et al. (2020). Ashrafi (2017) identified that with the implementation of Industrialized Building System (IBS), pollutions on dust and noise are greatly reduced on site and hence preventing conflicts with authorities or neighbors. Due to the fact that Industrialized Building System (IBS) involves prefabrication in factory, hence the pollution of dust and noise on site that are caused by construction works can be reduced even if the projects' site is in urban areas (Santoso et al., 2017). Moreover, Samad et al. (2020) also pointed out that unlike conventional construction that will result in dust and noise pollution, the usage of Industrialized Building System (IBS) provides social benefits of reducing pollutions not only to employees on site, but also to local community.

CONCLUSION

Once the benefits have been identified, the next step involves formulating strategies to prepare and educate construction stakeholders about the potential advantages offered by the Industrialized Building System (IBS). Raising awareness about the benefits of Industrialized Building Systems (IBS) within the construction industry involves targeted communication and educational strategies. There can be achieve by the following strategies:

1. Educational Workshops and Seminars: Organize workshops, seminars, and webinars that focus on explaining the concept of IBS and its advantages. Invite industry experts, practitioners, and academics to share insights and case studies showcasing successful IBS implementations.

2. **Case Studies and Success Stories:** Compile and share real-world case studies that highlight the positive outcomes of IBS projects. Emphasize factors such as reduced construction time, cost savings, improved quality, and enhanced safety.
3. **Demonstration Projects:** Collaborate with industry stakeholders to initiate demonstration projects that use IBS. Invite professionals to visit these projects, observe the efficiency and quality first-hand, and discuss the benefits with project teams.
4. **Collaboration with Professional Associations:** Partner with construction-related professional associations and industry groups. Present the benefits of IBS at their conferences, events, and meetings, reaching a broader audience of industry professionals.
5. **Industry Publications and Newsletters:** Write articles or publish content in industry magazines, newsletters, and online platforms. These platforms allow you to communicate the advantages of IBS to a wide range of construction practitioners.
6. **Online Resources and Web Presence:** Create a dedicated website or web page that provides comprehensive information about IBS, including its benefits, case studies, research findings, and resources. Use social media platforms to share updates and engage with industry professionals.
7. **Networking Events:** Host networking events that bring together professionals from different sectors of the construction industry. Use these events as platforms for discussing and promoting the benefits of IBS in a more informal setting.
8. **Collaboration with Educational Institutions:** Partner with universities, colleges, and vocational schools offering construction-related programs. Integrate information about IBS benefits into relevant courses, encouraging future professionals to adopt and promote IBS.
9. **Engage Influential Industry Leaders:** Identify influential figures within the construction industry and engage them in advocating for IBS benefits. Their endorsement can carry significant weight and encourage others to explore IBS.
10. **Government Support and Regulations:** Collaborate with government agencies involved in construction regulations and policies. Advocate for policies that promote and incentivize IBS adoption, while highlighting its benefits for sustainable and efficient construction.
11. **Interactive Platforms:** Develop interactive tools, such as online calculators or cost comparison tools, that allow construction professionals to estimate the benefits of IBS in their specific projects.
12. **Feedback and Testimonials:** Gather feedback from those who have implemented IBS and share their positive experiences as testimonials. Authentic feedback can resonate with others considering adopting IBS.

The key-take-away that consistent and targeted communication is key to creating lasting awareness about the benefits of IBS within the construction industry. People in the construction industry who advocate for the benefits of IBS. The support is very important and can encourage others to find out about irritable bowel syndrome.

REFERENCES

- Abedi, M., Fathi, M. S., & Mirasa, A. K. (2011). Establishment and Development of IBS in Malaysia. *Sustainable Building and Infrastructure Systems: Our Future Today*, 405.
- Adnan, H., Einur Azrin Baharuddin, H., Arzlee Hassan, A., Aisyah Asyikin Mahat, N., & Khalidah Kaharuddin, S. (2019). Success Factors Among Industrialised Building System (IBS) Contractors in Malaysia. *IOP Conference Series: Earth and Environmental Science*, 233, 022033. <https://doi.org/10.1088/1755-1315/233/2/022033>
- Al-Aidrous, A.-H. M. H., Rahmawati, Y., Wan Yusof, K., Omar Baarimah, A., & Alawag, A. M. (2021). Review of Industrialized Buildings Experience in Malaysia: An Example of a Developing Country. *IOP Conference Series: Earth and Environmental Science*, 682(1), 012003. <https://doi.org/10.1088/1755-1315/682/1/012003>
- Alawag, A. M. M., Alaloul, W. S., Liew, M. S., Al-Bared, M. A. M., Zawawi, N. A. W. A., & Ammad, S. (2021). The Implementation of the Industrialized Building System in the Malaysian Construction Industry—A Comprehensive Review. In M. A. A. Zaini, M. Jusoh, & N. Othman (Eds.), *Proceedings of the 3rd International Conference on Separation Technology* (pp. 3–16). Springer Singapore. https://doi.org/10.1007/978-981-16-0742-4_1
- Ashrafi, M. S. (2017). Industrialised Building System (IBS) Adoption In Iran, Perception Of Users And Industry Participants. *IOSR Journal of Mechanical and Civil Engineering*, 24.
- Gan, Y., Shen, L., Chen, J., Tam, V., Tan, Y., & Illankoon, I. (2017). Critical Factors Affecting the Quality of Industrialized Building System Projects in China. *Sustainability*, 9(2), 216. <https://doi.org/10.3390/su9020216>.
- Ismail, H., Akasah, Z. A., Nagapan, S., Khamis, A., & Saharani, M. (2019). An empirical study on benefits and future expectation of (IBS) applications in Melaka construction firm. *IOP Conference Series: Earth and Environmental Science*, 269(1), 012023. <https://doi.org/10.1088/1755-1315/269/1/012023>.
- Jabar, I. L., & Ismail, F. (2018). Challenges in the Management of IBS Construction Projects. *Asian Journal of Quality of Life*, 3(9), 37. <https://doi.org/10.21834/ajqol.v3i9.75>.
- Kasim, N., Al-Shami, M. H., Latiffi, A. A., Ibrahim, M. U., Zainal, R., & Noh, H. M. (2019). Improving Contractors' Practices of Industrialized Building System (IBS) Implementation in Construction Industry. *Journal of Technology Management and Business*, 6(3). <https://doi.org/10.30880/jtmb.2019.06.03.005>.
- Kwang, J. J., Seow, T. W., Mohamed, S., & Masrom, A. N. (2021). Strategies in Promoting Industrialised Building System (IBS) among Contractors. 2(1), 13.
- Lee, Y. Y., Abdullah, N. M. Q., Lee, Y. H., Gui, H. C., & Whyte, A. (2021). Perception Analysis of Industrialized Building System (IBS) Implementation for G7 Contractors in Kuching, Sarawak. *ASM Science Journal*, 14, 1–7. <https://doi.org/10.32802/asmscj.2020.641>.
- Leong, L. J., & Zainal, R. (2021). The Study of Industrialized Building System (IBS) Implementation in Terrace Housing Project. 2(1), 14.
- Lim, C. F., & Sam, M. K. (2018). A study on factors affecting the implementation of industrialized building system (IBS) on high-rise construction in developing regions of Malaysia. *INTI Journal*, 2(10), Article 10. <http://intijournal.newinti.edu.my>.

- Nawi, M. N. M., Anuar, H., & Lee, A. (2013). A Review of IBS Malaysian Current and Future Study. *International Journal of Engineering Research & Technology (IJERT)* Vol. 2 Issue 10, October - 2013, 2, 2378–2383.
- Nawi, M. N. M., Lee, A., & Nor, K. (2011). Barriers to Implementation of the Industrialised Building System (IBS) in Malaysia. *The Built & Human Environment Review*, 4.
- Nawi, M. N. M., Pozin, M. A. A., Kamar, K. A. M. K., Lee, A., & Harun, A. N. (2018). The Global Adoption of Industrialised Building System (IBS): Lessons Learned. *The Journal of Social Sciences Research, SPI6*, 1272–1278.
<https://doi.org/10.32861/jssr.spi6.1272.1278>
- Rahim, A. A., & Qureshi, S. L. (2018). A Review of IBS Implementation in Malaysia and Singapore. 11.
- Samad, R. A., Usman, I. M. S., & Raman, S. N. (2020). A review on construction of additional building school using Industrialized Building System (IBS) in Sarawak, Malaysia. 11.
- Santoso, T. P., Trigunarsyah, B., Hassanain, M. A., & Tuffaha, F. (2017). Industrialized Building Systems for the Kingdom of Saudi Arabia. 7.
- Shafie, M. S. B. (2020). Challenges or Constraints in The Implementation of Industrialised Building System For Projects Under Jabatan Kerja Raya Negeri Perak. 24.
- Tarang, V. A. T., Mohammad, M. F., Akbar, A. R. N., & Mohamed, M. R. (2022). Pertinent Internal and External Issues in Industrialised Building System (IBS) Construction Business in Malaysia. *Built Environment Journal*, 19(1), 32.
<https://doi.org/10.24191/bej.v19i1.15990>
- Zainordin, N., Ismail, S., Omar, A. F., (2023), Critical Success Factors (CSF) Of Sustainability Implementation In Malaysia, *Malaysia Construction Research Journal (MCRJ)*, Special Issues, Vol. 18, No 1.

This page intentionally left blank

EXPLORING THE SYNERGY BETWEEN DIGITALISATION AND SUSTAINABILITY: INSIGHTS FROM MALAYSIAN QUANTITY SURVEYORS

Sui Lai Khoo¹, Nadzirah Zainordin¹, Norshakila Muhamad Rawai¹, Mohammad Reizal Mohammad Ali² and Edna Bujang Safawi³

¹Faculty of Engineering, Technology & Built Environment, School of Architecture & Build Environment, UCSI University, KL campus, Kuala Lumpur, MALAYSIA

²Senior Special Duties Officer, Head of Estate, Ministry of Home Affairs, Bandar Seri Begawan, BRUNEI

³CYPE Ingenieros, S.A, N-0-11, Pusat Perdagangan Kuchai No. 2, Jalan 1/127, Off Jalan Kuchai Lama, Kuchai Business Park, 58200 Kuala Lumpur, MALAYSIA

Abstract

The integration of digitalisation in the construction industry has become a key driver of sustainability, enabling more efficient resource management, and reducing environmental impact. Quantity Surveyors (QS) play a crucial role in ensuring that digital advancements align with sustainable construction practices, particularly in cost management and project efficiency. This study explores the synergy between digitalisation and sustainability from the perspective of Malaysian QS professionals, highlighting the impact, challenges, and opportunities of adopting digital tools in sustainable construction. The research aims to examine how digital technologies such as Building Information Modelling (BIM), Artificial Intelligence (AI), and blockchain contribute to sustainability, identify the barriers faced by QS professionals in implementing digital solutions, and provide insights into their role in promoting cost efficiency and waste reduction. Findings indicate that while digitalisation enhances sustainability by improving cost forecasting, resource optimisation, and environmental performance, challenges such as high implementation costs, skill gaps, and resistance to change hinder widespread adoption. The study concludes that industry-wide training programs, policy incentives, and collaborative initiatives are essential to support QS professionals in leveraging digitalisation for sustainability. These insights provide valuable implications for policymakers, industry stakeholders, and QS practitioners in driving Malaysia's construction industry towards a more sustainable and digitally integrated future.

Keyword: *Digitalisation; Sustainability; Quantity Surveyors; Building Information Modelling (BIM); Artificial Intelligence (AI); Blockchain; Cost Management; Sustainable Construction; Malaysian Construction Industry*

INTRODUCTION

Digitalisation has emerged as a transformative force in the construction industry, revolutionising project execution, cost management, and sustainability practices (Zainordin, N. et al., 2024a; Guo et al., 2022). Technologies such as Building Information Modelling (BIM), Artificial Intelligence (AI), blockchain, digital twins, and the Internet of Things (IoT) have significantly enhanced resource optimisation and real-time decision-making (Shen et al., 2021). As a result, the role of Quantity Surveyors (QS) has evolved beyond traditional cost estimation to incorporate sustainability-driven decision-making, particularly in life cycle costing, carbon footprint assessment, and resource efficiency analysis (Olawumi & Chan, 2018).

The integration of digital tools, including BIM and AI-powered cost estimation, empowers QS professionals to improve cost accuracy and minimise environmental impact (Ding et al., 2020). However, widespread adoption of digital technologies in the QS

profession is hindered by several challenges, such as limited technical expertise, high implementation costs, and resistance to change (Perera et al., 2020). While existing studies highlight the potential benefits of digitalisation in enhancing sustainability, there remains a lack of empirical research on how QS professionals in Malaysia are leveraging these technologies (Mohd-Rahim et al., 2021). Addressing this knowledge gap is crucial to informing industry policies and developing professional training programs. This study aligns with previous research that underscores the urgent need for a digital transformation strategy in the QS profession to support sustainable construction practices (Zainordin, N. et al., 2024a; Ismail et al., 2022).

Literature Review

Definition and Key Concepts

Digitalisation in construction refers to the integration of advanced digital technologies to optimise processes, improve efficiency, and enhance decision-making across a project's life cycle (Guo et al., 2022). Unlike traditional construction methods, digitalisation facilitates real-time collaboration, predictive analytics, and automated project management, leading to more informed decision-making and reduced project risks (Zainordin, N. et al., 2024a; Shen et al., 2021). This transformation is driven by data-driven tools, automation, and digital workflows, which collectively enhance productivity, reduce costs, and support sustainability objectives. The shift towards digital construction is crucial in addressing contemporary challenges in the built environment, including inefficiencies, material wastage, and environmental concerns.

Technologies in Digital Construction

The rapid advancement of technology has revolutionised the construction industry, introducing innovative tools and systems that drive digital transformation. These technologies not only enhance project delivery but also contribute to sustainable development by optimising resource management, minimising waste, and improving overall efficiency. Among the most significant digital innovations are Building Information Modelling (BIM), Artificial Intelligence (AI), the Internet of Things (IoT), Blockchain Technology, and Digital Twin Technology, each of which plays a vital role in modernising construction processes. Building Information Modelling (BIM) has emerged as a fundamental tool in digital construction, offering a comprehensive digital representation of a building's physical and functional characteristics. By enabling virtual modelling and simulation, BIM enhances design coordination, clash detection, and resource optimisation (Ding et al., 2020). This technology allows construction professionals to assess energy efficiency and environmental impact before actual project execution, reducing costly rework and ensuring better sustainability outcomes.

Similarly, Artificial Intelligence (AI) is transforming the construction industry by improving predictive cost estimation, risk analysis, and automated decision-making (Zainordin, N. et al., 2024a). Through machine learning algorithms, AI-driven applications can analyse vast datasets to minimise material waste, enhance project sustainability, and optimise construction schedules (Perera et al., 2020). The ability of AI to predict potential risks and inefficiencies enables proactive decision-making, reducing delays and cost

overruns. Another transformative technology is the Internet of Things (IoT), which facilitates real-time monitoring of construction sites through interconnected sensors and smart devices (Zainordin, N. et al., 2024a). These sensors track material usage, energy consumption, and environmental conditions, ensuring compliance with sustainability standards and promoting resource efficiency (Olawumi & Chan, 2018). By providing real-time insights, IoT enhances safety measures, improves productivity, and supports the industry's transition toward smart construction.

In addition to IoT, Blockchain Technology is redefining transparency and accountability within the construction sector. As a decentralised digital ledger, blockchain strengthens security and trust in construction contracts, procurement, and payments. It ensures secure transactions, ethical sourcing of sustainable materials, and reduces fraud risks, thereby fostering greater integrity in the supply chain (Ismail et al., 2022). The immutable nature of blockchain records also enhances legal compliance and minimises disputes related to contractual obligations. Another ground-breaking innovation is Digital Twin Technology, which creates a virtual replica of a physical structure, allowing for real-time simulations, predictive maintenance, and performance monitoring (Zainordin, N. et al., 2024b). This technology enhances energy efficiency and resource management, enabling construction professionals to simulate various scenarios and optimise building performance before physical implementation (Mohd-Rahim et al., 2021). By providing a data-driven approach to construction and facility management, digital twins contribute to the industry's long-term sustainability goals (Zainordin, N. et al., 2024b). Collectively, these digital tools play an instrumental role in modern construction, fostering greater accuracy, efficiency, and sustainability throughout a project's lifecycle. As the construction industry continues to embrace digital transformation, the integration of these technologies will be crucial in shaping a more sustainable and resilient built environment.

Benefits and Challenges of Digitalization

The adoption of digital technologies in the construction industry has the potential to transform project delivery by enhancing efficiency, reducing costs, and promoting sustainability. However, despite its numerous advantages, digitalisation also presents challenges that must be addressed for successful implementation. While the long-term benefits outweigh the difficulties, overcoming barriers such as high implementation costs, skill gaps, and resistance to change remains crucial for widespread digital adoption in the sector. One of the most significant advantages of digitalisation in construction is enhanced efficiency. The integration of automation and digital workflows reduces human errors, improves project coordination, and accelerates construction timelines (Guo et al., 2022). By leveraging real-time collaboration tools and predictive analytics, construction teams can optimise project planning, minimise delays, and ensure smoother execution of tasks.

Another key benefit is cost savings, as digital technologies improve financial planning and budget management. Advanced cost estimation tools and real-time budget tracking provide more accurate financial forecasts, minimising budget overruns and ensuring better resource allocation (Zainordin, N. et al., 2024b; Shen et al., 2021). Through data-driven insights, project managers can make more informed decisions, reducing unnecessary expenditures and optimising material usage. Furthermore, digitalisation plays a crucial role in promoting sustainability within the built environment. By minimising material waste,

optimising energy consumption, and facilitating the use of eco-friendly materials, digital tools help reduce the overall carbon footprint of construction projects (Ding et al., 2020). Technologies such as Building Information Modelling (BIM), the Internet of Things (IoT), and Digital Twin Technology support sustainable design and construction by enabling energy-efficient building performance assessments before actual construction begins.

Despite its advantages, digitalisation also presents several challenges that hinder its widespread adoption. One of the most significant barriers is high implementation costs. The initial investment in software, hardware, and workforce training can be substantial, particularly for small and medium-sized enterprises (SMEs) that may struggle with financial constraints (Perera et al., 2020). Many companies are hesitant to adopt digital tools due to concerns about return on investment and the long learning curve associated with new technologies. Another major challenge is the skill gap and lack of technical expertise among construction professionals. Many industry practitioners lack the necessary digital skills to fully utilise technologies such as BIM, AI, and blockchain, creating a knowledge gap in the sector (Mohd-Rahim et al., 2021). Without adequate training and education, the potential benefits of digitalisation cannot be fully realised, limiting its impact on the construction industry.

Additionally, resistance to change remains a persistent issue in the industry. The construction sector has traditionally relied on conventional methods, and many stakeholders are reluctant to embrace new technologies due to perceived risks and uncertainties (Ismail et al., 2022). Overcoming this resistance requires a shift in mindset, strong leadership, and strategic policies that promote digital adoption as a standard practice. While digitalisation presents several challenges, its long-term benefits in efficiency, cost management, and sustainability make it a critical component of future construction practices (Zainordin, N. et al., 2024b). Addressing barriers such as high implementation costs, skill gaps, and resistance to change through investment in training, government support, and industry-wide digitalisation policies will ensure that the construction sector can fully leverage technological advancements. As the industry continues to evolve, embracing digital transformation will be essential in shaping a more efficient, cost-effective, and sustainable built environment.

Sustainability in the Built Environment

Sustainability in the built environment has become an essential aspect of modern construction, emphasising the need to balance economic growth with environmental preservation and social well-being. As global concerns over climate change, resource depletion, and urbanisation intensify, sustainable construction practices are increasingly recognised as fundamental to ensuring long-term resilience and liveability in cities. By adopting sustainable principles, the construction industry can minimise negative impacts while maximising benefits for communities and future generations.

Definition and Principles of Sustainability

Sustainability in the built environment refers to the minimisation of environmental, social, and economic impacts associated with construction activities, while simultaneously enhancing long-term benefits for communities and stakeholders (Olawumi & Chan, 2018). This concept is often framed within three key dimensions:

1. **Environmental Sustainability** – This dimension focuses on reducing carbon emissions, energy consumption, and waste generation while promoting renewable energy sources and sustainable building materials. Environmentally sustainable construction integrates energy-efficient designs, green technologies, and eco-friendly materials to mitigate environmental degradation.
2. **Social Sustainability** – This aspect emphasises creating safe, inclusive, and healthy built environments that cater to the well-being of communities. It considers factors such as labor rights, public health, accessibility, and social equity, ensuring that construction projects contribute positively to society by fostering liveable and resilient spaces.
3. **Economic Sustainability** – This dimension ensures cost-effective solutions, resource efficiency, and long-term affordability in construction projects. The goal is to achieve financial viability without compromising environmental or social integrity (Shen et al., 2021). Economic sustainability also encourages the use of life cycle costing (LCC) and value-driven design approaches to ensure sustainable investment returns.

By integrating these three dimensions, sustainable construction aims to create a built environment that is resilient, energy-efficient, and beneficial to both present and future generations.

Sustainability Initiatives in Malaysia

Recognising the need for sustainable development, Malaysia has implemented several national frameworks and certification programs to promote green construction. These initiatives serve as regulatory benchmarks to encourage sustainable practices, improve environmental performance, and drive green innovation in the construction industry. Some of the key sustainability initiatives in Malaysia include:

1. **Construction Industry Development Board (CIDB) Sustainable Infrastructure Rating** – This national framework evaluates infrastructure sustainability based on environmental, social, and economic criteria. It provides guidance for developers and policymakers in ensuring that infrastructure projects align with sustainability goals and climate action strategies (CIDB Malaysia, 2020).
2. **Green Building Index (GBI)** – As Malaysia's leading green certification system, GBI assesses buildings based on energy efficiency, indoor environmental quality, sustainable site planning, and material use. GBI-certified buildings are designed to reduce energy consumption, water usage, and carbon emissions, contributing to a greener and more sustainable built environment (GBI Malaysia, 2019).
3. **Low Carbon Cities Framework (LCCF)** – This initiative aims to reduce carbon emissions through smart urban planning, energy-efficient building designs, and green infrastructure. It aligns with Malaysia's commitment to climate change mitigation by promoting low-carbon urban development strategies (Malaysian Green Technology and Climate Change Centre, 2021).

These sustainability initiatives reflect Malaysia's commitment to fostering a greener and more resilient built environment. By adopting sustainable construction practices, enhancing policy frameworks, and encouraging industry-wide participation, Malaysia is paving the way for a more environmentally responsible and future-ready construction sector.

The Role of Quantity Surveyors in Digitalization and Sustainability

As the construction industry embraces digitalisation and sustainability, the role of Quantity Surveyors (QS) has evolved beyond traditional cost management. QS professionals are now instrumental in integrating digital tools and sustainable practices to enhance project efficiency, financial transparency, and environmental responsibility. By leveraging advanced technologies such as Building Information Modelling (BIM), Artificial Intelligence (AI), Internet of Things (IoT), and blockchain, QS professionals contribute to a more data-driven, efficient, and sustainable built environment.

How QS Professionals Contribute to Digital Transformation

The adoption of digital technologies has transformed the way QS professionals manage construction projects, particularly in the areas of cost estimation, procurement, contract administration, and risk management. Traditionally, cost estimation and financial planning relied on manual calculations and historical data; however, digitalisation now allows for real-time, automated, and highly accurate cost forecasting.

1. Building Information Modelling (BIM) – QS professionals utilise BIM-integrated cost estimation tools to extract accurate material quantities, analyse cost variations, and optimise budget allocation. BIM enhances design coordination and clash detection, reducing costly errors and rework, which ultimately supports sustainable resource management (Ding et al., 2020).
2. Artificial Intelligence (AI) – AI-driven algorithms assist in predictive cost estimation and risk analysis, allowing QS professionals to anticipate financial risks, optimise project cash flow, and improve cost control measures. By automating repetitive tasks, AI enhances efficiency and enables QS professionals to focus on strategic decision-making (Perera et al., 2020).
3. Blockchain Technology – Blockchain facilitates secure and transparent transactions in procurement, contract administration, and payment verification. This decentralised ledger system reduces fraud, ensures ethical sourcing of materials, and enhances accountability throughout the construction supply chain (Ismail et al., 2022).

By integrating these digital tools, QS professionals enhance the financial and contractual management of projects, ensuring improved decision-making, cost efficiency, and sustainability compliance.

Cost Management and Life Cycle Assessment for Sustainable Projects

A critical responsibility of QS professionals in sustainable construction is Life Cycle Costing (LCC), which assesses the total cost of ownership over a building's lifespan. LCC considers factors such as initial construction costs, operation and maintenance expenses, energy consumption, and end-of-life disposal, ensuring that financial decisions align with long-term sustainability goals (Mohd-Rahim et al., 2021).

The integration of digitalisation in LCC significantly improves the accuracy and effectiveness of sustainability assessments:

1. IoT-Enabled Data Collection – IoT sensors provide real-time monitoring of material usage, energy consumption, and environmental performance, enabling QS professionals to make data-driven cost evaluations and sustainability recommendations.
2. AI-Powered Predictive Analytics – AI algorithms analyse historical data and forecast long-term cost implications, allowing QS professionals to optimise resource allocation and select cost-effective, eco-friendly materials (Guo et al., 2022).

By incorporating digitalisation into cost management and sustainability assessments, QS professionals play a crucial role in driving environmentally responsible and financially viable construction practices. Their expertise ensures that projects are not only cost-effective but also aligned with global sustainability objectives, reinforcing the importance of QS in the digital era.

Synergy between Digitalization and Sustainability

The convergence of digitalisation and sustainability is revolutionising the construction industry by promoting resource efficiency, environmental responsibility, and data-driven decision-making. Digital tools enable real-time monitoring, predictive analytics, and process automation, which contribute to sustainable construction practices and the reduction of environmental impact. The adoption of digitalisation ensures that construction projects are not only cost-efficient and productive but also aligned with global sustainability goals.

How Digital Tools Enhance Sustainable Practices

The integration of digital technologies has significantly improved the industry's ability to implement and measure sustainable construction practices. Key digital tools that support sustainability include:

1. Building Information Modelling (BIM) – BIM enhances green building design by enabling simulations of energy performance, material selection, and carbon footprint assessment. Through clash detection and optimised design coordination, BIM reduces material waste and supports energy-efficient building solutions (Shen et al., 2021).
2. Artificial Intelligence (AI) – AI-powered predictive analytics play a crucial role in forecasting material needs, minimising resource wastage, and optimising procurement strategies. AI-driven decision-making allows for better material selection, cost control, and reduced environmental impact (Ding et al., 2020).
3. Internet of Things (IoT) Monitoring – IoT sensors enable real-time tracking of energy and resource consumption, ensuring that buildings and construction sites operate efficiently and comply with sustainability standards. By monitoring water usage, electricity consumption, and environmental conditions, IoT contributes to energy conservation and carbon footprint reduction (Olawumi & Chan, 2018).
4. Blockchain Technology – Blockchain enhances transparency and accountability in construction supply chains, ensuring ethical sourcing of materials and secure financial transactions. By reducing fraud and inefficiencies, blockchain promotes responsible procurement and minimises the environmental impact of construction activities (Ismail et al., 2022).

5. Digital Twin Technology – Digital twins serve as virtual replicas of physical structures, allowing real-time simulations and environmental impact assessments before construction begins. This technology supports predictive maintenance, energy optimisation, and life cycle assessment, making it a powerful tool for achieving sustainable urban development (Mohd-Rahim et al., 2021).

By integrating these digital innovations, the construction industry can achieve a balance between efficiency, cost-effectiveness, and environmental stewardship. Digitalisation empowers industry professionals to make data-driven sustainability decisions, ensuring that future construction projects are resilient, environmentally responsible, and aligned with global climate action goals.

METHODOLOGY

The research methodology outlines the approach, data collection techniques, and analytical methods employed to investigate the synergy between digitalisation and sustainability in the Malaysian construction industry, with a specific focus on Quantity Surveyors (QS) professionals. A well-structured methodology ensures the reliability and validity of the study's findings (Creswell & Creswell, 2018).

Research Design

This study adopts a mixed-methods approach, integrating both quantitative and qualitative research methods to provide a comprehensive understanding of digitalisation's role in promoting sustainable construction practices (Bryman, 2016). The quantitative component involves collecting numerical data to measure the extent of digital adoption, its impact on cost management, and sustainability outcomes. Meanwhile, the qualitative component captures in-depth insights from QS professionals regarding challenges, opportunities, and best practices in digital construction (Creswell, 2014).

Data Collection

To ensure a robust and diverse dataset, multiple data collection methods are employed:

Surveys

A structured questionnaire is distributed to Malaysian Quantity Surveyors to gather quantitative data on digital tool adoption, perceived benefits, and challenges in integrating sustainability (Denscombe, 2017). The survey includes:

- Likert-scale questions to assess attitudes toward digitalisation.
- Multiple-choice questions to capture demographic and professional information.
- Open-ended responses for broader insights into real-world experiences with digital tools.

Interviews

Semi-structured interviews are conducted with experienced QS professionals, construction stakeholders, and sustainability experts to provide qualitative insights into industry experiences, digital transformation trends, and sustainability best practices (King et al., 2019). These interviews help to:

- Contextualize survey findings with practical industry perspectives.
- Explore emerging themes in digital construction.
- Identify barriers and enablers of digital adoption.

Case Studies

Real-world case studies of Malaysian construction projects that have successfully integrated digitalisation and sustainability are analysed (Yin, 2018). These case studies highlight:

- Best practices in adopting digital tools for cost management and sustainability.
- Lessons learned from project implementation.
- Measurable impacts on cost efficiency, waste reduction, and project sustainability.

Data Analysis Methods

The collected data undergoes systematic analysis using both statistical and thematic techniques to derive meaningful conclusions (Silverman, 2020).

Quantitative Analysis

Survey data is analysed using descriptive and inferential statistics, such as:

- Frequency distributions to understand digital adoption rates.
- Mean comparisons to assess the impact of digital tools.
- Correlation analysis to examine relationships between digitalisation and sustainability outcomes (Field, 2018).
- Statistical software such as SPSS or NVivo may be used for data processing and interpretation.

Qualitative Analysis

Interview transcripts and open-ended survey responses are analysed using thematic analysis, where emerging themes related to digitalisation, sustainability, cost management, and QS roles are identified (Braun & Clarke, 2006). This ensures a rich, contextual understanding of industry perspectives.

Case Study Evaluation

A comparative analysis of best-practice projects is conducted to assess the effectiveness of digital tools in enhancing sustainable construction. This helps in:

- Identifying key success factors in digital integration.
- Providing practical recommendations for future industry adoption.

By employing this mixed-methods approach, the study ensures a comprehensive and well-rounded investigation, bridging quantitative metrics with qualitative industry insights to enhance understanding of digitalisation’s role in sustainable construction practices.

FINDINGS AND DISCUSSION

This section presents the key findings from the study, derived from survey responses, interviews, and case studies. The results provide insights into the impact of digitalisation on sustainability in Quantity Surveying (QS) practices, as well as the challenges and potential solutions for industry-wide adoption (Table 1).

Table 1. Challenges and Potential Solutions

Challenges	Potential Solutions
High Implementation Costs	Government incentives and funding for SMEs (CIDB Malaysia, 2020).
Skill Gaps and Training Needs	Incorporating digital skills training into QS education (GBI Malaysia, 2019).
Resistance to Change	Industry-wide awareness campaigns and pilot programs (Ismail et al., 2022).

Analysis of Survey and Interview Results

The survey responses and interview data highlight widespread recognition of digitalisation as a key enabler of sustainability in the construction industry. However, the extent of adoption varies, with larger firms demonstrating greater integration of Building Information Modelling (BIM), Artificial Intelligence (AI), and Internet of Things (IoT) compared to small and medium-sized enterprises (SMEs). The findings indicate the following trends:

1. Adoption of Digital Tools
 - 80% of respondents reported using at least one digital tool in their QS practices, with BIM (65%) and AI-powered cost estimation (52%) being the most used.
 - Blockchain and Digital Twin Technologies showed lower adoption rates (20% and 18%, respectively) due to high implementation costs and limited technical expertise.
2. Perceived Benefits of Digitalization
 - Cost savings: 70% of respondents agreed that digital tools improve cost management by reducing errors in cost estimation and procurement.
 - Efficiency: 68% reported that automation and AI-driven analytics enhanced project planning and resource allocation.

- Sustainability: 57% indicated that digital tools help minimise waste and improve material efficiency, aligning with green building objectives.

3. Challenges to Digitalization

- High Initial Costs: 55% of QS professionals identified financial constraints as a major barrier to adopting advanced digital technologies.
- Skill Gaps: 48% of respondents cited a lack of digital expertise as a key challenge, particularly in SMEs.
- Resistance to Change: 40% of participants mentioned organisational reluctance and preference for traditional QS methods as obstacles to digital transformation.

Key Themes Emerging from Data

Digitalisation as a Driver of Sustainable QS Practices

Findings from the interviews indicate that digital tools significantly contribute to sustainability by:

- Enhancing energy-efficient designs through BIM simulations (Shen et al., 2021).
- Reducing material waste via AI-driven predictive analytics (Ding et al., 2020).
- Monitoring energy and resource consumption in real-time using IoT sensors (Olawumi & Chan, 2018).

These findings align with case study evaluations, where projects implementing digital solutions demonstrated a 20–30% reduction in material waste and energy consumption.

The Role of Quantity Surveyors in Digital Transformation

Interviews with senior QS professionals revealed that digitalisation enhances the role of QS in sustainable construction by:

- Improving cost forecasting and risk assessment through AI-powered analytics (Perera et al., 2020).
- Enhancing transparency and accountability using blockchain for contract and payment verification (Ismail et al., 2022).
- Supporting life cycle cost analysis (LCC) with real-time data integration, allowing for informed decision-making on material selection and long-term sustainability (Mohd-Rahim et al., 2021).

Experts emphasised that collaborations between academia, industry, and policymakers are essential to overcoming these barriers and ensuring wider adoption of digital tools in QS practices.

How Digitalization Impacts Sustainability in QS Practices

The findings confirm that digitalisation and sustainability are interlinked, with digital tools playing a crucial role in:

- Optimising cost management while reducing environmental impact.
- Enhancing data-driven decision-making for sustainable material selection.
- Minimising risks and inefficiencies in QS workflows.

Despite the challenges, the study suggests that the long-term benefits of digitalisation outweigh its initial costs, making it a critical component of future QS practices.

CONCLUSION AND RECOMMENDATIONS

This study explored the synergy between digitalisation and sustainability in the Malaysian construction industry, with a specific focus on Quantity Surveyors (QS) professionals. The findings confirm that digital transformation is a key enabler of sustainable construction, as technologies such as Building Information Modelling (BIM), Artificial Intelligence (AI), the Internet of Things (IoT), blockchain, and digital twins significantly enhance cost management, resource efficiency, and environmental sustainability.

Survey and interview results indicate that a majority of QS professionals recognise the benefits of digitalisation, particularly in reducing material waste, improving project cost estimation, and enhancing decision-making for sustainable construction. However, the study also highlights key barriers to digital adoption, including high implementation costs, skill gaps, and resistance to change. These challenges suggest that while digitalisation holds immense potential, strategic interventions are required to facilitate wider adoption across the industry.

Overall, the study emphasises that digitalisation and sustainability are interdependent, and integrating digital tools into QS practices is essential for driving innovation, improving efficiency, and supporting Malaysia's long-term green building agenda. Despite the challenges, proactive efforts by policymakers, industry leaders, and academia can accelerate digital transformation, ensuring a more sustainable and data-driven construction sector.

To ensure the effective integration of digitalisation and sustainability in the Malaysian construction industry, particularly within Quantity Surveying (QS) practices, several strategic recommendations are proposed. These recommendations focus on industry and government support, education and skills development, enhanced collaboration, and future research directions to address current challenges and promote widespread adoption of digital tools.

The successful adoption of digital technologies in construction requires strong industry and government support. Government agencies, such as the Construction Industry Development Board (CIDB) Malaysia, should introduce financial incentives and funding programs to assist small and medium-sized enterprises (SMEs) in adopting digital tools (CIDB Malaysia, 2020). Many SMEs face significant financial constraints in implementing Building Information Modelling (BIM), Artificial Intelligence (AI), blockchain, and the Internet of Things (IoT), making government support essential for fostering digital transformation.

In addition to financial assistance, mandatory digital adoption policies should be introduced, particularly in public construction projects. Government-led projects serve as a model for private sector initiatives and can help accelerate the integration of digitalisation and

sustainability. Establishing digitalisation requirements in procurement processes, contract administration, and project management can ensure that the entire industry moves towards a more technologically advanced and sustainable future.

A major barrier to digital transformation in the QS profession is the lack of digital literacy and technical expertise among practitioners. To address this, higher education institutions should integrate digital skills training into QS programs, equipping future professionals with the ability to use BIM, AI, blockchain, and other emerging technologies effectively (GBI Malaysia, 2019). Digital literacy should become an essential component of Quantity Surveying curricula, ensuring that graduates enter the workforce with strong competencies in digital tools for cost management and sustainability analysis.

Additionally, Continuous Professional Development (CPD) programs offered by professional bodies such as the Royal Institution of Surveyors Malaysia (RISM) and the Board of Quantity Surveyors Malaysia (BQSM) should be expanded to include specialised training in digital methodologies. These programs can help practising QS professionals stay updated on industry advancements and develop the necessary skills to leverage digital tools for enhanced efficiency and sustainability.

The successful integration of digitalisation and sustainability requires strong collaboration between academia, industry, and government bodies. Strengthening industry-academia partnerships can facilitate research on digital sustainability in QS practices, leading to the development of customised digital solutions for the construction sector. Collaborative efforts can also promote knowledge sharing, best practices, and innovation, enabling the industry to transition towards a more data-driven and eco-friendly approach.

Furthermore, awareness campaigns should be conducted to highlight the benefits of digitalisation in sustainable construction. Many construction professionals, particularly those from traditional backgrounds, remain hesitant to adopt digital solutions due to misconceptions about cost and complexity. By organising seminars, workshops, and public engagement initiatives, stakeholders can be educated on how digital tools improve cost efficiency, reduce waste, and enhance sustainability (Ismail et al., 2022). Increasing awareness can reduce resistance to change and encourage wider industry adoption of digital technologies.

To further advance digitalisation in sustainable QS practices, additional research is necessary. One crucial area of exploration is the long-term cost-benefit analysis of digital tools in sustainable construction. While digital adoption requires significant initial investment, its long-term impact on cost savings, efficiency, and environmental sustainability remains a key area for further investigation.

Additionally, case studies of successful digital integration in Malaysian construction projects can provide practical models for industry-wide adoption. Examining real-world applications of BIM, AI, and blockchain in cost management, procurement, and sustainability assessment can offer valuable insights into best practices and potential challenges.

Finally, research should also focus on the role of emerging technologies, such as 5G-enabled IoT and advanced AI models, in enhancing QS efficiency and sustainability. The rapid evolution of smart construction technologies presents new opportunities for real-time

data analytics, predictive maintenance, and automated decision-making, which could further revolutionise the construction industry's approach to sustainability.

By implementing these recommendations, the Malaysian construction industry can overcome existing challenges and fully leverage digitalisation for sustainable development. Through strategic investments, enhanced education, and collaborative initiatives, the QS profession can play a pivotal role in driving digital transformation and ensuring a greener, more efficient built environment. Ultimately, the integration of digitalisation and sustainability will contribute to the nation's long-term goals of reducing carbon emissions, optimising resource efficiency, and fostering innovation in construction practices.

REFERENCES

- Braun, V., & Clarke, V. (2006). *Using thematic analysis in psychology. Qualitative Research in Psychology*, 3(2), 77-101.
- Bryman, A. (2016). *Social research methods* (5th ed.). Oxford University Press.
- CIDB Malaysia. (2020). *Sustainable infrastructure rating framework*.
- CIDB Malaysia. (2020). Sustainable infrastructure rating tool. *Construction Industry Development Board Malaysia*.
- Creswell, J. W. (2014). *Research design: Qualitative, quantitative, and mixed methods approaches* (4th ed.). SAGE Publications.
- Creswell, J. W., & Creswell, J. D. (2018). *Research design: Qualitative, quantitative, and mixed methods approaches* (5th ed.). SAGE Publications.
- Denscombe, M. (2017). *The good research guide: For small-scale social research projects* (6th ed.). Open University Press.
- Ding, L., Wang, X., & Zou, P. X. W. (2020). BIM-based sustainable building design and optimisation: A review. *Automation in Construction*, 113, 103142.
- Field, A. (2018). *Discovering statistics using IBM SPSS statistics* (5th ed.). SAGE Publications.
- Guo, H., Li, H., & Skitmore, M. (2022). Digital transformation in construction: Benefits, challenges, and future trends. *Journal of Construction Engineering and Management*, 148(2), 04021168.
- Guo, H., Yang, J., & Skitmore, M. (2022). Digital transformation in the construction industry: Trends, challenges, and research directions. *Journal of Construction Engineering and Management*, 148(5), 04022015. [https://doi.org/10.1061/\(ASCE\)CO.1943-7862.0002275](https://doi.org/10.1061/(ASCE)CO.1943-7862.0002275)
- Ismail, N. A., Ahmad, R., & Rahman, H. A. (2022). The role of digitalisation in the quantity surveying profession: Challenges and future prospects. *Journal of Quantity Surveying and Construction Management*, 3(2), 45-60.
- Mohd-Rahim, F. A., Zainon, N., & Othman, R. (2021). Life cycle costing for sustainable construction: A review of digital tools and approaches. *International Journal of Construction Management*, 21(4), 455-472.
- Olawumi, T. O., & Chan, D. W. M. (2018). A scientometric review of global research on sustainability and sustainable development. *Journal of Cleaner Production*, 183, 231-250. <https://doi.org/10.1016/j.jclepro.2018.02.162>
- Perera, S., Nanayakkara, S., & Rodrigo, M. (2020). Barriers to digital transformation in the construction industry: A critical review. *Construction Innovation*, 20(3), 421-444.

- Shen, L., Zhang, Z., & Wang, X. (2021). Smart construction and sustainability: The role of AI, IoT, and blockchain in green building practices. *Sustainable Cities and Society*, 65, 102602.
- Shen, L., Zhang, Z., & Zhu, Y. (2021). *Digital construction and sustainability: An integrated approach*. *Sustainable Cities and Society*, 69, 102835.
- Silverman, D. (2020). *Interpreting qualitative data* (6th ed.). SAGE Publications.
- Yin, R. K. (2018). *Case study research and applications: Design and methods* (6th ed.). SAGE Publications.
- Zainordin, N., Salleh, S., Farsana, N., Omar, A.F., Ardana, P.D.H. (2024), Stoppage to the Implementation of Internet of Things (IoT) in Construction Projects: From Lens of Civil Engineers in the United Kingdom, 2024 5th International Conference on Artificial Intelligence and Data Sciences, AiDAS 2024 - Proceedings, 2024, pp. 191–202
- Zainordin, N., Khoo, S.L., Jusoh, Z.M., Arifah, I.D.C., Goh, K.C. (2024), Sustainable Smart City (SSC) Attributes Via Systematic Literature Review, Malaysian Construction Research Journal, 2024, 21(1 Special Issue), Pp. 212–224.

This page intentionally left blank

INTEGRATED OF SAFETY PERFORMANCE VIA PROJECT MANAGERS' COMPETENCIES IN GREEN CONSTRUCTION: A REVIEW OF ASSESSMENT COMPONENTS AND CONCEPTUAL FRAMEWORK

Jannatun Naemah Ismam, Ida Nianti Mohd Zin and Natasha Khalil

Department of Built Environment Studies and Technology, College of Built Environment, Universiti Teknologi MARA, Perak Branch, Seri Iskandar Campus, 32610 Perak, Malaysia

Abstract

The wide-ranging activities within the green construction sector encompass a variety of activities, from sourcing materials to their treatment, and utilizing them for construction, building execution and operation, and eventual demolition at the end of its lifespan. Throughout these processes, accidents, injuries, and even fatalities are common due to the intricate nature of certain tasks involved. These processes introduce new challenges in achieving optimal safety performance, which differs from conventional construction practices. The efforts to enhance safety standards in green construction often receive inadequate attention, possibly due to the new challenges faced by project managers in effectively implementing and enforcing safety protocols. This deficiency can lead to a neglect of safety standards. Thus, this paper attempts to develop project managers' competencies attributes in relation to safety performance in the green construction perspective. Accordingly, this study aims to propose a conceptual framework of project managers' competencies toward safety performance in green construction. Specifically, the objective is to identify the key components of safety performance and the relevant attributes of project managers' competencies. To support this, a systematic literature review was conducted following the Preferred Reporting Items for Systematic Reviews and Meta-Analyses (PRISMA) methodology, ensuring a transparent, replicable, and comprehensive approach to identifying, screening, and selecting relevant safety performance components for this study. Next, a review of the existing model and theory of competencies also conducted to identify the competency attributes. Through a comprehensive literature review conducted in this study, it was found that safety performance in green construction consists of five (5) interrelated components: 1) safety leading: participation; 2) safety leading: compliance; 3) safety leading: employer's commitment; 4) safety leading: effectiveness of control measures at the workplace; 5) safety lagging: number of accidents. Meanwhile, the project managers' competencies were comprised into three interrelationship attributes namely skills, knowledge, and attitudes.

Keywords: *Safety Performance; Green Construction; Project Manager; Competent*

INTRODUCTION

The construction industry is a major driver of economic growth that provides jobs and generates income for individuals and businesses. It represents approximately \$10 trillion of the global Gross Domestic Product (GDP) (Nnaji & Karakhan, 2020). Essentially, the construction industry covers a broad spectrum of activities that involve the extraction and acquisition of raw materials, the manufacturing and processing of building materials, the design, planning, and implementation of construction projects for buildings and various structures, along with their ongoing maintenance and eventual demolition (Darko et al., 2019; Li et al., 2022). However, over the past decade, the construction sector has faced consistent criticism due to its substantial environmental impact, particularly regarding the consumption of resources and the emission of greenhouse gases. Therefore, there is an urgent need to address the environmental impacts of the construction industry. As the world population continues to grow and urbanize, the demand for new buildings and infrastructure is also increasing, leading to an even greater

impact on the environment (Xie et al., 2022).

Construction firms are being encouraged to shift towards ecological modernization by adopting environmental management practices and technologies that can reduce their impact on the environment while also maintaining a level of economic development. This can include implementing recycling programs, using sustainable building materials, incorporating energy-efficient design, and pursuing green building certifications (Xie et al., 2022). Additionally, many countries have implemented regulations and standards that aim to reduce the environmental impact of the construction industry, such as LEED (Leadership in Energy and Environmental Design) certifications (Kalyana Chakravarthy et al., 2022). According to previous research conducted by Onubi et al. (2020a), it was suggested that prioritizing green construction site practices is crucial when aiming to mitigate the adverse effects of building activities on the natural environment. The green construction concept aims to develop buildings that utilize as few natural resources as possible during construction and operation. According to Hwang and Ng (2013), green construction projects in the construction industry may face greater challenges in terms of safety performance compared to conventional construction projects. These challenges are not clearly defined and pose significant concerns that require immediate attention. In addition, new hazards may arise that are not present in conventional construction projects. Additionally, Zhang & Mohandas (2020) emphasize the importance of addressing these safety concerns to ensure the successful implementation of green construction. It is crucial to prioritize safety performance in green construction due to the emergence of new hazards and considerations related to materials, technologies, site practices, and hazardous materials. By prioritizing safety, not only can environmental sustainability be promoted, but the well-being of workers and future occupants can also be protected.

SAFETY PERFORMANCE VIA PROJECT MANAGER'S COMPETENCIES IN GREEN CONSTRUCTION

Globally, the construction industry has earned a reputation as one of the most hazardous sectors, with safety in green construction often treated as a mere academic discussion due to the distinctive challenges it presents compared to conventional construction (Abdelkhalik & Azmy, 2022; Hwang et al., 2018; Zaini et al., 2022). Developed countries like Singapore have particularly focused on mitigating safety risks specific to green projects, noting a higher accident rate compared to traditional builds (Hwang et al., 2018; Li et al., 2022; Supriyatna et al., 2020). Considering the serious state of construction safety in Singapore and the ongoing construction of numerous green building projects in the country, it can be deduced that the safety conditions in the green building construction industry of Singapore are likely to be challenging or worrisome. This underscores the need to examine factors influencing safety performance in green construction. It supported by Dewlaney et al. (2012) who has discovered that contractors pursuing LEED certifications face increased safety risks, with workers exposed to hazards like working at heights, electrical currents, unstable soils, and heavy equipment (Li et al., 2022; Supriyatna et al., 2020). Additionally, Zhang and Mohandes (2020) and Mohandes and Zhang (2021) highlighted that common practices associated with green construction, such as the installation of solar panels, thermoplastic polyolefin, and noise isolation panels, introduce new safety risks in construction projects (Onubi et al., 2021). Attributes inherent to green construction, like the use of sustainable materials, may also contribute to schedule delays, safety incidents, and reduced productivity (Li et al., 2019). It is perceived that evaluating the

construction workforce engaged in green construction is essential to ensure that construction activities adhere to occupational health and safety (OHS) regulations (Durdyev et al., 2022).

According to Wang et al. (2022), key personnel in construction projects, such as project managers, chief supervision engineers, and safety officers, have the responsibility for upholding safety standards on construction sites. A project manager is tasked with delivering the project to meet the client's specified performance criteria. Therefore, the lack of familiarity with green technology among project managers may negatively impact safety outcomes (Hwang & Ng, 2013). Recent accidents, injuries, and fatalities on construction sites have highlighted the poor safety performance associated with green construction practices (Durdyev et al., 2022; Hwang, 2018; Onubi et al., 2020; Zhang & Mohandes, 2020). Despite technological advancements improving efficiency and productivity, they have also introduced new hazards on an unprecedented scale compared to traditional methods. Safe implementation of green construction practices requires a highly competent workforce proficient in hazard and risk management.

Previous studies have indicated that, although research on safety performance in green construction is not as extensive as that in traditional construction safety, it is a field that is continually developing. As sustainable construction practices become more prevalent, it will be essential to conduct further research to ensure that safety considerations evolve alongside advancements in green building technologies and methods. Therefore, it is critical to ensure that the construction workforce possesses the necessary skills and qualifications for green construction projects. Conducting a thorough evaluation of the competency of the construction workforce in green construction could be a valuable area for future research. The findings from such evaluations would offer insights into the strengths and areas for improvement in the current workforce's competency, assisting in the identification of strategies to promote safe and effective construction practices within the framework of sustainability.

Safety Performance

Safety performance serves as a critical measure of an organisation's effectiveness in safeguarding the well-being of individuals engaged in various aspects of construction, operation, and maintenance activities related to structures. It encompasses a broad spectrum of measures aimed at ensuring the safety and welfare of workers and other stakeholders involved in these processes. This includes the adoption of secure work practices, the use of safe equipment and materials, and the implementation of structural designs that prioritise the safety of both workers and the public. Moreover, safety performance entails compliance with relevant safety regulations and industry standards, alongside the provision of comprehensive training and education to workers on safe practices. By addressing these aspects, organizations can uphold high standards of safety across their operations, thereby minimizing risks and promoting a culture of safety within the construction industry (Syed-Yahya et al., 2022). Safety performance components play a crucial role for organizations in evaluating the effectiveness of their initiatives and risk management measures aimed at preventing workplace fatalities and injuries. By tracking these components, organizations gain valuable insights into the efficacy of their safety measures, enabling them to identify strengths and areas for improvement. This information empowers organizations to take proactive steps, such as implementing corrective actions and enhancing safety protocols, to foster a safer working environment. Ultimately, safety

performance components serve as a tool for organizations to prioritize safety, mitigate risks, and continuously improve their safety practices to protect the well-being of their workforce (Shaikh et al., 2020). A high level of safety performance indicates the efficiency and organization of the worksite, underscoring the importance of safety management activities. Conversely, safety performance can also refer to the actions or behaviours exhibited by individuals in various job roles, with the aim of safeguarding the well-being of workers, clients, the general public, and the environment. It encompasses proactive measures taken to ensure the well-being of all stakeholders involved. Both definitions highlight the critical role of safety in fostering a secure and healthy working environment (Mohamed, 2002; Nadhim et al., 2018).

Attributes of Project Managers' Competencies in Green Construction

Table 1. The Competency Attributes Used in Different Research Field

No	Title	Author (Year)	Knowledge	Skills	Core Personality Characteristics								Research Field
					Attitudes	Awareness	Self-concepts	Traits	Motivations	Ability	Image	Behaviour	
1.	Sustainable Safety Management: A Safety Competencies Systematic Literature Review	(Rahman et al., 2022)	√	√								√	Construction Industry
2.	The role of Competency in Safety Performance	(Salleh, 2017)	√	√	√								Petrochemical Industry
3.	The effect of safety risk management and airport personnel competency on aviation safety performance	(Majid et al., 2022)	√	√	√								Aviation Industry
4.	Certified Construction Project Manager (CCPM)	(CIDB, 2019)	√	√	√								Construction Industry
5.	Project Management Competence: Definitions, Models, Standards and Practical Implications	(Horváth, 2019)	√	√	√								Project Management
6.	Acquiring competences for the didactic profession	(Kelemen, 2012)	√		√					√			Education
7.	Profiling the competent project manager	(Crawford, 2000)	√	√	√	√	√	√	√	√	√	√	Project Management
8.	Competence at work: models for superior performance	(Spencer & Spencer, 1993)	√	√				√	√	√	√	√	Human Research Management

Competencies, as defined by Jabar et al. (2013) and Kelemen (2012), encompass three interrelated attributes: Knowledge, Skills, and Attitudes. However, it's important to acknowledge that the specific elements comprising competencies can vary depending on the theoretical framework or model utilized. Some studies, such as those by Rahman et al. (2022); Ahmad Latiffi & Zulkiffli (2020) and Moradi et al. (2020) have highlighted only two elements of competencies, namely Skills and Knowledge. Moreover, previous research consistently underscores the importance of both Skills and Knowledge as crucial attributes for ensuring effective performance. However, CIDB (2019) has defined competency as the combination of Knowledge, Skills, and Attitude (KSA). In the current study, the attributes of competency were developed based on Crawford's integrated model of competence. Refer to Table 1, these

attributes have been empirically supported as fundamental components of competence by researchers such as Majid et al. (2022); Salleh (2017); Crawford (2005); Horváth (2019); Jabar et al. (2013); Kelemen (2012) and Spencer & Spencer (1993). These attributes are recognised to have a direct impact on assigned tasks and performance. Thus, this study adopted three interrelated competencies, namely knowledge, skills and attitudes, as key competencies for project managers in achieving safety performance in green construction.

METHODOLOGY

The purpose of this current review is to overcome the limitations of previous studies by investigating trends in research concerning safety performance in green construction. To accomplish this goal, the researchers adopted the Preferred Reporting Items for Systematic Reviews and Meta-Analyses (PRISMA) methodology. This approach entails formulating a specific research question, implementing systematic search strategies to gather relevant literature, evaluating the quality of the studies, and analysing the collected data (Khudzari et al., 2024). By adhering to PRISMA guidelines, the review aims to provide a comprehensive and structured analysis of the existing body of literature on safety performance in green construction (Ali et al., 2022; Moher et al., 2019; Page et al., 2021). The study was conducted between January 2023 and July 2023. The review focuses on three key aspects: the green construction (population), indicators (interest), and safety performance (context) (Stern et al., 2014) and aims to answer the following question: what are the components used in safety performance among practitioners in green construction?

Systematic Searching Strategies

The systematic searching methods procedure involves four primary stages: retrieval, screening, eligibility, and inclusion, as depicted in Figure 1. These stages adhere to the PRISMA guidelines and are essential for ensuring a rigorous and structured approach to gathering and selecting relevant literature for the review (Moher et al., 2019).

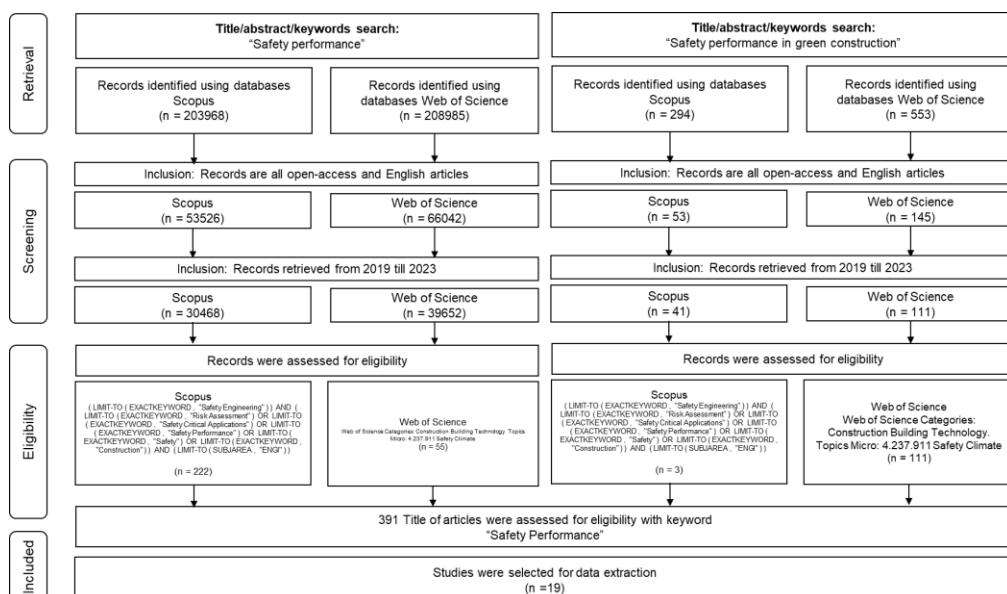


Figure 1. The Four (4) Primary Stages in The Systematic Searching Methods Procedure

Retrieval

The study utilized Scopus and Web of Science as primary databases for accessing scholarly articles due to their recognized reputation as reputable repositories of scientific publications. These platforms provide advanced search functionalities and access to a diverse array of scholarly resources. To retrieve relevant articles, the search focused on two primary domains: (1) "safety performance" and (2) "safety performance in green construction." The search string was carefully formulated to incorporate these terms within the fields of title, abstract, and keywords, ensuring a comprehensive retrieval of relevant literature.

Screening

During the screening process, all 70,272 selected articles underwent evaluation based on predetermined criteria for article selection. This assessment was facilitated by utilizing the database's sorting function, which enabled an automated screening process. Additionally, duplicate articles were identified and removed from the selected pool to ensure the integrity of the dataset. In total, 391 articles met the criteria for inclusion, while 69,881 articles were excluded based on the criteria outlined in Table 2. This rigorous screening process ensured that only relevant and high-quality articles were included in the study, aligning with its objectives.

Table 2. Inclusion Criteria's

Items	Criteria
Type of publication	All Open-access articles
Language	English
Retrieval Articles	2019 until 2023

Eligibility

During the eligibility process, the retrieved articles that remained after the screening stage were individually reviewed to verify their alignment with the research criteria (Ali et al., 2022). This review involved scanning through the papers and assessing their titles and abstracts. Articles that did not meet the specified criteria were eliminated from consideration. The elimination process focused on identifying articles that did not address safety performance components relevant to the construction industry. Additionally, components that were not directly pertinent to the field of safety were excluded. As a result of this thorough review, 391 articles were accessed, 372 articles were deemed ineligible and removed from further consideration, leaving 19 articles that met the criteria for inclusion in the study. This meticulous process ensured that only articles directly relevant to the research objectives were retained for analysis.

Data Abstraction and Analysis

In this research study, a qualitative strategy was adopted to synthesize and analyse integrative data. The researcher thoroughly reviewed the complete texts of all 19 articles, with particular attention given to the abstracts, findings, and discussion sections. Data abstraction involved selecting relevant information from the evaluated study that could address the research questions and subsequently organizing and inputting this data into a table. In the

initial phase of thematic analysis, the aim is to identify components by examining the abstract data across all the reviewed articles, searching for patterns and similarities. By comparing the components for similarity, the comparable and abstracted data were consolidated into three main components. The three main components consist of safety participation as a leading component, safety compliance as leading component, and safety outcomes acting as a lagging component.

Conceptual Framework Development

The conceptual framework development process was structured around two main categories: independent variables and dependent variables. The independent variable, project managers' competencies, was drawn from Crawford's integrated model of competence, which emphasized three essential attributes: 1) Skills, 2) Knowledge, and 3) Attitudes. In contrast, the components of the dependent variable, safety performance components, were established based on relevant literature. This involved a thorough review of existing research to identify and define key components of safety performance in the context of green construction.

ANALYSIS OF FINDINGS

Safety Performance Components in Green Construction

Safety performance components serve as measurements used to evaluate safety in current situations or to anticipate future trends. Previous studies have noted that green construction practices may bring about distinct safety challenges and risks that require attention. These challenges arise from the diverse and complex risks associated with green activities. Several research scholars have highlighted that safety performance components are often described using varying terminologies. This discrepancy can result in confusion and inconsistency in how safety performance is assessed and evaluated. As a result, it's crucial for researchers and practitioners in the construction industry to strive for clarity and uniformity in defining and utilizing safety performance components to effectively address safety concerns in green construction projects. Usukhbayar and Choi (2020) and Makki and Alidrisi (2022) reviewed safety components in the construction industry, emphasizing safety leading as one of the components of safety performance. However, when it comes to measuring safety performance in green construction projects, the specific components and measurement methods may differ due to the unique challenges and considerations associated with green construction practices. Therefore, while safety leading may still be relevant as a safety performance component in green construction, additional or modified components tailored to the specific characteristics of green construction projects may also be necessary to comprehensively assess safety performance in this context. Onubi et al. (2022) highlighted safety lagging and safety leading as safety performance components. Lagging components in safety performance are metrics that measure the time lost and costs incurred due to injuries. They depend on the outcomes of safety performance and the number of failures recorded in implemented safety plans. Lagging components are reactive, assessing past incidents and injuries. Examples of lagging components include injury rates, lost workdays, and workers' compensation claims. These components reflect safety performance outcomes and provide insights into the effectiveness of safety programs after incidents have occurred.

Al-kasasbeh et al. (2021) highlighted several safety performance criteria that contribute to both the leading and lagging categories, based on the Occupational Safety and Health Administration (OSHA) definition. OSHA emphasizes the importance of using leading components to assess safety performance and prevent workplace accidents. Leading components are proactive metrics that help identify potential hazards and evaluate the effectiveness of safety programs before incidents occur. These components are future-oriented and include factors such as rates of training completion, reporting of near-miss incidents, level of employee engagement, and assessments of safety culture. By focusing on leading components, organizations can take proactive measures to mitigate risks and promote a safer work environment. Additionally, Yiu et al. (2019) provided a clear categorization of the key characteristics associated with projects demonstrating outstanding safety performance. One of these characteristics closely related to safety performance is high participation in safety activities and supportive safety compliance. Safety participation entails voluntary actions taken by individuals that may not directly impact their own safety but contribute to the overall safety of the organization. On the other hand, safety compliance refers to fundamental behaviours exhibited by employees to safeguard workplace safety, such as task performance and attentiveness to the production process. These characteristics highlight the importance of both proactive engagement and adherence to safety protocols in achieving superior safety performance outcomes (Abas et al., 2020). As a result, leading components can be summarized into two dimensions: safety compliance and safety participation. Through a comprehensive literature review, the components of safety performance for construction have been developed. The three interrelated components of safety performance consist of two leading components - safety participation and safety compliance - and one lagging component - the number of accidents. This table reflects the proactive measures taken to enhance safety culture and compliance, alongside the retrospective assessment of safety outcomes through accident data.

Table 3. The Three Interrelated Components of Safety Performance Components

Item	Safety Performance Components	Description	Authors
1.	Slead: Participation	Refers to the level of employee engagement and involvement in the safety process	(Abas et al., 2020; Al-kasasbeh et al., 2021; DOSH, 2024; Makki & Alidrisi, 2022; Onubi et al., 2022; Usukhbayar & Choi, 2020; Yiu et al., 2019)
2.	Slead: Compliance	Measures the degree to which safety regulations and procedures are being followed.	(Abas et al., 2020; Al-kasasbeh et al., 2021; DOSH, 2024; Onubi et al., 2022; Yiu et al., 2019)
3.	Slead: Employer's commitment	Refers to the employer's dedication to ensuring a safe work environment.	(Bush et al., 2019; DOSH, 2024; Zin & Ismail, 2012)
4.	Slead: Effectiveness of control measures at the workplace	Focuses on the efficiency of the safety measures implemented in the workplace.	(DOSH, 2024; He, 2022; Zhang & Mohandes, 2020)
5.	Slag: No. of Accidents	The <i>outcomes after the incident</i> : The time lost, injury rates, lost workdays, workers' compensation claims.	(Abas et al., 2020; Al-kasasbeh et al., 2021; Onubi et al., 2022; Yiu et al., 2019)

However, according to the Malaysian Department of Safety and Health (DOSH), safety performance components should be aligned with two additional components: employer's commitment and the effectiveness of control measures at the workplace. Employer's commitment emphasizes the importance of the employer's dedication to ensuring a safe work environment. This commitment may be demonstrated through various actions, including providing resources for safety programs, fostering a safety culture, actively supporting safety initiatives, and adhering to safe behaviour practices as stipulated in OSHA 1994 Section 17 (Duties of employers and self-employed to their employees). This component underscores the critical role that employer commitment plays in promoting and maintaining a safe workplace for employees (Bush et al., 2019; Zin & Ismail, 2012). The effectiveness of control measures at the workplace centers on the efficiency of safety measures implemented in the workplace. It emphasizes the importance of implementing scientific and reasonable measures for construction quality and safety control. By doing so, risks can be mitigated, project performance can be enhanced, and the well-being of all individuals involved can be ensured (He, 2022; Zhang & Mohandes, 2020). Thus, Table 3 presents five (5) safety performance components, formulated based on a comprehensive review of existing literature and the Department of Occupational Safety and Health (DOSH) safety guidelines.

DISCUSSIONS OF FINDINGS/ CONCEPTUAL FRAMEWORK

In this paper, a conceptual framework as shown in figure 2 is constructed to establish a causal relationship between the independent variable (Project Managers' Competencies) and the dependent variable (Safety Performance). The literature review affirms that competencies, comprising skills, knowledge, and attitudes, significantly influence performance. Furthermore, this study underscores safety performance and, as a result, formulates specific components to evaluate and assess it. The first component, participation in safety activities, relates to the steps and actions undertaken before task commencement aimed at reducing or eliminating hazards and risks. The second component, the compliance component entails adhering to safety requirements throughout task execution to guarantee a safe working environment. This encompasses adherence to relevant health and safety laws and regulations, which is crucial for managing and mitigating hazards and risks to safeguard workers from injury or harm. It involves following correct procedures for equipment usage, utilizing personal protective equipment, and adhering to safety protocols for handling and disposing of hazardous materials. The third component, employer's commitment, emphasizes employers' dedication to ensuring a safe work environment. This dedication may be demonstrated by providing sufficient resources for safety programs, cultivating a safety culture, actively backing safety initiatives, and ensuring adherence to relevant regulations and standards. Employers' commitment to safety is pivotal in establishing a workplace where the welfare of workers is paramount and safety measures are efficiently executed. The fourth component, the effectiveness of control measures at the workplace, concentrates on evaluating the efficacy of safety measures implemented within the work environment. This entails assessing how well these measures mitigate risks and hazards, improve project performance, and ensure the well-being of all individuals involved. The fifth component, the lagging component, entails analysing and evaluating safety performance following incidents. It also includes employing problem-solving skills to identify and implement corrective actions aimed at preventing similar incidents from recurring in the future. Therefore, the conceptual framework depicted in Figure 3 illustrates the interconnectedness and interdependence of various competency attributes that play a role in safety performance within the green construction industry.

CONCLUSION

In summary, safety performance in green construction presents a crucial area necessitating attention and research given its evolving nature. As the industry increasingly adopts sustainable practices and technologies, it becomes imperative to thoroughly understand and address the potential safety implications arising from these advancements. Further research endeavors can aid in enhancing our comprehension of the specific hazards and risks inherent in green construction, facilitating the formulation of effective strategies to manage and mitigate these risks. Additionally, with the growing demand for green construction, prioritizing the safety of workers and the public is paramount, ensuring that sustainability objectives are pursued without jeopardizing their well-being.

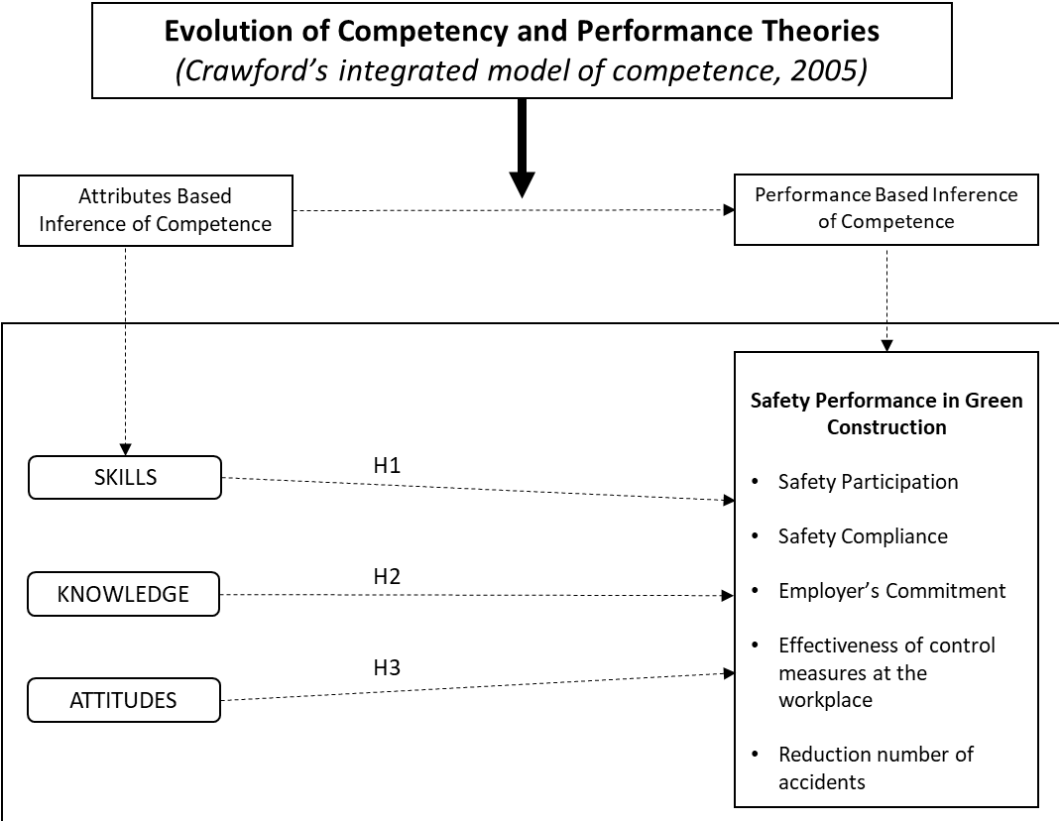


Figure 2: The Conceptual Framework of Project Managers' Competencies Toward Safety Performance based on The Crawford Integrated Model of Competence

REFERENCES

Abas, N. H., Yusuf, N., Suhaini, N. A., Kariya, N., Mohammad, H., & Hasmori, M. F. (2020). Factors Affecting Safety Performance of Construction Projects: A Literature Review. *IOP Conference Series: Materials Science and Engineering*, 713(1). <https://doi.org/10.1088/1757-899X/713/1/012036>

Abdelkhalik, H. F., & Azmy, H. H. (2022). The role of project management in the success of green building projects: Egypt as a case study. *Journal of Engineering and Applied Science*, 69(1), 1–17. <https://doi.org/10.1186/s44147-022-00112-5>

- Ahmad Latiffi, A., & Zulkiffli, N. A. (2020). The Understanding of Sustainability Knowledge among Project Manager in Managing Sustainable Construction Projects. *Scopus-International Journal of Advanced Research in Engineering and Technology (IJARET)*, 11(11), 1063–1082. <https://doi.org/10.34218/IJARET.11.11.2020.098>
- Al-kasasbeh, M., Abudayyeh, O., Olimat, H., Liu, H., Mamlook, R. Al, & Alfoul, B. A. (2021). *Framework for Workers ' Compensation Insurance : A Proposed Alternative to EMR*. 1–18.
- Ali, M. X. M., Arifin, K., Abas, A., Ahmad, M. A., Khairil, M., Cyio, M. B., Samad, M. A., Lampe, I., Mahfudz, M., & Ali, M. N. (2022). Systematic Literature Review on Indicators Use in Safety Management Practices among Utility Industries. *International Journal of Environmental Research and Public Health*, 19(10). <https://doi.org/10.3390/ijerph19106198>
- Bush, D., Chang, C., Rauscher, K., & Myers, D. (2019). Essential Elements for Effective Safety and Health Education in Postsecondary Construction Career Technical Education. *New Solutions*, 29(1), 53–75. <https://doi.org/10.1177/1048291119830657>
- CIDB. (2019). *Construction Industry Certified Construction Project Manager (Ccpm)*.
- Crawford, L. (2000). *Profiling the Competent Project Manager*. January 2009, 3–15.
- Crawford, L. (2005). Senior management perceptions of project management competence. *International Journal of Project Management*, 23(1), 7–16. <https://doi.org/10.1016/j.ijproman.2004.06.005>
- Darko, A., Chan, A. P. C., Huo, X., & Owusu-Manu, D. G. (2019). A scientometric analysis and visualization of global green building research. *Building and Environment*, 149(November 2018), 501–511. <https://doi.org/10.1016/j.buildenv.2018.12.059>
- Dewlaney, K. S., Hallowell, M. R., & Fortunato, B. R. (2012). Safety Risk Quantification for High Performance Sustainable Building Construction. *Journal of Construction Engineering and Management*, 138(8), 964–971. [https://doi.org/10.1061/\(asce\)co.1943-7862.0000504](https://doi.org/10.1061/(asce)co.1943-7862.0000504)
- DOSH. (2024). *SHO Performance Indicators*. Department of Occupational Safety and Health. <https://www.dosh.gov.my/index.php/construction-safety-v/sho-performance-indicators>
- Durdyev, S., Mohandes, S. R., Tokbolat, S., Sadeghi, H., & Zayed, T. (2022). Examining the OHS of green building construction projects: A hybrid fuzzy-based approach. *Journal of Cleaner Production*, 338, 130590. <https://doi.org/10.1016/j.jclepro.2022.130590>
- He, Y. (2022). Analysis of the impact of safety hazards in construction project management and defensive measures. *Highlights in Science, Engineering and Technology*, 10, 18–24. <https://doi.org/10.54097/hset.v10i.1208>
- Horváth, V. (2019). Project Management Competence: Definitions, Models, Standards and Practical Implications. *Budapest Management Review*, 11(0133–0179), 17.
- Hwang, B. G. (2018). Safety Performance and Improvement of Green Construction Projects. *Performance and Improvement of Green Construction Projects*, 149–164. <https://doi.org/10.1016/b978-0-12-815483-0.00010-7>
- Hwang, B. G., & Ng, W. J. (2013). Project management knowledge and skills for green construction: Overcoming challenges. *International Journal of Project Management*, 31(2), 272–284. <https://doi.org/10.1016/j.ijproman.2012.05.004>
- Hwang, B. G., Shan, M., & Phuah, S. L. (2018). Safety in green building construction projects in Singapore: Performance, critical issues, and improvement solutions. *KSCE Journal of Civil Engineering*, 22(2), 447–458. <https://doi.org/10.1007/s12205-017-1961-3>

- Jabar, I. I., Ismail, F., Aziz, N. M., & Janipha, N. A. I. (2013). Construction Manager's Competency in Managing the Construction Process of IBS Projects. *Procedia - Social and Behavioral Sciences*, 105, 85–93. <https://doi.org/10.1016/j.sbspro.2013.11.010>
- Kelemen, G. (2012). Acquiring Competences for the Didactic Profession. *Procedia - Social and Behavioral Sciences*, 46, 520–526. <https://doi.org/10.1016/j.sbspro.2012.05.153>
- Khudzari, F., Radzi, A. R., & Rahman, R. A. (2024). Emerging Technologies Adoption in the Malaysian Construction Industry: a Systematic Review. *Malaysian Construction Research Journal*, 42(1), 57–75.
- Li, Y., Li, M., Sang, P., Chen, P.-H., & Li, C. (2022). Stakeholder studies of green buildings: A literature review. *Journal of Building Engineering*, 54, 104667. <https://doi.org/10.1016/j.jobe.2022.104667>
- Li, Y., Song, H., Sang, P., Chen, P. H., & Liu, X. (2019). Review of Critical Success Factors (CSFs) for green building projects. *Building and Environment*, 158(May), 182–191. <https://doi.org/10.1016/j.buildenv.2019.05.020>
- Majid, S. A., Nugraha, A., Sulistiyono, B. B., Suryaningsih, L., Widodo, S., Kholdun, A. I., Febrian, W. D., Wahdiniawati, S. A., Marlita, D., Wiwaha, A., & Endri, E. (2022). The effect of safety risk management and airport personnel competency on aviation safety performance. *Uncertain Supply Chain Management*, 10(4), 1509–1522. <https://doi.org/10.5267/j.uscm.2022.6.004>
- Makki, A. A., & Alidrisi, H. M. (2022). Critical Systems-Thinking-Based Leadership Competencies as Enablers to Better Construction Safety Performance. *Buildings*, 12(11). <https://doi.org/10.3390/buildings12111819>
- Mohamed, S. (2002). Safety climate in the construction site environments. *Journal of Construction Engineering and Management*, 9364(November), 11. [http://ascelibrary.org/doi/abs/10.1061/\(ASCE\)0733-9364\(2002\)128:2\(117\)?journalCode=jcemd4](http://ascelibrary.org/doi/abs/10.1061/(ASCE)0733-9364(2002)128:2(117)?journalCode=jcemd4)
- Moher, D., Shamseer, L., Clarke, M., Ghersi, D., Liberati, A., Petticrew, M., Paul Shekelle, L. A. S., & Group, P.-P. (2019). Preferred reporting items for systematic review and meta-analysis protocols (prisma-p) 2015 statement. *Japanese Pharmacology and Therapeutics*, 47(8), 1177–1185.
- Moradi, S., Kähkönen, K., & Aaltonen, K. (2020). Project managers' competencies in collaborative construction projects. *Buildings*, 10(3), 1–17. <https://doi.org/10.3390/buildings10030050>
- Nadhim, E. A., Hon, C., Xia, B., Stewart, I., & Fang, D. (2018). Investigating the Relationships between Safety Climate and Safety Performance Indicators in Retrofitting Works. *Construction Economics and Building Vol.*, 18(2), 110–129.
- Nnaji, C., & Karakhan, A. A. (2020). Technologies for safety and health management in construction: Current use, implementation benefits and limitations, and adoption barriers. *Journal of Building Engineering*, 29(January), 101212. <https://doi.org/10.1016/j.jobe.2020.101212>
- Onubi, H. O., Yusof, N. A., & Hassan, A. S. (2020). Understanding the mechanism through which adoption of green construction site practices impacts economic performance. *Journal of Cleaner Production*, 254, 120170. <https://doi.org/10.1016/j.jclepro.2020.120170>
- Onubi, H. O., Yusof, N. A., & Hassan, A. S. (2022). Green construction practices: ensuring client satisfaction through health and safety performance. *Environmental Science and Pollution Research*, 29(4), 5431–5444. <https://doi.org/10.1007/s11356-021-15705-5>

- Onubi, H. O., Yusof, N. A., Hassan, A. S., & Bahdad, A. A. S. (2021). Analyzing the mediating effect of economic performance on the relationship between green construction practices and health and safety performance in Nigeria. *Environmental Science and Pollution Research*, 28(27), 36598–36610. <https://doi.org/10.1007/s11356-021-13334-6>
- Page, M. J., McKenzie, J. E., Bossuyt, P. M., Boutron, I., Hoffmann, T. C., Mulrow, C. D., Shamseer, L., Tetzlaff, J. M., Akl, E. A., Brennan, S. E., Chou, R., Glanville, J., Grimshaw, J. M., Hróbjartsson, A., Lalu, M. M., Li, T., Loder, E. W., Mayo-Wilson, E., McDonald, S., ... Moher, D. (2021). The PRISMA 2020 statement: An updated guideline for reporting systematic reviews. *The BMJ*, 372. <https://doi.org/10.1136/bmj.n71>
- Rahman, F. A., Arifin, K., Abas, A., Mahfudz, M., Cyio, M. B., Khairil, M., Ali, M. N., Lampe, I., & Samad, M. A. (2022). Sustainable Safety Management: A Safety Competencies Systematic Literature Review. *Sustainability (Switzerland)*, 14(11), 1–17. <https://doi.org/10.3390/su14116885>
- Salleh, A. (2017). The Role of Competency in Safety Performance. *Asian Journal of Business Management Studies*, 8(2), 78–83. <https://timelesstime.co.uk/knowledgebase/the-role-of-competency-in-staff-development/>
- Shaikh, A. Y., Osei-Kyei, R., & Hardie, M. (2020). A critical analysis of safety performance indicators in construction. *International Journal of Building Pathology and Adaptation*, 39(3), 547–580. <https://doi.org/10.1108/IJBPA-03-2020-0018>
- Spencer, L. M., & Spencer, S. M. (1993). *Competence at work: models for superior performance*. John Wiley & Sons, Inc.
- Stern, C., Jordan, Z., & Mcarthur, A. (2014). Developing the review question and inclusion criteria. *American Journal of Nursing*, 114(4), 53–56. <https://doi.org/10.1097/01.NAJ.0000445689.67800.86>
- Supriyatna, H., Kurniawan, W., & Purba, H. H. (2020). Occupational safety and health risk in building construction projects: A literature review. *Operational Research in Engineering Sciences: Theory and Applications*, 3(1), 28–40. <https://doi.org/10.31181/oresta200134s>
- Syed-Yahya, S. N. N., Idris, M. A., & Noblet, A. J. (2022). The relationship between safety climate and safety performance: A review. *Journal of Safety Research*, 83, 105–118. <https://doi.org/10.1016/j.jsr.2022.08.008>
- Usukhbayar, R., & Choi, J. (2020). Critical safety factors influencing on the safety performance of construction projects in Mongolia. *Journal of Asian Architecture and Building Engineering*, 19(6), 600–612. <https://doi.org/10.1080/13467581.2020.1770095>
- Wang, G., Liu, M., Cao, D., & Tan, D. (2022). Identifying high-frequency–low-severity construction safety risks: an empirical study based on official supervision reports in Shanghai. *Engineering, Construction and Architectural Management*, 29(2), 940–960. <https://doi.org/10.1108/ECAM-07-2020-0581>
- Xie, Y., Zhao, Y. Q., Chen, Y. H., & Allen, C. (2022). Green construction supply chain management: Integrating governmental intervention and public–private partnerships through ecological modernisation. *Journal of Cleaner Production*, 331(October 2021), 129986. <https://doi.org/10.1016/j.jclepro.2021.129986>
- Yiu, N. S. N., Chan, D. W. M., Sze, N. N., Shan, M., & Chan, A. P. C. (2019). Implementation of safety management system for improving construction safety performance: A Structural Equation Modelling approach. *Buildings*, 9(4). <https://doi.org/10.3390/buildings9040089>

- Zaini, M. F., Mohd Bakri, M. B., Abdul Razak, N., Ahmad Sabar, M. N., & Hasan, B. (2022). Analysis of Occupational Accidents in the Malaysian Construction Sector. *Department Of Statistics Malaysia*, 51, 1–14.
- Zhang, X., & Mohandes, S. R. (2020). Occupational Health and Safety in green building construction projects: A holistic Z-numbers-based risk management framework. *Journal of Cleaner Production*, 275, 122788. <https://doi.org/10.1016/j.jclepro.2020.122788>
- Zin, S. M., & Ismail, F. (2012). Employers' Behavioural Safety Compliance Factors toward Occupational, Safety and Health Improvement in the Construction Industry. *Procedia - Social and Behavioral Sciences*, 36(June 2011), 742–751. <https://doi.org/10.1016/j.sbspro.2012.03.081>.

ANALYSING SUCCESS FACTORS OF FACILITIES MANAGEMENT IMPLEMENTATION INTERDEPENDENCIES IN HEALTHCARE USING INTERPRETIVE STRUCTURAL MODELLING

Nur Azrin Ahmad Pakrudin, Mat Naim Abdullah @ Mohd Asmoni, Hariati Abdullah Hashim, Mohd Nadzri Jaafar, Noorizan Ahmad and Ahmad Sha'rainon Md Shaarani

Department of Real Estate, Faculty of Geoinformation and Real Estate Universiti Teknologi Malaysia, 81310 UTM Skudai Johor, Malaysia

Abstract

The implementation of Facilities Management (FM) in the healthcare sector plays a pivotal role in ensuring operational efficiency, safety, and service quality. However, limited studies have systematically examined the underlying factors that determine successful FM implementation. This research aims to identify and analyse the critical success factors (CSFs) that influence FM implementation in healthcare organisations. Using the Interpretive Structural Modelling (ISM) and MICMAC (Cross-Impact Matrix Multiplication Applied to Classification) techniques, fifteen CSFs were evaluated through expert input from thirteen experienced healthcare FM practitioners. Their driving-dependence relationships were analysed to establish a structured ISM-based hierarchy that clarifies how leadership, capability, and organisational collaboration drive effective FM implementation. The analysis revealed that Knowledge and Competencies, Top Management Commitment and Support, Teamwork Effectiveness, and Contract Management are the strongest driver factors forming the foundation for healthcare FM success. Strategic Planning and Work Environment serve as linkage factors connecting these drivers to dependent outcomes such as Risk Management, Performance Measurement, and Accreditation. The study contributes to both theory and practice by providing a validated ISM-based model that explains interdependencies among the CSFs and guides decision-makers in prioritising strategic enablers for FM improvement. It recommends strengthening leadership, competency development, and policy alignment as essential strategies for sustainable FM transformation in healthcare organisations.

Keywords: *Healthcare; Hospital; Facilities Management; Critical Success Factors; Interpretive Structural Modelling*

INTRODUCTION

The role of Facilities Management (FM) in the healthcare sector has evolved from a support function to a strategic discipline that ensures operational efficiency, safety, and service quality. Hospitals and healthcare facilities are among the most complex and high-risk environments to manage, requiring the integration of infrastructure, technology, and human resources within a framework of strict regulatory and safety standards (Olanrewaju et al., 2018; Salah et al., 2018). Effective FM is therefore essential not only for maintaining physical assets but also for enabling continuous, high-quality healthcare delivery (Amos, 2022; Chanter & Swallow, 2008).

Healthcare FM involves two interconnected domains: hard FM, which focuses on the maintenance and technical performance of buildings and systems, and soft FM, which encompasses services such as cleaning, catering, and security (Liyanage, 2008; Pitt et al., 2016). The integration of these domains is critical to ensure safe, compliant, and patient-centred environments. However, FM implementation in healthcare remains challenging due to rising operational costs, complex asset lifecycles, and diverse stakeholder expectations

(Talib, 2013; Pheng et al., 2016). These challenges are further amplified by rapid digital transformation, post-pandemic operational pressures, and sustainability demands (Abd Rahman et al., 2023; Salem & Elwakil, 2023).

Previous studies have explored FM performance indicators and maintenance efficiency (Shohet et al., 2004; Omar et al., 2016; Lai et al., 2022), yet few have examined how critical success factors (CSFs) interact to determine FM implementation success in healthcare. The absence of a structured, empirical framework limits the ability of healthcare organisations to prioritise and manage these factors systematically. Hence, there is a pressing need to develop a model that captures the interdependencies among CSFs to support decision-making and improve implementation effectiveness.

This study addresses that gap by identifying and analysing the CSFs that influence FM implementation in the healthcare sector through Interpretive Structural Modelling (ISM) and MICMAC analysis. These methods enable the visualisation of hierarchical and causal relationships among the factors, providing a deeper understanding of how they interact within a healthcare FM system.

Accordingly, the objective of this research is to identify and structure the CSFs that determine FM implementation success in healthcare organisations using the ISM–MICMAC approach. The study is guided by the following aims:

1. To identify the key success factors influencing FM implementation in healthcare organisations;
2. To examine the interdependencies among these factors through ISM and MICMAC techniques; and
3. To develop a validated, hierarchical model that prioritises these factors based on their relative influence and dependence.

The findings reveal that leadership commitment, professional competencies, and teamwork are the strongest driver factors forming the foundation for successful healthcare FM implementation. The model provides both theoretical insight and practical guidance for policymakers and practitioners to strengthen FM strategies and achieve sustainable performance outcomes.

LITERATURE REVIEW

The successful implementation of Facilities Management (FM) in healthcare requires an integrated understanding of organisational, technical, and strategic factors that collectively influence performance. A critical examination of prior literature highlights that while FM is recognised as a key enabler of operational excellence, the underlying interrelationships among its success factors remain poorly understood. Recent Malaysian evidence supports this perspective, with Hashim, Kamarazaly and Lim (2024) demonstrating that early FM integration during the design stage enhances building operability and significantly reduces downstream maintenance costs.

Facilities Management in The Healthcare Context

Healthcare facilities are among the most complex and demanding environments to operate due to their continuous service delivery requirements, diverse infrastructure, and high regulatory standards (Olanrewaju et al., 2018; Salah et al., 2018). The FM function within healthcare encompasses a wide range of services, including maintenance, safety management, and patient support, each directly affecting service quality and organisational efficiency (Amos, 2022).

FM in healthcare can be categorised into two dimensions: hard FM, which deals with building systems, infrastructure, and maintenance, and soft FM, which focuses on service delivery, cleanliness, and user comfort (Liyanage, 2008; Pitt et al., 2016). Effective FM requires both domains to operate synergistically under constrained budgets, demanding compliance, and technological transformation (Talib, 2013; Abd Rahman et al., 2023). Recent studies emphasise the growing importance of digitalisation, sustainability, and data-driven decision-making in healthcare FM (Salem & Elwakil, 2023; Adegoriola et al., 2023).

The Role of Critical Success Factors (CSFs) in Facilities Management

The concept of Critical Success Factors (CSFs), introduced by Daniel (1961) and expanded by Rockart (1979) has become a cornerstone for identifying essential organisational priorities that drive project and system success. In FM, CSFs refer to the limited number of managerial and operational conditions that must be achieved to ensure effective facility operation and long-term sustainability (Finney & Corbett, 2007; Abdullah, 2015; Hopland & Kvamsdal, 2018).

Previous research in FM has primarily focused on discrete elements such as maintenance management (Omar et al., 2016), performance indicators (Shohet et al., 2004; Lai et al., 2022), and service quality (Amos et al., 2020). However, such studies tend to treat success factors independently, without investigating their interdependencies or the hierarchical influence they exert on one another. Recent scholarship (Ali et al., 2023; Myeda et al., 2023) has called for integrated models that capture these relationships to inform evidence-based FM decision-making.

Review of Prior Research in Healthcare FM

Shohet et al. (2004) introduced a performance evaluation model for healthcare facilities using eleven key indicators, while Omar et al. (2016) examined maintenance-related CSFs in Malaysian hospitals. Lai et al. (2022) expanded on this by developing a six-aspect performance framework encompassing quality, financial management, learning and growth, internal business processes, asset maintenance, and energy efficiency. Olanrewaju et al. (2019) identified thirteen factors influencing healthcare FM performance, including managerial competency, resource allocation, and user satisfaction.

More recent studies (Adegoriola et al., 2023; Salem & Elwakil, 2023) have employed systems-based or modelling approaches to understand FM interdependencies. Yet, the healthcare context remains underexplored, especially regarding how leadership, knowledge, and organisational enablers interact to drive FM implementation outcomes. These findings

indicate a persistent fragmentation in FM literature where models address operational indicators but not the causal relationships among CSFs.

Success Factors Identified from Literature

Drawing upon extensive literature and prior empirical work (Pakrudin et al., 2017), fifteen success factors were identified as being potentially significant for healthcare FM implementation. These factors span leadership, human capital, process management, technology, and quality domains. Table 1 summarises these success factors, their conceptual definitions, and supporting literature.

Table 1. Success Factors, Concepts, and Importance in Healthcare

Item	Success Factors	Concept and Importance	Citation in Literature
1	Top management commitment and support	Top management support is crucial in FM healthcare. Up to 80% of organizations may fail without committed leadership at the top level. Clear, consistent, and realistic communication of goals and targets linked to the hospital strategy is also essential.	Alexander, 1994; Jaehn, 2000; Goyal et al., 2007; Jensen, 2011; Agarwal et al., 2016; Atkin, 2021; Singh, 2021
2	Strategic planning	Strategic planning aligns FM with core business CSFs, supports sustainable development, and meets healthcare organizations' short and long-term needs. Typical initiatives address future environmental changes and are integrated into an organization-wide plan.	Letza, 1996; Thomas, 2011; Barrett, 2009; Vest et al., 2009; Chotipanich et al., 2011; Virtue et al., 2013; Atkin, 2021; Wiggins, 2022
3	Performance measurement	Measuring FM healthcare performance involves quantifying efficiency and effectiveness, assessing organizational performance, and ensuring transparency and accountability through data collection. It is vital for success and can be improved by adopting performance-based maintenance and benchmarking practices.	Neely et al., 1995; Kollberg et al., 2011; Yuen et al., 2012; Noe et al., 2006; Amaratunga et al., 2002; McDougall et al., 2000; Yousefli, et al., 2017; Shohet, et al., 2010; Lai, 2022
4	Customer focus	Customer focus is key in healthcare FM, with a focus on quality service and satisfaction. Hospitals should prioritize staff empowerment, housekeeping, customer-friendly design, and feedback to improve patient outcomes.	Amaratunga, 2000; Kincaid, 1994; Wan et al., 1999; Loosemore, 2001; Gonzalez, 2019; Daksith, 2020
5	Knowledge and competencies	In healthcare FM, knowledge and competencies are essential for successful healthcare management. This includes FM knowledge to provide proactive contributions, managerial skills, and knowledge of both management and facilities for integrated support.	Varcoe, 1993; Alexander, 1994; Nutt, 2000; Puddy, 2001; Sapri et al., 2005; Pathirage, 2008; Wahid et al., 2009; Yasin, 2010; Jankelová et al., 2016; Adeyemi, 2019.
6	Information and communication technology (ICT)	ICT plays a crucial role in FM healthcare, helping observe energy usage and system breakdowns, manage helpdesk systems, and integrate services to support business objectives. ICT applications can improve quality, prevent errors, and prioritize patient care.	Owen et al., 1988; Scupola, 2012; Waring et al., 2002; Shohet, 2004; Nat Natarajan, 2006; Potes et al., 2013; Windlinger et al., 2014; Sulaiman, 2021; Atkin, 2021
7	Teamwork effectiveness	The effective collaboration of healthcare FM teams, prioritizing patient needs through clearly defined roles, ongoing improvement, and cooperation, aims to enhance patient care and safety while reducing workload.	Jaca, C., Viles, E., Tanco, M., Mateo, R. and Santos, J., 2013; Suwaibatul et al., 2012; Fraser et al., 2013; Chesluk, 2015; Manjula et. al., 2012; Waggie et al., 2021; Myeda et al., 2023

Item	Success Factors	Concept and Importance	Citation in Literature
8	Contract management	Healthcare FM contract management coordinate in-house and outsource services, use SLA's, and documentations for agreed standards and procedure, including service outcomes, cost reduction, and measurement.	Payne and Rees, 1999; Wan Yeung Kam-Shim, 1999; Roberts, 2001; Kadehors, 2008; Nazali Mohd Noor, M. and Pitt, M., 2009; Brochner et. al, 2019; Atkin, 2021
9	Strategic decision making	Strategic decision making in FM involves processing complex information for timely and quality service delivery, with clear role definition and sound professional judgement. It includes major decisions like capital investment, service line expansion and facility upgrades.	Shohet et al., 2004; Barret, 2000; Kamaruzzaman, 2010; Irizarry, 2014; Jaca, 2013; Okoroh, 2006; Fraser, 2014; Wiggins, 2020; Lai et. al, 2022
10	Resource and training	FM professionals need expertise in project management and technology. Training is required to keep up with changes in the field, improve operations, and prioritize public health, quality of care, and cost saving.	Mahadkar et al., 2012; Kell, 1991; Ramadevi et al., 2016; Fraser et al., 2013; Kell, 1991; Atkin 2021
11	Continuous improvement	Continuous enhancement involves continually improving processes and results through assessment and approaches like total quality management and strategic management. It is crucial for FM's success and contributes to the healthcare business.	Amaratunga et al., 2002; Gowen III et al., 2012; Buttigieg et al., 2016; Lai et. al, 2022; Amos, 2022
12	Equipment and facility upgrading	Effective equipment and facility management is vital in healthcare for optimized operations. Strategic planning, maintenance, and monitoring are important for managing facilities and equipment. Life cycle cost is crucial for maintenance and upgrading. Upgrading facilities and equipment improves competitiveness, satisfaction, and market share.	Loosemore et al., 2001; Shohet et. al, 2004; Kihui et. al, 2012; Sulaiman et.al, 2020; Atkin 2021; Zamzam, 2021; Abd Rahman et. al, 2023, Salem et. al, 2023
13	Risk management	Risk management is vital in healthcare FM to identify, analyse, control, and finance risks. Physical and technology hazards must be mitigated for high performing building systems and patient safety. It is a critical success factors for best – value service delivery.	Okoroh et. al, 2002; Okoroh et. al 2006; Brinia et al., 2013; Delcea et al., 2016; Lai et.al 2022
14	Work environment	Work environment in FM healthcare encompass physical, social, and psychological factors. It affects safety, productivity, and well – being FM must ensure comfort, safety, and free of harassment and health hazards.	Gallagher, 1998; Duffy, 2000; Douglas, 1996; Amaratunga et al., 2002; Atkin 2021; Schultz, 2022
15	Accreditation	Accreditation improves healthcare quality and safety by recognizing organization meet predetermined standards. Its preferred method to promote better performance, recognize areas for improvement and monitor larger health organization.	Braithwaite et al., 2010; Greenfield et al., 2008, Shaw et al., 2010; Duckett, 1983, Saleh et al., 2013, Cleveland et al., 2011; Pitt et al., 2016; Pasinringi, 2021 Nazareth et al., 2023

Research Gap and Conceptual Linkage

The review of prior studies indicates that FM success in healthcare depends on multiple interrelated factors. However, existing research has generally examined these CSFs in isolation, offering limited understanding of how they influence each other hierarchically. The lack of a structured, empirically validated model prevents practitioners and policymakers from identifying which factors should be prioritised during FM implementation.

This study therefore addresses the following key gap:

“There is insufficient empirical evidence explaining the structural interdependencies and causal relationships among CSFs in healthcare FM implementation.”

To bridge this gap, this research employs the Interpretive Structural Modelling (ISM) and MICMAC techniques to establish a hierarchical model that systematically maps these interrelationships. This approach aligns directly with the study’s objective to develop a structured understanding of how CSFs collectively determine FM implementation success in healthcare environments.

RESEARCH METHODOLOGY

This study adopts an Interpretive Structural Modelling (ISM) approach to examine the interrelationships among fifteen Critical Success Factors (CSFs) influencing Facilities Management (FM) implementation in the healthcare sector. The ISM technique was complemented with a MICMAC analysis to classify the CSFs according to their relative driving and dependence power. This methodological combination provides both structural depth (through ISM) and categorical insight (through MICMAC), allowing for a comprehensive understanding of how various CSFs interact to support successful FM implementation. This emphasis on professional expertise and competency is consistent with the findings of Au-Yong, Ali and Ahmad (2017), who emphasised that the competence and commitment of facilities managers are pivotal to achieving maintenance performance and successful FM implementation in Malaysia.

Overview of The ISM Approach

The ISM technique is a well-established methodological framework for identifying and structuring complex relationships among elements within a system (Mandal & Deshmukh, 1994; Singh et al., 2007). In this study, the ISM method was selected for its ability to convert expert-based qualitative judgments into a hierarchical model that represents the contextual interdependencies among CSFs. The method allows FM experts to systematically determine which factors drive others and which are more dependent within the healthcare FM context.

Following the recommendations of Sage (1977) and prior FM-related ISM applications (Talib et al., 2011; Adegoriola et al., 2023), this research applied six sequential steps to develop the structural model:

1. Identify the element set (list of CSFs).
2. Define contextual relationships among the factors.
3. Develop the Structural Self-Interaction Matrix (SSIM).
4. Construct the Reachability Matrix.
5. Conduct Level Partitioning.
6. Build the ISM-based model and validate through MICMAC analysis.

The ISM technique was complemented with the MICMAC analysis to categorise the CSFs according to their relative driving and dependence power. This dual approach is particularly suitable for FM studies involving interdependent managerial and technical variables, as it converts expert knowledge into a structured model that reveals causal linkages.

Step 1: Development of The Structural Self-Interaction Matrix (SSIM)

Table 2. The Blank SSIM for The FM Implementation in The Healthcare Industry

Success Factors		(i)														
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
1	Teamwork Effectiveness															
2	Contract Management															
3	Knowledge and Competencies															
4	Strategic Decision Making															
5	Resource and Training															
6	Top Management Commitment and Support															
7	Equipment And Facility Upgrading															
(i) 8	Strategic Planning															
9	Information and Communication ICT															
10	Risk Management															
11	Customer Focus															
12	Work Environment															
13	Performance Measurement															
14	Continuous Improvement															
15	Accreditation															

Table 3. Experts' Profile

No.	Expert	Position	Certification	Years Working in Healthcare Industry
1	A	Facility Engineer	Degree in Electrical	10
2	B	Healthcare Engineer	Degree in Mechanical	6
3	C	Healthcare Engineer	Degree in Mechanical	13
4	D	Healthcare Engineer	Degree in Electrical and Electronic	10
5	E	Healthcare Engineer	Degree in Electrical	12
6	F	Facility Manager	Degree in Electrical	9
7	G	Facility Manager	Degree in Electrical	6
8	H	Healthcare Engineer	Degree in Electrical and Electronic	7
9	I	Senior General Manager	Degree in Civil	22
10	J	Facility Manager	Degree in Electrical and Electronic	15
11	K	Facility Manager	Certified Healthcare Facility Manager	10
12	L	Facility Manager	Degree in Mechanical	15
13	M	Facility Manager	Certified Healthcare Facility Manager	13

The first stage involved constructing a Structural Self-Interaction Matrix (SSIM) that captures the pairwise relationships among the fifteen identified critical success factors (CSFs). Thirteen subject-matter experts in healthcare FM participated in this evaluation process. The experts were selected based on a minimum of ten years of professional experience in healthcare FM, representing both public and private healthcare institutions, to ensure diverse and credible insights. Each expert was asked to determine the directional relationship between pairs of factors using four symbols (V, A, X, O) as described by Mandal et al. (1994):

- **V** – factor *i* leads to factor *j*
- **A** – factor *j* leads to factor *i*
- **X** – factors *i* and *j* influence each other
- **O** – factors *i* and *j* are unrelated

The general structure of the SSIM is illustrated in Table 2, and the expert profiles contributing to the analysis are summarised in Table 3.

The final, aggregated SSIM derived from expert consensus is presented in Table 4. Transitivity rules were applied to ensure logical consistency, where if $A > B$ and $B > C$, then $A > C$ (Miles et al., 1994).

Table 4. Final SSIM of CSFs for Successful Implementation of FM in Healthcare Industry

Success Factors		(i)														
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
1	Teamwork Effectiveness	V	V	X	V	V	A	V	V	V	V	V	X	V	X	V
2	Contract Management	A	V	A	A	V	V	X	V	V	V	V	V	V	V	X
3	Knowledge and Competencies	X	V	V	V	X	V	V	V	V	V	V	V	V	V	V
4	Strategic Decision Making	A	V	A	V	V	A	V	X	V	V	A	V	V	V	X
5	Resource and Training	A	V	X	A	V	A	V	A	V	V	A	V	V	V	V
6	Top Management Commitment and Support	V	A	A	V	V	V	V	V	V	V	V	V	V	V	V
7	Equipment And Facility Upgrading	A	A	A	A	A	A	V	A	V	V	A	V	V	V	V
(i) 8	Strategic Planning	A	X	A	X	V	A	V	V	V	V	A	A	V	V	X
9	Information and Communication ICT	A	A	A	A	A	A	A	A	V	V	A	A	A	V	V
10	Risk Management	A	A	A	A	A	A	A	A	V	V	A	A	V	V	V
11	Customer Focus	A	A	A	V	V	A	V	V	V	V	V	V	V	V	A
12	Work Environment	X	A	A	A	A	A	A	V	V	V	A	V	V	V	V
13	Performance Measurement	A	A	A	A	A	A	A	V	A	A	A	V	A	V	V
14	Continuous Improvement	X	A	A	A	A	A	A	A	A	A	A	V	V	V	V
15	Accreditation	A	A	A	X	A	A	A	X	A	A	V	A	A	A	V

Step 2: Develop The Reachability Matrix

Table 5. Final Reachability Matrix of CSFs for Successful Implementation of FM in Healthcare Industry

Success Factors		(i)															Driving Power
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	
1	Teamwork Effectiveness	1	1	1	1	0	0	1	1	1	1	1	1	1	1	1	13
2	Contract Management	0	1	0	0	0	1	0	1	1	1	1	1	1	1	1	10
3	Knowledge and Competencies	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	15
4	Strategic Decision Making	0	1	0	1	0	0	1	1	1	1	0	1	1	0	1	9
5	Resource and Training	0	1	1	0	1	0	1	0	1	1	0	1	1	1	1	10
6	Top Management Commitment and Support	1	0	0	1	1	1	1	1	1	1	1	1	1	1	1	13
7	Equipment And Facility Upgrading	0	0	0	0	0	0	1	0	1	0	0	1	1	1	1	6
(i) 8	Strategic Planning	0	1	0	1	0	0	1	1	1	1	0	0	1	1	1	9
9	Information and Communication ICT	0	0	0	0	0	0	0	0	1	1	0	0	0	1	1	4
10	Risk Management	0	0	0	0	0	0	1	0	0	1	0	0	1	1	1	5
11	Customer Focus	0	0	0	1	1	0	1	1	1	1	1	1	1	1	0	10
12	Work Environment	1	0	0	0	0	0	0	1	1	1	0	1	1	1	1	8
13	Performance Measurement	0	0	0	0	0	0	0	0	1	0	0	0	1	0	1	3
14	Continuous Improvement	1	0	0	0	0	0	0	0	0	0	0	0	1	1	1	4
15	Accreditation	0	1	0	1	0	0	0	1	0	0	1	0	0	0	1	5
Dependence		5	7	3	7	4	3	9	9	12	11	6	9	13	12	14	

The SSIM was converted into a binary reachability matrix by replacing the symbols (V, A, X, O) with binary values (1 and 0) based on the following rules:

- If the SSIM entry is **V**, the (i, j) position is assigned 1, and (j, i) is assigned 0.
- If **A**, the (i, j) position is 0, and (j, i) is 1.
- If **X**, both (i, j) and (j, i) are 1.
- If **O**, both (i, j) and (j, i) are 0.

The resulting matrix captures the reachability (driving power) and dependence (influence received) for each Assuming each row yields the total driving power, while summing each column provides the total dependence value. The final reachability matrix for the fifteen CSFs is shown in Table 5.

Step 3: Level Partitioning

Once the reachability matrix was established, Level Partitioning was carried out to identify the hierarchical structure of the CSFs. For each factor, a reachability set (factors it can influence) and an antecedent set (factors that influence it) were defined. The intersection of these sets determined the position of the factor in the hierarchy.

Factors with identical reachability and intersection sets were assigned to the highest level in each iteration, signifying their dependence on other factors. These top-level elements were then removed, and the process was repeated iteratively until all factors were classified.

The six iterations and resulting hierarchical levels are presented in Tables 6 to 11. Each iteration refined the relationships and clarified which factors acted as drivers, linkages, or dependents within the system.

Table 6. Iteration 1

Factors	Reachability Set	Antecedent Set	Intersection Set	Level
1	1,2,3,4,7,8,9,10,11,12,13,14,15	1,3,6,12,14	1,3,12,14	
2	2,6,7,8,9,10,11,12,13,14,15	1,2,3,4,5,8	2,8	
3	1,2,3,4,5,6,7,8,9,10,11,12,13,14,15	1,3,5	1,3,5	
4	2,4,7,8,9,10,12,13,15	1,3,4,6,8,11,15	4,8,15	
5	2,3,7,9,10,12,13,14,15	3	3	
6	1,4,6,7,8,9,10,11,12,13,14,15	2,3,6	6	
7	7,9,10,12,13,14,15	1,2,3,4,5,6,7,8,11	7	
8	2,4,7,8,9,10,13,14,15	1,2,3,4,6,8,11,12,15	2,4,8,15	
9	9,10,14,15	1,2,3,4,5,6,7,8,9,11,12,13	9	
10	10,13,14,15	1,2,3,4,5,6,7,8,9,10,11,12	10	
11	4,7,8,9,10,11,12,13,14	1,2,3,6,11,15	11	
12	1,8,9,10,12,13,14,15	1,2,3,4,5,6,7,11,12	1,12	
13	9,13,15	1,2,3,4,5,6,7,8,10,11,12,13,14	13	
14	1,13,14,15	1,2,3,5,6,7,8,9,10,11,12,14	1,14	
15	4,8,11,15	1,2,3,4,5,6,7,8,9,10,12,13,14,15	4,8,15	I

Table 6 (Iteration 1): SF15 (Accreditation) emerged as the top-level factor with the highest dependence, indicating that successful accreditation relies on the achievement of other enabling factors.

Table 7. Iteration 2

Factors	Reachability Set	Antecedent Set	Intersection Set	Level
1	1,2,3,4,7,8,9,10,11,12,13,14	1,3,6,12,14	1,3,12,14	
2	2,6,7,8,9,10,11,12,13,14	1,2,3,4,5,8	2,8	
3	1,2,3,4,5,6,7,8,9,10,11,12,13,14	1,3,5	1,3,5	
4	2,4,7,8,9,10,12,13	1,3,4,6,8,11	4,8	
5	2,3,7,9,10,12,13,14	3	3	
6	1,4,6,7,8,9,10,11,12,13,14	2,3,6	6	
7	7,9,10,12,13,14	1,2,3,4,5,6,7,8,11	7	
8	2,4,7,8,9,10,13,14	1,2,3,4,6,8,11,12	2,4,8	
9	9,10,14	1,2,3,4,5,6,7,8,9,11,12,13	9	II
10	10,13,14	1,2,3,4,5,6,7,8,9,10,11,12	10	II
11	4,7,8,9,10,11,12,13,14	1,2,3,6,11	11	
12	1,8,9,10,12,13,14	1,2,3,4,5,6,7,11,12	1,12	
13	9,13	1,2,3,4,5,6,7,8,10,11,12,13,14	13	II
14	1,13,14	1,2,3,5,6,7,8,9,10,11,12,14	1,14	II

Table 7 (Iteration 2): SF9 (Information & Communication Technology), SF10 (Risk Management), SF13 (Performance Measurement), and SF14 (Continuous Improvement) occupy Level 2, reflecting moderate driving power and high dependence.

Table 8. Iteration 3

Factors	Reachability Set	Antecedent Set	Intersection Set	Level
1	1,2,3,4,7,8,11,12	1,3,6,12	1,3,12	
2	2,6,7,8,11,12	1,2,3,4,5,8	2,8	
3	1,2,3,4,5,6,7,8,11,12	1,3,5	1,3,5	
4	2,4,7,8,12	1,3,4,6,8,11	4,8	
5	2,3,7,12	3	3	
6	1,4,6,7,8,11,12	2,3,6	6	
7	7,12	1,2,3,4,5,6,7,8,11	7	III
8	2,4,7,8	1,2,3,4,6,8,11,12	2,4,8	III
11	4,7,8,11,12	1,2,3,6,11	11	
12	1,8,12	1,2,3,4,5,6,7,11,12	1,12	III

Table 8 (Iteration 3): SF7 (Equipment & Facility Upgrading), SF8 (Strategic Planning), and SF12 (Work Environment) form Level 3 as essential linkages connecting drivers and dependent variables.

Table 9. Iteration 4

Factors	Reachability Set	Antecedent Set	Intersection Set	Level
1	1,2,3,4,11	1,3,6	1,3	
2	2,6,11	1,2,3,4,5	2	
3	1,2,3,4,5,6,11	1,3,5	1,3,5	
4	2,4	1,3,4,6,11	4	IV
5	2,3	3	3	IV
6	1,4,6,11	2,3,6	6	
11	4,11	1,2,3,6,11	11	IV

Table 9 (Iteration 4): SF4 (Strategic Decision-Making), SF5 (Resources and Training), and SF11 (Customer Focus) were classified into Level 4, demonstrating a balance between influence and dependency.

Table 10. Iteration 5

Factors	Reachability Set	Antecedent Set	Intersection Set	Level
1	1,2,3	1,3,6	1,3	V
2	2,6	1,2,3	2	V
3	1,2,3,6	1,3	1,3	
6	1,4,6	2,3,6	6	

Table 10 (Iteration 5): SF1 (Teamwork Effectiveness) and SF2 (Contract Management) were identified as Level 5 factors, functioning as key drivers in FM implementation.

Table 11. Iteration 6

Factors	Reachability Set	Antecedent Set	Intersection Set	Level
3	1,2,3,6	1,3	1,3	VI
6	1,4,6	2,3,6	6	VI

Table 11 (Iteration 6): SF3 (Knowledge & Competencies) and SF6 (Top Management Commitment and Support) form Level 6, representing the strongest drivers at the foundation of the model.

Following six rounds of level partitioning, the hierarchical structure of the CSFs was established. This structure served as the basis for developing the final ISM-based model.

Step 4: Result of MICMAC Analysis

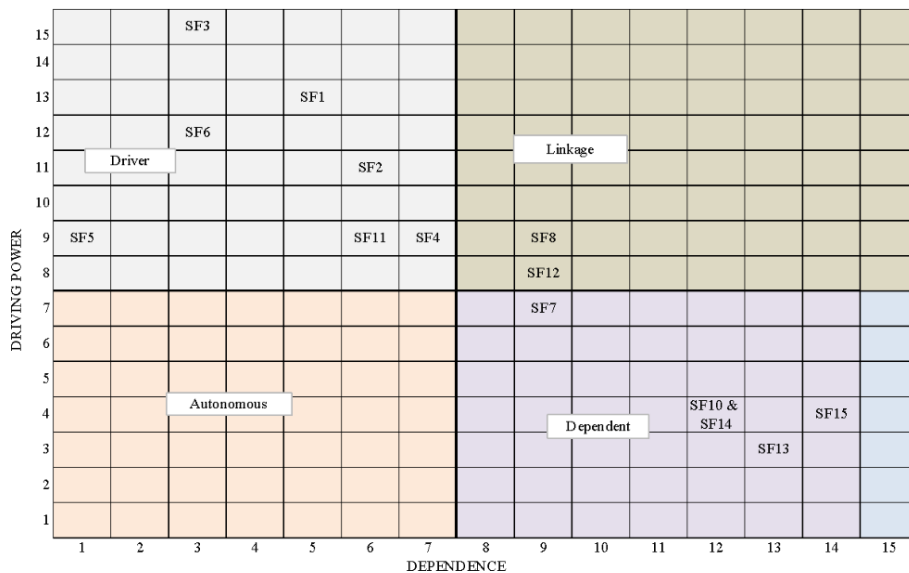


Figure 1. Classification of CSFs Based on Driving and Dependence Power (MICMAC Analysis)

The following section presents the results derived from the ISM and MICMAC analyses, highlighting the hierarchical structure and interdependencies among the 15 critical success factors. To validate and categorise the ISM results, a MICMAC (Cross-Impact Matrix Multiplication Applied to Classification) analysis was conducted. MICMAC analysis classifies factors based on their driving power and dependence power, resulting in four quadrants:

1. Driver factors – high driving power, low dependence
2. Linkage factors – high driving and high dependence
3. Dependent factors – low driving power, high dependence
4. Autonomous factors – low driving and low dependence

The outcome of this analysis is illustrated in Figure 1, which shows how the critical success factors (CSFs) are classified according to their driving and dependence power in the healthcare FM system.

Step 5: Result of ISM-Based Model

Using the outcomes of level partitioning and MICMAC categorisation, an integrated ISM-based model was constructed to represent the hierarchical relationships among the CSFs. Based on the outcomes of the previous step, the hierarchical relationships among the CSFs were developed using Interpretive Structural Modelling (ISM). The resulting framework is shown in Figure 2, which presents the cascading influence of driver, linkage, and dependent factors in the healthcare FM implementation model.

This structured model enables a clear understanding of the cascading influence from leadership and capability-based drivers (such as Top Management Commitment and Knowledge & Competencies) through strategic and operational linkages, to final dependent outcomes like Continuous Improvement and Accreditation.

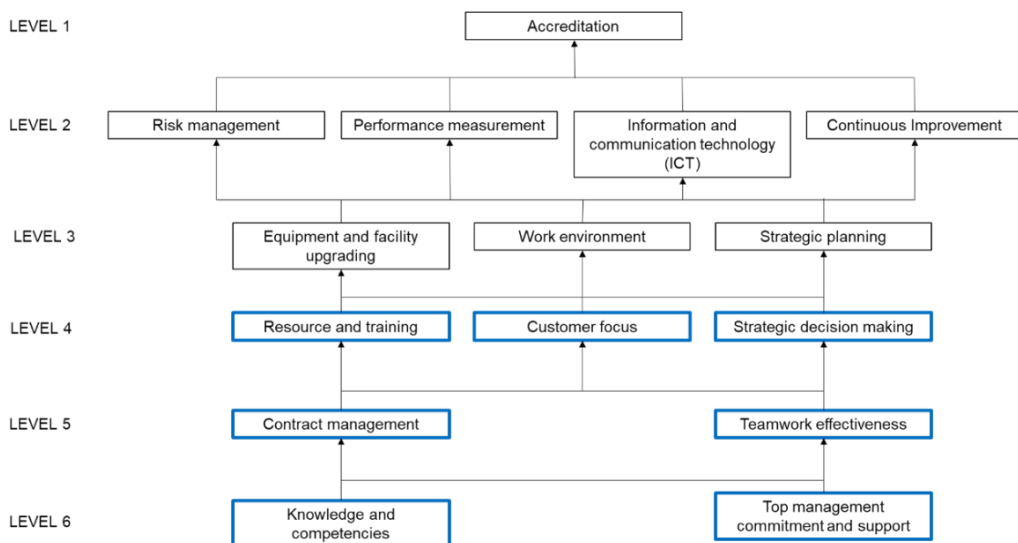


Figure 2. ISM-Based Hierarchical Model Illustrating The Cascading Relationships Among Critical Success Factors in Healthcare FM Implementation

Step 6: Model Validation and Interpretation

The ISM model was reviewed and validated by the same group of experts to ensure interpretive accuracy and contextual relevance. The experts confirmed that the hierarchical structure aligns with real-world FM implementation dynamics in healthcare organisations. The validated ISM–MICMAC framework thus provides a reliable analytical foundation for both academic interpretation and practical application in FM performance enhancement.

This research followed a systematic six-step ISM process integrated with MICMAC validation to derive a hierarchical and interdependent model of success factors. The methodology not only identifies *which* factors are critical but also explains *how* they interact, thereby contributing to a more structured understanding of FM implementation success in healthcare environments.

The preceding methodological process established a structured framework for analysing the interrelationships among the fifteen identified success factors for Facilities Management (FM) implementation in healthcare. Through the Interpretive Structural Modelling (ISM) approach, qualitative expert inputs were systematically transformed into a hierarchical model, enabling a visual and analytical understanding of causal linkages among the factors.

The resulting reachability matrix and level partitioning exercises (Tables 5–11) provided a foundation for classifying each success factor according to its level of influence and dependency. To further validate and interpret these hierarchical relationships, the MICMAC (Cross-Impact Matrix Multiplication Applied to Classification) analysis was applied, categorising the factors into four groups: driver, linkage, dependent, and autonomous. This dual analytical approach ISM for structural mapping and MICMAC for classification ensures that the findings are both methodologically robust and strategically meaningful. The following section presents the results derived from this integrated analysis, highlighting how key driver factors such as Top Management Commitment, Knowledge and Competencies, Teamwork, and Contract Management shape the broader system of FM implementation in healthcare.

FINDINGS AND DISCUSSION

The findings from both MICMAC and ISM analyses indicate a coherent structure among the success factors of FM implementation in the healthcare sector.

The driver factors (e.g., knowledge and competencies, teamwork, contract management, and top management support) serve as the key enablers that propel successful implementation.

1. The linkage factors (strategic planning and work environment) operate as connecting bridges between the strong drivers and the dependent outcomes, reinforcing the dynamic nature of healthcare FM systems.
2. The dependent factors (risk management, continuous improvement, and accreditation) emerge as outcomes resulting from the effective integration of the preceding layers.

The correspondence between the literature review (Table 1) and the MICMAC and ISM results is significant, demonstrating the theoretical coherence and empirical consistency of the findings.

Top management commitment, strategic planning, teamwork, and customer focus were consistently recognised as essential for FM success, validating previous findings by Shohet et al. (2004), Olanrewaju et al. (2019), and Amos (2022). These results are further supported by more recent studies such as Adegioriola et al. (2023) and Ali et al. (2023), who found that leadership capability, management support, and team competency play pivotal roles in driving

FM performance across healthcare facilities. Similarly, Salem and Elwakil (2023) emphasised that top management commitment and staff knowledge are critical to sustaining FM innovation and digital transformation in the healthcare environment.

However, the ISM analysis offers a deeper structural understanding showing not just which factors are important, but how they influence one another within a hierarchical framework. As illustrated in Figure 1, Strategic Planning (SF8) and Work Environment (SF12) occupy the linkage quadrant, connecting driver factors such as Top Management Commitment (SF6) and Knowledge & Competencies (SF3) to dependent results like Accreditation (SF15) and Continuous Improvement (SF14). This interconnected structure demonstrates that effective FM implementation in healthcare is not linear but relational where leadership, capability, and teamwork collectively drive performance and outcomes.

The ISM-based model provides healthcare facility managers with a clear roadmap for prioritising strategic actions. Strengthening top management commitment and staff competencies forms the foundation for building cohesive teamwork and effective contract management. These, in turn, support strategic decision-making and resource planning, ultimately enhancing risk control, continuous improvement, and accreditation outcomes. Thus, the model can be applied as both a diagnostic tool and a strategic planning framework to guide FM implementation in hospitals and similar institutions.

Beyond theoretical interpretation, these findings have important implications for healthcare FM practice.

In practice, healthcare facility administrators can use the ISM-based model as a strategic decision-support tool to prioritise leadership commitment, competency development, and interdepartmental collaboration. The hierarchical structure enables managers to align training programs, contract management standards, and performance evaluation frameworks with the key driver factors identified in this study. By focusing on these foundational enablers, organisations can enhance decision-making, strengthen FM policy alignment, and achieve sustainable operational performance. Moreover, policymakers may utilise the model to develop competency frameworks and national guidelines that reinforce leadership accountability, standardise contract governance, and promote continuous FM improvement across healthcare institutions. These findings align with Jenuwa et al. (2024), who proposed a model for assessing facility manager competencies within Malaysian hospital projects, highlighting that professional capability and strategic decision-making are fundamental drivers of successful FM implementation.

CONCLUSION, LIMITATIONS AND FUTURE RESEARCH AGENDA

This study examined the critical success factors (CSFs) influencing the implementation of Facilities Management (FM) in the healthcare sector using the Interpretive Structural Modelling (ISM) and MICMAC analytical approaches. Fifteen CSFs were identified and analysed to determine their hierarchical relationships and interdependencies. The ISM–MICMAC framework revealed that driver factors such as Top Management Commitment, Knowledge and Competencies, Teamwork, and Contract Management exert the greatest influence on FM implementation outcomes. Linkage factors such as Strategic Planning and Work Environment serve as mediators connecting leadership and operational domains, while

dependent factors including Risk Management, Continuous Improvement, and Accreditation emerge as the resulting performance outcomes.

The research contributes to both theory and practice by presenting an empirically validated structural model that clarifies the interrelationships among the key CSFs in healthcare FM. The model offers a system-based perspective, moving beyond isolated factor analysis to explain how managerial, organisational, and operational elements interact to shape FM performance. This structured understanding fills a significant gap in FM literature, where previous studies often focused on individual success determinants without exploring their hierarchical influence.

From a practical standpoint, the ISM-based model provides healthcare facility administrators and policymakers with a strategic planning and diagnostic tool for prioritising FM improvement initiatives. Organisations are encouraged to strengthen leadership commitment, invest in competency development, and foster teamwork across departments to ensure effective policy implementation and operational alignment. By using this model, managers can link strategic planning with performance evaluation systems, thereby improving decision-making and ensuring sustainable FM outcomes in healthcare environments.

This research also highlights opportunities for future studies. Subsequent work could expand the ISM–MICMAC framework to encompass other healthcare facility contexts, such as primary care clinics or long-term care centres, to assess the model’s generalisability. Furthermore, integrating this framework with quantitative approaches such as Structural Equation Modelling (SEM) or the Rasch Measurement Model may provide statistical validation and deeper insight into the strength of causal relationships. Future studies could also explore the influence of digitalisation, artificial intelligence, and post-pandemic FM practices, extending this model towards a more data-driven and adaptive Facilities Management framework.

In conclusion, the study establishes a structured and evidence-based framework that not only enhances understanding of how success factors interact within healthcare FM but also provides a practical foundation for strategic decision-making, leadership development, and performance optimisation. By applying the proposed ISM–MICMAC model, healthcare organisations can move towards more sustainable, resilient, and intelligent FM systems that support both operational excellence and long-term institutional value. This study extends the insights of previous Malaysian research (Au-Yong et al., 2017; Hashim et al., 2024; Jenuwa et al., 2024), by presenting a structured ISM–MICMAC framework that aligns with national FM practice trends and informs policy-level strategies for strengthening healthcare facility management in Malaysia.

REFERENCES

- Abd Rahman, N.H., Ibrahim, A.K., Hasikin, K. and Abd Razak, N.A. (2023) ‘Critical device reliability assessment in healthcare services’, *Journal of Healthcare Engineering*, 2023.
- Abdallah, A. (2014) ‘Implementing quality initiatives in healthcare organizations: Drivers and challenges’, *International Journal of Health Care Quality Assurance*, 27(3), pp.166–181.

- Abdullah, M.N.A. (2012) *A structured critical success factors model for implementing project quality management system in construction*. Skudai: Universiti Teknologi Malaysia.
- Abdullah, M.N., Asmoni, M., Mohammed, A.H., Mei, J.L.Y. and Ting, L.S. (2015) 'Critical success factors of project quality management system for Malaysian construction industry', *Jurnal Teknologi*, 74(2), pp.123–131.
- Adegoriola, M.I., Lai, J.H. and Abidoye, R. (2023) 'Critical success factors of heritage building maintenance management: An ISM–MICMAC analysis', *Journal of Building Engineering*, 106941.
- Adeyemi, I.A., Martin, D., Eni, S. and Adeyemi, A. (2019) 'Ascertaining the transfer of facility management knowledge to the development of new students' residential colleges in UTHM Malaysia', *Journal of Technology Management and Business*, 6(1).
- Agarwal, R., Green, R., Agarwal, N. and Randhawa, K. (2016) 'Management practices in Australian healthcare: Can NSW public hospitals do better?', *Journal of Health Organization and Management*, 30(3), pp.331–353.
- Alexander, K. (1994) 'A strategy for facilities management', *Facilities*, 12(11), pp.6–10.
- Ali, A.H., Elyamany, A., Ibrahim, A.H., Kineber, A.F. and Daoud, A.O. (2023) 'Modelling the relationship between modular construction adoption and critical success factors for residential projects in developing countries', *International Journal of Construction Management*, pp.1–12.
- Amaratunga, D., Baldry, D. and Sarshar, M. (2000) 'Assessment of facilities management performance—what next?', *Facilities*, 18(1/2), pp.66–75.
- Amaratunga, R.D.G. and Baldry, D. (2002) 'Performance measurement in facilities management organisations: Transition from measurement to management', *Facilities*, 8(4), pp.318–337.
- Amos, D. (2022) 'A practical framework for performance measurement of facilities management services in developing countries' public hospitals', *Journal of Facilities Management*, 20(5), pp.713–731.
- Amos, D., Au-Yong, C.P. and Musa, Z.N. (2020) 'Developing key performance indicators for hospital facilities management services: A developing country perspective', *Engineering, Construction and Architectural Management*, 27(9), pp.2715–2735.
- Amos, D., Musa, Z.N. and Au-Yong, C.P. (2019) 'A review of facilities management performance measurement', *Property Management*, 37(4), pp.490–511.
- Atkin, B. and Brooks, A. (2021) *Total facility management*. 5th ed. Oxford: Wiley- Blackwell.
- Au-Yong, C.P., Ali, A.S. and Ahmad, F. (2017) 'Competency and commitment of facilities managers: Keys to safeguard maintenance performance', *Malaysian Construction Research Journal*, 22(2)
- Barrett, P. and Baldry, D. (2009) *Facilities management: Towards best practice*. 3rd ed. Oxford: Wiley.
- Gallagher, M. (1998) *The healthy building: How design influences wellbeing and productivity*. Watford: Building Research Establishment.
- Greenfield, D., Braithwaite, J., Pawsey, M. and Westbrook, M. (2008) 'Health service accreditation as a predictor of clinical and organizational performance: A meta- analytic study', *BMJ Quality & Safety*, 17(6), pp.511–520.
- Hashim, N., Kamarazaly, M.A. and Lim, Y.X. (2024) 'Integration of facilities management (FM) during design stage for office building in Malaysian construction industry', *Malaysian Construction Research Journal*, Special Issue, 21(1).

- Jenuwa, N., Wan Norizan, N., Yusop, N., Mat Isa, S.S. and Misnan, M.S. (2024) 'A model for assessing the competency of facility managers in pre-construction hospitals in Malaysia', *Malaysian Construction Research Journal*, Special Issue, 22(2).
- Lai, J.H.K., Wong, J.M.W. and Siu, F.M.F. (2022) 'Resilient facilities management strategies in healthcare buildings', *Facilities*, 40(5/6), pp.291–309.
- Liyanage, C. and Egbu, C. (2008) 'A performance management framework for healthcare facilities management', *Journal of Facilities Management*, 6(1), pp.23–36.
- Loosemore, M. and Hsin, Y.Y. (2001) 'Customer-focused benchmarking for facilities management', *Facilities*, 19(13/14), pp.464–476.
- Mahadkar, S., Mills, G. and Price, A.D. (2012) 'Stakeholder consultation practices within healthcare infrastructure planning: A conceptual approach to strategic asset management', *Built Environment Project and Asset Management*, 2(2), pp.127–145.
- Mandal, A. and Deshmukh, S.G. (1994) 'Vendor selection using interpretive structural modelling (ISM)', *International Journal of Operations & Production Management*, 14(6), pp.52–59.
- Manjula, C. and Senaratne, S. (2012) 'Teamwork in facilities management', *Proceedings of the World Construction Symposium 2012*, pp.258–265.
- McDougall, G. and Hinks, J. (2000) 'Identifying priority issues in facilities management benchmarking', *Facilities*, 18(10/11/12), pp.427–434.
- Miles, M.B. and Huberman, A.M. (1994) *Qualitative data analysis*. 2nd ed. Thousand Oaks: Sage.
- Mohamadi, S., Abbasi, A., Ranaei Kordshouli, H.A. and Askarifar, K. (2022) 'Conceptualizing sustainable–responsible tourism indicators: An interpretive structural modeling approach', *Environment, Development and Sustainability*, 24(1), pp.399–425.
- Moy, F. Jr. (1995) 'Facility “wellness”: Health facilities management', *Facilities*, 13(9/10), pp.45–48.
- Myeda, N.E., Chua, S.J.L. and Aqillah, N.S. (2023) 'Adopting quality management (QM) principles in managing facilities management service delivery', *International Journal of Quality & Reliability Management*.
- Nazali Mohd Noor, M. and Pitt, M. (2009) 'A critical review on innovation in facilities management service delivery', *Facilities*, 27(5/6), pp.211–228.
- Nazareth, J., Kamath, R., Lakshmi, R.V. and Somu, G. (2023) 'An exploratory study on adherence to Joint Commission International standards on facility management and safety at a tertiary care hospital in Dubai, United Arab Emirates', *Open Access Macedonian Journal of Medical Sciences*, 11(E), pp.271–275.
- Neely, A., Gregory, M. and Platts, K. (1995) 'Performance measurement system design: A literature review and research agenda', *International Journal of Operations & Production Management*, 15(4), pp.80–116.
- Nutt, B. (2000) 'Four competing futures for facility management', *Facilities*, 18(3/4), pp.124–132.
- Okoroh, M.I., Ilozor, B.D. and Gombera, P.P. (2006) 'Modelling of risk management in health care facilities', *Facilities*, 24(5/6), pp.197–210.
- Olanrewaju, A.L., Wong, W.F., Yahya, N.N.H.N. and Im, L.P. (2019) 'Proposed research methodology for establishing the critical success factors for maintenance management of hospital buildings', *AIP Conference Proceedings*, 2157(1).
- Omar, M.F., Ibrahim, F.A. and Omar, W.M.S.W. (2016) 'An assessment of the maintenance management effectiveness of public hospital building through key performance indicators', *Sains Humanika*, 8(4–2).

- Pakrudin, N.A.A., Abdullah, M.N., Asmoni, M., Mei, J.L.Y., Jaafar, M.N. and Mohammed, A.H. (2017) 'Critical success factors for facilities management implementation in the healthcare industry', *International Journal of Real Estate Studies*, 11(2), pp.69–83.
- Pasinringi, S.A. (2021) 'Hospital accreditation and service quality improvement: A systematic evaluation', *International Journal of Health Policy and Management*, 10(9), pp.553–562.
- Pathirage, C., Haigh, R., Amaratunga, D. and Baldry, D. (2008) 'Knowledge management practices in facilities organisations: A case study', *Journal of Facilities Management*, 6(1), pp.5–22.
- Pheng, L.S. and Rui, Z. (2016) *Service quality for facilities management in hospitals*. Singapore: Springer.
- Shohet, I.M., Lavy, S. and Almagor, A. (2004) 'Integrated maintenance management of hospital buildings', *Construction Management and Economics*, 22(9), pp.887– 897.
- Waheed, Z. and Fernie, S. (2009) 'Knowledge-based facilities management', *Facilities*, 27(7/8), pp.258–266.
- Waggie, F. and Arends, N.E. (2021) 'Exploring interprofessional teamwork at a tertiary public hospital in South Africa', *Journal of Interprofessional Care*, 35(5), pp.672–681.
- Wiggins, J.M. (2020) *Facilities manager's desk reference*. 3rd ed. Oxford: Wiley.
- Yousefli, Z., Nasiri, F. and Moselhi, O. (2017) 'Healthcare facilities maintenance management: A literature review', *Journal of Facilities Management*, 15(4), pp.352–375.
- Yuen, P.P. and Ng, A.W. (2012) 'Towards a balanced performance measurement system in a public health care organization', *International Journal of Health Care Quality Assurance*, 25(5), pp.421–430.
- Zamzam, A.H., Abdul Wahab, A.K., Azizan, M.M., Satapathy, S.C., Lai, K.W. and Hasikin, K. (2021) 'A systematic review of medical equipment reliability assessment in improving the quality of healthcare services', *Frontiers in Public Health*, 9, 753951.

GUIDE TO AUTHORS

Aims and Scope:

The Malaysian Construction Research Journal (MCRJ) is the journal dedicated to the documentation of R&D achievements and technological development relevant to the construction industry within Malaysia and elsewhere in the world. It is a collation of research papers and other academic publications produced by researchers, practitioners, industrialists, academicians, and all those involved in the construction industry. The papers cover a wide spectrum encompassing building technology, materials science, information technology, environment, quality, economics and many relevant disciplines that can contribute to the enhancement of knowledge in the construction field. The MCRJ aspire to become the premier communication media amongst knowledge professionals in the construction industry and shall hopefully, breach the knowledge gap currently prevalent between and amongst the knowledge producers and the construction practitioners.

Articles submitted will be reviewed and accepted on the understanding that they have not been published elsewhere. The authors have to fill out the **Declaration of the Authors** form and return the form via fax/email to the secretariat. The length of articles should be **between 3,500 and 8,000 words or approximately 8 – 15 printed pages (final version). The similarity index must be lower than 20% and proofread in UK English.** The Similarity Report and summary of the article (less than 250 words) for editorial must be submitted together with the manuscript.

Authors can submit the manuscript:

- By e-mail in Microsoft-Word format to MCRJ Secretariat to mcrj@cream.my.

Malaysian Construction Research Journal (MCRJ)

Construction Research Institute of Malaysia (CREAM)
Level 14, CIDB 520, The MET Corporate Towers,
No. 20, Jalan Dutamas 2,
50480 Wilayah Persekutuan, Kuala Lumpur,
MALAYSIA.

Tel. : (6)03 – 2779 1479

Fax : (6)03 – 2779 1474

Website : www.cream.my

Language: Follow the spelling of the Oxford English Dictionary.

Size/Page Setup: Executive (18.42 cm x 26.67 cm)

Margin: Top - 3cm, Bottom, Left and Right – 2.01cm

Paper title: Arial, 16.

CODIFICATION AND APPLICATION OF SEMI-LOOF ELEMENTS FOR COMPLEX STRUCTURES

(FULL NAME) Ahmad Abd Rahman^{1,2}, Maria Diyana Musa² and Sumiana Yusoff²

¹*Department of Quantity Surveying, Faculty of Architecture, Planning and Surveying, Universiti Teknologi MARA, Sarawak, Malaysia*

²*Institute of Ocean and Earth Sciences (IOES), University of Malaya, Malaysia*

Abstract (Arial Bold, 9pt)

Damage assessment (Arial, 9pt. Left and right indent 0.64 cm, it should be single paragraph of about 100 – 250 words.)

Keywords:(Arial Bold, 9pt) *Finite Element Analysis; Modal Analysis; Mode Shape; Natural Frequency; Plate Structure (Time New Roman, 9pt)*

HEADING 1 (Arial Bold + Upper Case, 11pt)

Heading 2 (Arial Bold + Lower Case, 11pt)

Heading 3 (Arial Italic + Lower Case, 11pt)

Body Text: Times New Roman, 11 pt. All paragraph must be differentiated by 0.64 cm tab.

Figures: Figures should be in box with line width 0.5pt. All illustrations and photographs must be numbered consecutively as it appears in the text and accompanied with appropriate captions below them.

Figures caption: Arial Bold + Arial, 9pt. + Capitalize Each Word, should be written below the figures.

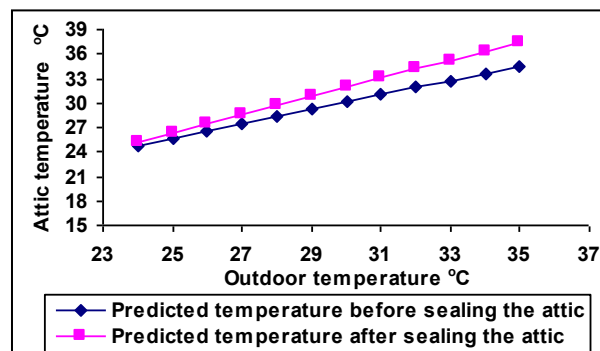


Figure 1. Computed Attic Temperature with Sealed and Ventilated Attic

Tables: Arial, 8pt. Table should be incorporated in the text.

Table caption: Arial Bold + Arial, 9pt. + Capitalize Each Word. Captions should be written above the table.

Table Line: 0.5pt.

Table 1. Recommended/Acceptable Physical Water Quality Criteria

Parameter	Raw Water Quality	Drinking Water Quality
Total coliform (MPN/100ml)	500	0
Turbidity (NTU)	1000	5
Color (Hazen)	300	15
pH	5.5-9.0	6.5-9.0

(Source: Twort et al., 1985; MWA, 1994)

Units: All units and abbreviations of dimensions should conform to **SI standards**.

Citation:

Passage Type	First Reference in Text	Next Reference in Text	Bracket Format, First Reference in Text	Bracket Format, Next Reference Marker in Text
One author	Walker (2007)	(Walker, 2007)	(Walker, 2007)	(Walker, 2007)
Two authors	Walker and Allen (2004)	Walker and Allen (2004)	(Walker & Allen, 2004)	(Walker & Allen, 2004)
Three authors	Bradley, Ramirez, and Soo (1999)	Bradley et al. (1999)	(Bradley, Ramirez, & Soo, 1999)	(Bradley et al., 1999)
Four authors	Bradley, Ramirez, Soo, and Walsh (2006)	Bradley et al. (2006)	(Bradley, Ramirez, Soo, & Walsh, 2006)	(Bradley et al., 2006)
Five authors	Walker, Allen, Bradley, Ramirez, and Soo (2008)	Walker et al. (2008)	(Walker, Allen, Bradley, Ramirez, & Soo, 2008)	(Walker et al., 2008)
Six or more authors	Wasserstein et al (2005)	Wasserstein et al. (2005)	(Wasserstein et al., 2005)	(Wasserstein et al., 2005)
Organisation (easily identified by the initials) as the author	Sultan Idris Education University (UPSI, 2013)	UPSI (2013)	(Sultan Idris Education University [UPSI], 2013)	(UPSI, 2013)
Organisation (No abbreviation) as the author	Pittsburgh University (2005)	Pittsburgh University (2005)	(Pittsburgh University, 2005)	(Pittsburgh University, 2005)

(Source: UPSI, 2019)

Reference: Times New Roman, 11pt. Left indent 0.64 cm, first line left indent – 0.64 cm.

References should be listed in **alphabetical order**, on separate sheets from the text. In the list of references, the titles of periodicals should be given in full, while for books should state the title, place of publication, name of publisher, and indication of edition.

Johan, R. (1999) Fire Management Plan for The Peat Swamp Forest Reserve of North Selangor and Pahang. In Chin T.Y. and Havmoller, P. (eds) Sustainable Management of Peat Swamp Forests in Peninsular Malaysia Vol II: Impacts. Kuala Lumpur: Forestry Department Malaysia, 81-147.

Siti Hawa, H., Yong, C. B. and Wan Hamidon W. B. (2004) Butt Joint in Dry Board as Crack Arrestor. Proceeding of 22nd Conference of ASEAN Federation of Engineering Organisation (CAFEO 22). Myanmar, 55-64.

Skumatz, L. A. (1993) Variable Rate for Municipal Solid Waste: Implementation, Experience, Economics and Legislation. Los Angeles: Reason Foundation, 157 pp.

Sze, K. Y. (1994) Simple Semi-Loof Element for Analysing Folded-Plate Structures. Journal of Engineering Mechanics, 120(1):120-134.

Wong, A. H. H. (1993) Susceptibility to Soft Rot Decay in Copper-Chrome-Arsenic Treated and Untreated Malaysian Hardwoods. Ph.D. Thesis, University of Oxford. 341 pp.

Publication	References Formatting
Journal	Sze, K. Y. (1994) Simple Semi-Loof Element for Analysing Folded-Plate Structures. Journal of Engineering Mechanics, 120(1):120-134.
Books	Skumatz, L. A. (1993) Variable Rate for Municipal Solid Waste: Implementation, Experience, Economics and Legislation. Los Angeles: Reason Foundation, 157 pp.
Thesis	Wong, A. H. H. (1993) Susceptibility to Soft Rot Decay in Copper-Chrome-Arsenic Treated and Untreated Malaysian Hardwoods. Ph.D. Thesis, University of Oxford. 341 pp.
Chapter in book	Johan, R. (1999) Fire Management Plan for The Peat Swamp Forest Reserve of North Selangor and Pahang. In Chin T.Y. and Havmoller, P. (eds) Sustainable Management of Peat Swamp Forests in Peninsular Malaysia Vol II: Impacts. Kuala Lumpur: Forestry Department Malaysia, 81-147.
Proceedings	Siti Hawa, H., Yong, C. B. and Wan Hamidon W. B. (2004) Butt Joint in Dry Board as Crack Arrestor. Proceeding of 22nd Conference of ASEAN Federation of Engineering Organisation (CAFEO 22). Myanmar, 55-64.

Contents

Editorial Advisory Board

Editorial

SUSTAINABLE GROUND IMPROVEMENT USING BAMBOO-GEOTEXTILE REINFORCEMENT AND REAL-TIME MONITORING WITH FIBER OPTIC TECHNOLOGY

Nasfiza Mokhtar, Adnan Zainorabidin, Kasbi Basri, Bun Pin Tee, Low Kaw Sai and Sher Ern Chong

SSSTRATEGIC AGILITY: NAVIGATING THE PAKISTANI CONSTRUCTION INDUSTRY THROUGH AGILE SOLUTIONS

Jahanzeb Asim and Muneera Esa

SUSTAINABLE DESIGN CRITERIA FOR GREEN OFFICE BUILDINGS

Shalini Sanmargaraja, AbdulLateef Olanrewaju, Muhammad Tarique Lakhia, Chong Hooi Lim, Vignes Ponniah and Anselm Dass Mathalamuthu

ASSESSING ARTIFICIAL INTELLIGENCE (AI) ADOPTION LEVELS IN THE CONSTRUCTION INDUSTRIES OF ZAMBIA AND KENYA

Maria Achieng Akulu, Charles Kahanji, Rahimi A. Rahman and Erastus Misheng'u Mwanaumo

UNLOCKING SUSTAINABLE FUTURES: A SYSTEMATIC REVIEW ON THE BENEFITS OF INDUSTRIALIZED BUILDING SYSTEM (IBS)

Nadzirah Zainordin, Lou Hai Loon, Sui Lai Khoo, Mohammad Fadhil Mohammad, Ahmad Faris Omar, Salmaliza Salleh, Quoc-Bao Bui and Le To Quyen

EXPLORING THE SYNERGY BETWEEN DIGITALISATION AND SUSTAINABILITY: INSIGHTS FROM MALAYSIAN QUANTITY SURVEYORS

Sui Lai Khoo, Nadzirah Zainordin, Norshakila Muhamad Rawai, Mohammad Reizal Mohammad Ali and Edna Bujang Safawi

INTEGRATED OF SAFETY PERFORMANCE VIA PROJECT MANAGERS' COMPETENCIES IN GREEN CONSTRUCTION: A REVIEW OF ASSESSMENT COMPONENTS AND CONCEPTUAL FRAMEWORK

Jannatun Naemah Ismam, Ida Nianti Mohd Zin and Natasha Khalil

ANALYSING SUCCESS FACTORS OF FACILITIES MANAGEMENT IMPLEMENTATION INTERDEPENDENCIES IN HEALTHCARE USING INTERPRETIVE STRUCTURAL MODELLING

Nur Azrin Ahmad Pakrudin, Mat Naim Abdullah @ Mohd Asmoni, Hariati Abdullah Hashim, Mohd Nadzri Jaafar, Noorizan Ahmad and Ahmad Sha'rainon Md Shaarani

ISSN 1985-3807



9 771985 380005

eISSN 2590-4140



9 772590 414000